

Exam Questions N10-008

CompTIA Network+Exam

<https://www.2passeasy.com/dumps/N10-008/>



NEW QUESTION 1

- (Topic 1)

A network technician needs to ensure outside users are unable to telnet into any of the servers at the datacenter. Which of the following ports should be blocked when checking firewall configuration?

- A. 22
- B. 23
- C. 80
- D. 3389
- E. 8080

Answer: B

Explanation:

Port 23 should be blocked when checking firewall configuration to prevent outside users from telnetting into any of the servers at the datacenter. Port 23 is the default port for Telnet, which is an insecure protocol that allows remote access to servers and network devices. Telnet sends data in clear text, which can be easily intercepted and compromised by attackers. A more secure alternative is SSH, which uses port 22 and encrypts data. References: <https://www.cisco.com/c/en/us/support/docs/ip/routing-information-protocol-rip/13788-3.html>

NEW QUESTION 2

- (Topic 1)

A network engineer is investigating reports of poor network performance. Upon reviewing a report, the engineer finds that jitter at the office is greater than 10ms on the only WAN connection available. Which of the following would be MOST affected by this statistic?

- A. A VoIP sales call with a customer
- B. An in-office video call with a coworker
- C. Routing table from the ISP
- D. Firewall CPU processing time

Answer: A

Explanation:

A VoIP sales call with a customer would be most affected by jitter greater than 10ms on the WAN connection. Jitter is the variation in delay of packets arriving at the destination. It can cause choppy or distorted audio quality for VoIP applications, especially over WAN links that have limited bandwidth and high latency. The recommended jitter for VoIP is less than 10ms. References: <https://www.voip-info.org/voip-jitter/>

NEW QUESTION 3

- (Topic 1)

A branch of a company recently switched to a new ISP. The network engineer was given a new IP range to assign. The ISP assigned 196.26.4.0/26, and the branch gateway router now has the following configurations on the interface that peers to the ISP:

IP address:	196.26.4.30
Subnet mask:	255.255.255.224
Gateway:	196.24.4.1

The network engineer observes that all users have lost Internet connectivity. Which of the following describes the issue?

- A. The incorrect subnet mask was configured
- B. The incorrect gateway was configured
- C. The incorrect IP address was configured
- D. The incorrect interface was configured

Answer: C

Explanation:

The IP address configured on the router interface is 196.26.4.1/26, which belongs to the IP range assigned by the ISP (196.26.4.0/26). However, this IP address is not valid for this interface because it is the network address of the subnet, which cannot be assigned to any host device. The network address is the first address of a subnet that identifies the subnet itself. The valid IP addresses for this subnet are from 196.26.4.1 to 196.26.4.62, excluding the network address (196.26.4.0) and the broadcast address (196.26.4.63). The router interface should be configured with a valid IP address within this range to restore Internet connectivity for all users. References: [https://partners.comptia.org/docs/default-source/resources/comptia-network-n10-008-exam-objectives-\(2-0\)](https://partners.comptia.org/docs/default-source/resources/comptia-network-n10-008-exam-objectives-(2-0)), <https://www.techopedia.com/definition/24136/network-address>

NEW QUESTION 4

- (Topic 1)

Branch users are experiencing issues with videoconferencing. Which of the following will the company MOST likely configure to improve performance for these applications?

- A. Link Aggregation Control Protocol
- B. Dynamic routing
- C. Quality of service
- D. Network load balancer
- E. Static IP addresses

Answer: C

Explanation:

To improve performance for videoconferencing, the company should configure Quality of Service (QoS). This technology allows for the prioritization of network traffic, ensuring that videoconferencing traffic is given higher priority and therefore better performance. Link Aggregation Control Protocol (LACP), Dynamic routing, Network load balancer, and Static IP addresses are not directly related to improving performance for videoconferencing.

References:

? Network+ N10-007 Certification Exam Objectives, Objective 2.6: Given a scenario, implement and configure the appropriate wireless security and implement the appropriate QoS concepts.

NEW QUESTION 5

- (Topic 1)

A website administrator is concerned the company's static website could be defaced by hackers or used as a pivot point to attack internal systems. Which of the following should a network security administrator recommend to assist with detecting these activities?

- A. Implement file integrity monitoring.
- B. Change the default credentials.
- C. Use SSL encryption.
- D. Update the web-server software.

Answer: A

Explanation:

Implementing file integrity monitoring (FIM) would assist with detecting activities such as website defacement or internal system attacks. FIM is a process that monitors and alerts on changes to files or directories that are critical for security or functionality. FIM can help detect unauthorized modifications, malware infections, data breaches, or configuration errors. FIM can also help with compliance and auditing requirements. References: <https://www.tripwire.com/state-of-security/security-data-protection/cyber-security/what-is-file-integrity-monitoring/>

NEW QUESTION 6

- (Topic 1)

A network administrator is installing a wireless network at a client's office. Which of the following IEEE 802.11 standards would be BEST to use for multiple simultaneous client access?

- A. CDMA
- B. CSMA/CD
- C. CSMA/CA
- D. GSM

Answer: C

Explanation:

CSMA/CA (Carrier Sense Multiple Access with Collision Avoidance) is an IEEE 802.11 standard that would be best to use for multiple simultaneous client access on a wireless network. CSMA/CA is a media access control method that allows multiple devices to share the same wireless channel without causing collisions or interference. It works by having each device sense the channel before transmitting data and waiting for an acknowledgment from the receiver after each transmission. If the channel is busy or no acknowledgment is received, the device will back off and retry later with a random delay. References: <https://www.cisco.com/c/en/us/support/docs/wireless-mobility/wireless-lan-wlan/82068-csma-ca.html>

NEW QUESTION 7

- (Topic 1)

Which of the following BEST describes a network appliance that warns of unapproved devices that are accessing the network?

- A. Firewall
- B. AP
- C. Proxy server
- D. IDS

Answer: D

Explanation:

IDS stands for intrusion detection system, which is a network appliance that monitors network traffic and alerts administrators of any suspicious or malicious activity. An IDS can warn of unapproved devices that are accessing the network by detecting anomalies, signatures, or behaviors that indicate unauthorized access attempts or attacks. References: [https://partners.comptia.org/docs/default-source/resources/comptia-network-n10-008-exam-objectives-\(2-0\)](https://partners.comptia.org/docs/default-source/resources/comptia-network-n10-008-exam-objectives-(2-0)), <https://www.cisco.com/c/en/us/products/security/what-is-an-intrusion-detection-system-ids.html>

NEW QUESTION 8

- (Topic 1)

A technician is troubleshooting a network switch that seems to stop responding to requests intermittently whenever the logging level is set for debugging. Which of the following metrics should the technician check to begin troubleshooting the issue?

- A. Audit logs
- B. CPU utilization
- C. CRC errors
- D. Jitter

Answer: B

Explanation:

CPU utilization is a metric that measures the percentage of time a CPU spends executing instructions. When the logging level is set for debugging, the router may

generate a large amount of logging data, which can increase CPU utilization and cause the router to stop responding to requests intermittently. References:
? Network+ N10-008 Objectives: 2.1 Given a scenario, troubleshoot common physical connectivity issues.

NEW QUESTION 9

- (Topic 1)

A company built a new building at its headquarters location. The new building is connected to the company's LAN via fiber-optic cable. Multiple users in the new building are unable to access the company's intranet site via their web browser, but they are able to access internet sites. Which of the following describes how the network administrator can resolve this issue?

- A. Correct the DNS server entries in the DHCP scope
- B. Correct the external firewall gateway address
- C. Correct the NTP server settings on the clients
- D. Correct a TFTP Issue on the company's server

Answer: A

Explanation:

If multiple users in a new building are unable to access the company's intranet site via their web browser but are able to access internet sites, the network administrator can resolve this issue by correcting the DNS server entries in the DHCP scope. The DHCP scope is responsible for assigning IP addresses and DNS server addresses to clients. If the DNS server entries are incorrect, clients will not be able to access intranet sites.

References:

? CompTIA Network+ Certification Study Guide, Exam N10-007, Fourth Edition, Chapter 4: Network Implementations, Objective 4.4: Explain the purpose and properties of DHCP.

NEW QUESTION 10

- (Topic 1)

Which of the following transceiver types can support up to 40Gbps?

- A. SFP+
- B. QSFP+
- C. QSFP
- D. SFP

Answer: B

Explanation:

QSFP+ is a transceiver type that can support up to 40Gbps. It stands for Quad Small Form-factor Pluggable Plus and uses four lanes of data to achieve high-speed transmission. It is commonly used for data center and high-performance computing applications. References:

https://www.cisco.com/c/en/us/products/collateral/interfaces-modules/transceiver-modules/data_sheet_c78-660083.html

NEW QUESTION 10

- (Topic 1)

An administrator is writing a script to periodically log the IPv6 and MAC addresses of all the devices on a network segment. Which of the following switch features will MOST likely be used to assist with this task?

- A. Spanning Tree Protocol
- B. Neighbor Discovery Protocol
- C. Link Aggregation Control Protocol
- D. Address Resolution Protocol

Answer: B

Explanation:

The switch feature that is most likely to be used to assist with logging IPv6 and MAC addresses of devices on a network segment is Neighbor Discovery Protocol (NDP). NDP is used by IPv6 to discover and maintain information about other nodes on the network, including their IPv6 and MAC addresses. By periodically querying NDP, the administrator can log this information for auditing purposes. References:

? CompTIA Network+ Certification Study Guide, Exam N10-007, Fourth Edition,

Chapter 2: The OSI Model and Networking Protocols, Objective 2.1: Compare and contrast TCP and UDP ports, protocols, and their purposes.

NEW QUESTION 13

- (Topic 1)

A network administrator discovers that users in an adjacent building are connecting to the company's guest wireless network to download inappropriate material. Which of the following can the administrator do to MOST easily mitigate this issue?

- A. Reduce the wireless power levels
- B. Adjust the wireless channels
- C. Enable wireless client isolation
- D. Enable wireless port security

Answer: A

Explanation:

Reducing the wireless power levels can limit the range of the guest wireless network and prevent users in an adjacent building from connecting to it. Adjusting the wireless channels or enabling wireless client isolation will not affect the signal strength or coverage of the guest network. Enabling wireless port security will not work on a guest network that does not use authentication or MAC address filtering. References: CompTIA Network+ Certification Exam Objectives Version 2.0 (Exam Number: N10-006), Domain 2.0 Network Operations, Objective 2.5 Given a scenario, implement appropriate wireless configuration settings; Guest WiFi Security - Cisco Umbrella

NEW QUESTION 17

- (Topic 1)

A network technician is manually configuring the network settings for a new device and is told the network block is 192.168.0.0/20. Which of the following subnets should the technician use?

- A. 255.255.128.0
- B. 255.255.192.0
- C. 255.255.240.0
- D. 255.255.248.0

Answer: C

Explanation:

A subnet mask is a binary number that indicates which bits of an IP address belong to the network portion and which bits belong to the host portion. A slash notation (/n) indicates how many bits are used for the network portion. A /20 notation means that 20 bits are used for the network portion and 12 bits are used for the host portion. To convert /20 to a dotted decimal notation, we need to write 20 ones followed by 12 zeros in binary and then divide them into four octets separated by dots. This gives us 11111111.11111111.11110000.00000000 or 255.255.240.0 in decimal. References: [https://partners.comptia.org/docs/default-source/resources/comptia-network-n10-008-exam-objectives-\(2-0\)](https://partners.comptia.org/docs/default-source/resources/comptia-network-n10-008-exam-objectives-(2-0)), <https://www.techopedia.com/definition/950/subnet-mask>

NEW QUESTION 21

- (Topic 1)

Which of the following is the physical topology for an Ethernet LAN?

- A. Bus
- B. Ring
- C. Mesh
- D. Star

Answer: D

Explanation:

In a star topology, all devices on a network connect to a central hub or switch, which acts as a common connection point. Ethernet LANs typically use a star topology, with each device connected to a central switch. References:

? Network+ N10-008 Objectives: 2.2 Explain common logical network topologies and their characteristics.

NEW QUESTION 25

- (Topic 1)

An attacker is attempting to find the password to a network by inputting common words and phrases in plaintext to the password prompt. Which of the following attack types BEST describes this action?

- A. Pass-the-hash attack
- B. Rainbow table attack
- C. Brute-force attack
- D. Dictionary attack

Answer: D

Explanation:

The attacker attempting to find the password to a network by inputting common words and phrases in plaintext to the password prompt is using a dictionary attack. References: CompTIA Network+ Certification Study Guide, Chapter 6: Network Attacks and Mitigation.

NEW QUESTION 30

- (Topic 1)

A client recently added 100 users who are using VMs. All users have since reported slow or unresponsive desktops. Reports show minimal network congestion, zero packet loss, and acceptable packet delay. Which of the following metrics will MOST accurately show the underlying performance issues? (Choose two.)

- A. CPU usage
- B. Memory
- C. Temperature
- D. Bandwidth
- E. Latency
- F. Jitter

Answer: AB

NEW QUESTION 31

- (Topic 1)

Which of the following factors should be considered when evaluating a firewall to protect a datacenter's east-west traffic?

- A. Replication traffic between an on-premises server and a remote backup facility
- B. Traffic between VMs running on different hosts
- C. Concurrent connections generated by Internet DDoS attacks
- D. VPN traffic from remote offices to the datacenter's VMs

Answer: B

Explanation:

When evaluating a firewall to protect a datacenter's east-west traffic, it is important to consider traffic between VMs running on different hosts. This type of traffic is referred to as east-west traffic and is often protected by internal firewalls. By implementing firewalls, an organization can protect their internal network against threats such as lateral movement, which can be caused by attackers who have breached a perimeter firewall. References: Network+ Certification Study Guide, Chapter 5: Network Security

NEW QUESTION 32

- (Topic 1)

Which of the following technologies provides a failover mechanism for the default gateway?

- A. FHRP
- B. LACP
- C. OSPF
- D. STP

Answer: A

Explanation:

First Hop Redundancy Protocol (FHRP) provides a failover mechanism for the default gateway, allowing a backup gateway to take over if the primary gateway fails. References: CompTIA Network+ Certification Study Guide, Chapter 4: Infrastructure.

NEW QUESTION 36

- (Topic 1)

A workstation is configured with the following network details:

IP address	Subnet mask	Default gateway
10.1.2.23	10.1.2.0/27	10.1.2.1

Software on the workstation needs to send a query to the local subnet broadcast address. To which of the following addresses should the software be configured to send the query?

- A. 10.1.2.0
- B. 10.1.2.1
- C. 10.1.2.23
- D. 10.1.2.255
- E. 10.1.2.31

Answer: D

Explanation:

The software on the workstation should be configured to send the query to 10.1.2.255, which is the local subnet broadcast address. A broadcast address is a special address that allows a device to send a message to all devices on the same subnet. It is usually derived by setting all the host bits to 1 in the network address. In this case, the network address is 10.1.2.0/27, which has 27 network bits and 5 host bits. By setting all the host bits to 1, we get 10.1.2.31 as the broadcast address in decimal notation, or 10.1.2.255 in dotted decimal notation. References: <https://www.cisco.com/c/en/us/support/docs/ip/routing-information-protocol-rip/13788-3.html>

NEW QUESTION 39

- (Topic 1)

A network administrator walks into a datacenter and notices an unknown person is following closely. The administrator stops and directs the person to the security desk. Which of the following attacks did the network administrator prevent?

- A. Evil twin
- B. Tailgating
- C. Piggybacking
- D. Shoulder surfing

Answer: B

Explanation:

Tailgating is a physical security attack where an unauthorized person follows an authorized person into a restricted area without proper identification or authorization. The network administrator prevented this attack by stopping and directing the person to the security desk. References: CompTIA Network+ Certification Exam Objectives Version 2.0 (Exam Number: N10-006), Domain 3.0 Network Security, Objective 3.1 Compare and contrast risk-related concepts.

NEW QUESTION 40

- (Topic 1)

Which of the following TCP ports is used by the Windows OS for file sharing?

- A. 53
- B. 389
- C. 445
- D. 1433

Answer: C

Explanation:

TCP port 445 is used by the Windows OS for file sharing. It is also known as SMB (Server Message Block) or CIFS (Common Internet File System) and allows users to access files, printers, and other shared resources on a network. References: <https://docs.microsoft.com/en-us/windows-server/storage/file-server/troubleshoot/detect-enable-and-disable-smbv1-v2-v3>

NEW QUESTION 41

- (Topic 1)

Which of the following ports is commonly used by VoIP phones?

- A. 20
- B. 143
- C. 445
- D. 5060

Answer: D**Explanation:**

TCP/UDP port 5060 is commonly used by VoIP phones. It is the default port for SIP (Session Initiation Protocol), which is a signaling protocol that establishes, modifies, and terminates multimedia sessions over IP networks. SIP is widely used for VoIP applications such as voice and video calls. References: <https://www.voip-info.org/session-initiation-protocol/>

NEW QUESTION 42

- (Topic 1)

Given the following information:

Protocol	Local address	Foreign address	State
TCP	127.0.0.1:57779	Desktop-Open:57780	Established
TCP	127.0.0.1:57780	Desktop-Open:57779	Established

Which of the following command-line tools would generate this output?

- A. netstat
- B. arp
- C. dig
- D. tracert

Answer: D**Explanation:**

Tracert is a command-line tool that traces the route of a packet from a source to a destination and displays the number of hops and the round-trip time for each hop. The output shown in the question is an example of a tracert output, which shows five hops with their IP addresses and hostnames (if available) and three latency measurements for each hop in milliseconds. References: [https://partners.comptia.org/docs/default-source/resources/comptia-network-n10-008-exam-objectives-\(2-0\)](https://partners.comptia.org/docs/default-source/resources/comptia-network-n10-008-exam-objectives-(2-0)), <https://www.lumen.com/help/en-us/network/traceroute/understanding-the-traceroute-output.html>

NEW QUESTION 44

- (Topic 1)

An engineer is configuring redundant network links between switches. Which of the following should the engineer enable to prevent network stability issues?

- A. 802.1Q
- B. STP
- C. Flow control
- D. CSMA/CD

Answer: B**Explanation:**

Spanning Tree Protocol (STP) should be enabled when configuring redundant network links between switches. STP ensures that only one active path is used at a time, preventing network loops and stability issues.

References:

? CompTIA Network+ Certification Study Guide

NEW QUESTION 49

- (Topic 1)

A network engineer performs the following tasks to increase server bandwidth: Connects two network cables from the server to a switch stack
Configure LACP on the switchports

Verifies the correct configurations on the switch interfaces Which of the following needs to be configured on the server?

- A. Load balancing
- B. Multipathing
- C. NIC teaming
- D. Clustering

Answer: C**Explanation:**

NIC teaming is a technique that combines two or more network interface cards (NICs) on a server into a single logical interface that can increase bandwidth, provide redundancy, and balance traffic. NIC teaming can be configured with different modes and algorithms depending on the desired outcome. Link Aggregation Control Protocol (LACP) is a protocol that enables NIC teaming by dynamically bundling multiple links between two devices into one logical link. References: [https://partners.comptia.org/docs/default-source/resources/comptia-network-n10-008-exam-objectives-\(2-0\)](https://partners.comptia.org/docs/default-source/resources/comptia-network-n10-008-exam-objectives-(2-0)), <https://docs.microsoft.com/en-us/windows-server/networking/technologies/nic-teaming/nic-teaming>

NEW QUESTION 52

- (Topic 1)

A company hired a technician to find all the devices connected within a network. Which of the following software tools would BEST assist the technician in completing this task?

- A. IP scanner
- B. Terminal emulator
- C. NetFlow analyzer
- D. Port scanner

Answer: A

Explanation:

To find all devices connected within a network, a technician can use an IP scanner. An IP scanner sends a ping request to all IP addresses within a specified range and then identifies the active devices that respond to the request.

NEW QUESTION 53

- (Topic 1)

A technician needs to configure a Linux computer for network monitoring. The technician has the following information:

Linux computer details:

Interface	IP address	MAC address
eth0	10.1.2.24	A1:B2:C3:F4:E5:D6

Switch mirror port details:

Interface	IP address	MAC address
eth1	10.1.2.3	A1:B2:C3:D4:E5:F6

After connecting the Linux computer to the mirror port on the switch, which of the following commands should the technician run on the Linux computer?

- A. `ifconfig eth0 promisc`
- B. `ifconfig eth1 up`
- C. `ifconfig eth0 10.1.2.3`
- D. `ifconfig eth1 hw ether A1:B2:C3:D4:E5:F6`

Answer: A

Explanation:

The `ifconfig eth0 promisc` command should be run on the Linux computer to enable promiscuous mode, which allows the computer to capture all network traffic passing through the switch mirror port. References: CompTIA Network+ Certification Study Guide, Chapter 7: Network Devices.

NEW QUESTION 58

- (Topic 1)

The network administrator is informed that a user's email password is frequently hacked by brute-force programs. Which of the following policies should the network administrator implement to BEST mitigate this issue? (Choose two.)

- A. Captive portal
- B. Two-factor authentication
- C. Complex passwords
- D. Geofencing
- E. Role-based access
- F. Explicit deny

Answer: BC

Explanation:

Two-factor authentication (2FA) is a method of verifying a user's identity by requiring two pieces of evidence, such as something the user knows (e.g., a password) and something the user has (e.g., a token or a smartphone). 2FA adds an extra layer of security that makes it harder for hackers to access a user's account by brute-force programs. Complex passwords are passwords that are long, random, and use a combination of uppercase and lowercase letters, numbers, and symbols. Complex passwords are more resistant to brute-force attacks than simple or common passwords. References:

[https://partners.comptia.org/docs/default-source/resources/comptia-network-n10-008-exam-objectives-\(2-0\)](https://partners.comptia.org/docs/default-source/resources/comptia-network-n10-008-exam-objectives-(2-0)), <https://www.csoononline.com/article/3225913/what-is-two-factor-authentication-2fa-how-to-enable-it-and-why-you-should.html>, <https://www.howtogeek.com/195430/how-to-create-a-strong-password-and-remember-it/>

NEW QUESTION 59

- (Topic 1)

Which of the following provides redundancy on a file server to ensure the server is still connected to a LAN even in the event of a port failure on a switch?

- A. NIC teaming
- B. Load balancer
- C. RAID array
- D. PDUs

Answer: A

Explanation:

NIC teaming, also known as network interface card teaming or link aggregation, allows multiple network interface cards to be grouped together to provide redundancy and increased throughput. In the event of a port failure on a switch, NIC teaming ensures that the file server remains connected to the LAN by automatically switching to another network interface card.

References: CompTIA Network+ Certification Study Guide, Sixth Edition by Glen E. Clarke

NEW QUESTION 61

- (Topic 1)

A technician is searching for a device that is connected to the network and has the device's physical network address. Which of the following should the technician review on the switch to locate the device's network port?

- A. IP route table
- B. VLAN tag
- C. MAC table
- D. QoS tag

Answer: C

Explanation:

To locate a device's network port on a switch, a technician should review the switch's MAC address table. The MAC address table maintains a list of MAC addresses of devices connected to each port on the switch. By checking the MAC address of the device in question, the technician can identify the port to which the device is connected. References: CompTIA Network+ Certification Study Guide, Sixth Edition by Glen E. Clarke

NEW QUESTION 64

- (Topic 1)

A user tries to ping 192.168.1.100 from the command prompt on the 192.168.2.101 network but gets the following response: U.U.U.U. Which of the following needs to be configured for these networks to reach each other?

- A. Network address translation
- B. Default gateway
- C. Loopback
- D. Routing protocol

Answer: B

Explanation:

A default gateway is a device that routes traffic from one network to another network, such as the Internet. A default gateway is usually configured on each host device to specify the IP address of the router that connects the host's network to other networks. In this case, the user's device and the destination device are on different networks (192.168.1.0/24 and 192.168.2.0/24), so the user needs to configure a default gateway on their device to reach the destination device.

References: [https://partners.comptia.org/docs/default-source/resources/comptia-network-n10-008-exam-objectives-\(2-0\)](https://partners.comptia.org/docs/default-source/resources/comptia-network-n10-008-exam-objectives-(2-0)),
<https://www.techopedia.com/definition/25761/default-gateway>

NEW QUESTION 65

SIMULATION - (Topic 1)

You are tasked with verifying the following requirements are met in order to ensure network security.

Requirements: Datacenter

Ensure network is subnetted to allow all devices to communicate properly while minimizing address space usage

Provide a dedicated server to resolve IP addresses and hostnames correctly and handle port 53 traffic

Building A

Ensure network is subnetted to allow all devices to communicate properly while minimizing address space usage

Provide devices to support 5 additional different office users Add an additional mobile user

Replace the Telnet server with a more secure solution Screened subnet


Ensure network is subnetted to allow all devices to communicate properly while minimizing address space usage

Provide a server to handle external 80/443 traffic Provide a server to handle port 20/21 traffic INSTRUCTIONS

Drag and drop objects onto the appropriate locations. Objects can be used multiple times and not all placeholders need to be filled.

Available objects are located in both the Servers and Devices tabs of the Drag & Drop menu.

If at any time you would like to bring back the initial state of the simulation, please click the Reset All button.

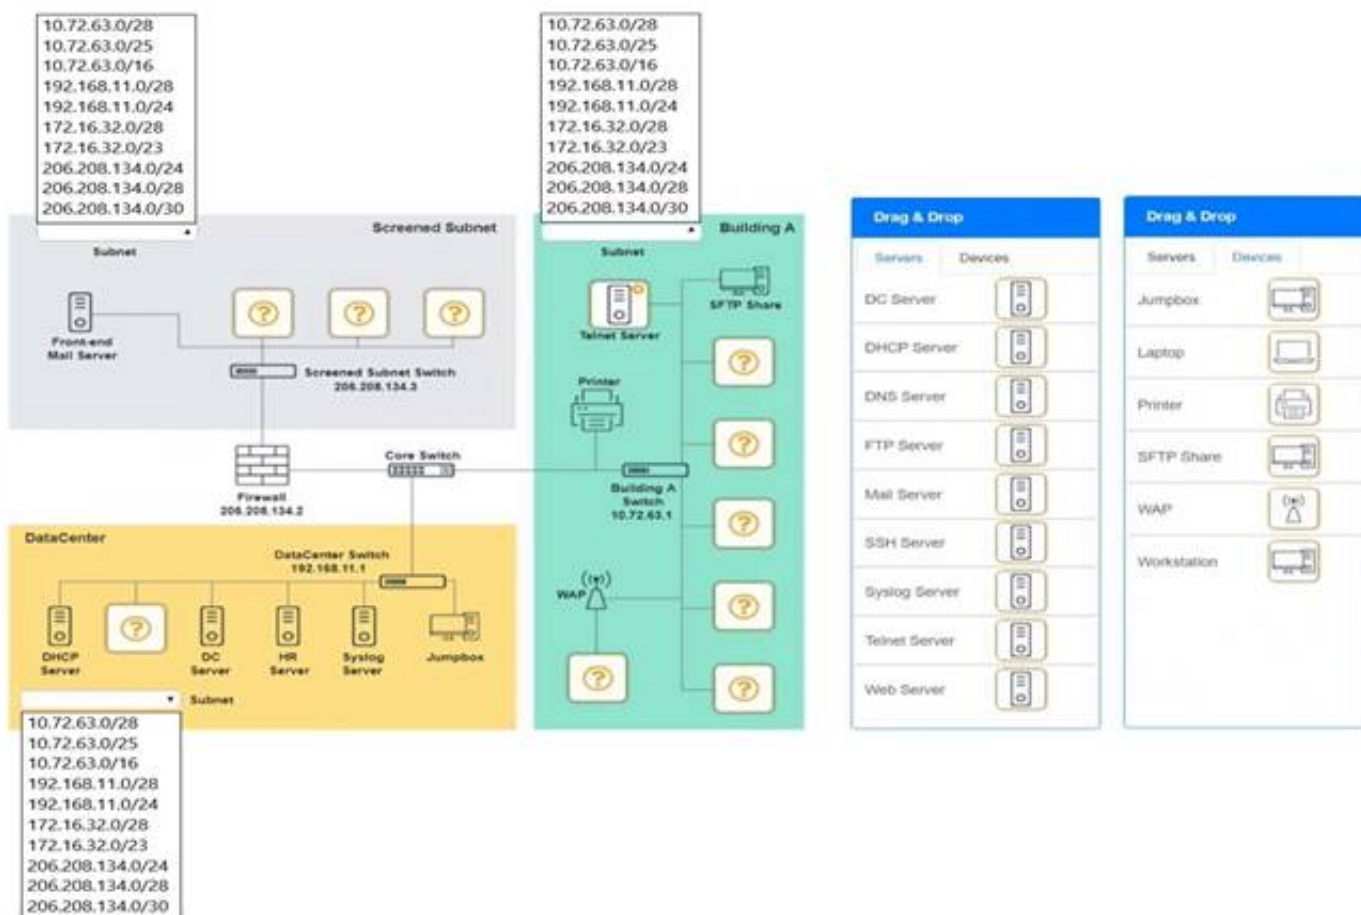

A. Mastered

B. Not Mastered

Answer: A

Explanation:

Screened Subnet devices – Web server, FTP server

Building A devices – SSH server top left, workstations on all 5 on the right, laptop on bottom left

DataCenter devices – DNS server.



A screenshot of a computer
 Description automatically generated

NEW QUESTION 69

- (Topic 1)

A technician is troubleshooting a wireless connectivity issue in a small office located in a high-rise building. Several APs are mounted in this office. The users report that the network connections frequently disconnect and reconnect throughout the day. Which of the following is the MOST likely cause of this issue?

- A. The AP association time is set too low
- B. EIRP needs to be boosted
- C. Channel overlap is occurring
- D. The RSSI is misreported

Answer: C

Explanation:

Channel overlap is a common cause of wireless connectivity issues, especially in high-density environments where multiple APs are operating on the same or adjacent frequencies. Channel overlap can cause interference, signal degradation, and performance loss for wireless devices. The AP association time, EIRP, and RSSI are not likely to cause frequent disconnects and reconnects for wireless users.

NEW QUESTION 71

- (Topic 1)

Several WIFI users are reporting the inability to connect to the network. WLAN users on the guest network are able to access all network resources without any performance issues. The following table summarizes the findings after a site survey of the area in question:

Location	AP 1	AP 2	AP 3	AP 4
SSID	Corp1	Corp1	Corp1/Guest	Corp1/Guest
Channel	2	1	5	11
RSSI	-81dBm	-82dBm	-44dBm	-41dBm
Antenna type	Omni	Omni	Directional	Directional

Which of the following should a wireless technician do NEXT to troubleshoot this issue?

- A. Reconfigure the channels to reduce overlap
- B. Replace the omni antennas with directional antennas
- C. Update the SSIDs on all the APs
- D. Decrease power in AP 3 and AP 4

Answer: B

Explanation:

Based on the site survey table, we can see that AP 2, AP 3, and AP 4 are all broadcasting on the same channel, which can cause interference and affect performance. Therefore, the next step a wireless technician should take to troubleshoot this issue is to reconfigure the channels to reduce overlap. This will help to improve network performance and eliminate any interference.

References:

? Network+ N10-007 Certification Exam Objectives, Objective 2.8: Given a scenario, troubleshoot common wireless problems and perform site surveys.

NEW QUESTION 72

- (Topic 1)

A user reports being unable to access network resources after making some changes in the office. Which of the following should a network technician do FIRST?

- A. Check the system's IP address
- B. Do a ping test against the servers
- C. Reseat the cables into the back of the PC
- D. Ask what changes were made

Answer: D

Explanation:

When a user reports being unable to access network resources after making some changes, the network technician should first ask the user what changes were made. This information can help the technician identify the cause of the issue and determine the appropriate course of action.

References: CompTIA Network+ Certification Study Guide, Sixth Edition by Glen E. Clarke

NEW QUESTION 73

- (Topic 1)

Which of the following is used to prioritize Internet usage per application and per user on the network?

- A. Bandwidth management
- B. Load balance routing
- C. Border Gateway Protocol
- D. Administrative distance

Answer: A

Explanation:

Bandwidth management is used to prioritize Internet usage per application and per user on the network. This allows an organization to allocate network resources to mission-critical applications and users, while limiting the bandwidth available to non- business-critical applications. References: Network+ Certification Study Guide, Chapter 2: Network Operations

NEW QUESTION 77

- (Topic 1)

Which of the following would MOST likely be used to review previous upgrades to a system?

- A. Business continuity plan
- B. Change management
- C. System life cycle
- D. Standard operating procedures

Answer: B

Explanation:

Change management is the process of reviewing previous upgrades to a system. It is a systematic approach to managing changes to an organization's IT systems and infrastructure. Change management involves the assessment of potential risks associated with a change, as well as the identification of any necessary resources required to implement the change. References: Network+ Certification Study Guide, Chapter 8: Network Troubleshooting

NEW QUESTION 82

- (Topic 1)

Access to a datacenter should be individually recorded by a card reader even when multiple employees enter the facility at the same time. Which of the following allows the enforcement of this policy?

- A. Motion detection
- B. Access control vestibules
- C. Smart lockers
- D. Cameras

Answer: B

Explanation:

The most effective security mechanism against physical intrusions due to stolen credentials would likely be a combination of several of these options. However, of the options provided, the most effective security mechanism would probably be an access control vestibule. An access control vestibule is a secure area that is located between the outer perimeter of a facility and the inner secure area. It is designed to provide an additional layer of security by requiring that individuals pass through a series of security checks before being allowed access to the secure area. This could include biometric authentication, access card readers, and motion detection cameras.

Access control vestibules allow the enforcement of the policy that access to a datacenter should be individually recorded by a card reader even when multiple employees enter the facility at the same time. An access control vestibule is a physical security device that consists of two doors with an interlocking mechanism. Only one door can be opened at a time, and only one person can pass through each door. This prevents tailgating or piggybacking, where unauthorized persons follow authorized persons into a secure area. An access control vestibule can also be integrated with a card reader or other authentication system to record each individual's access. References: <https://www.boonedam.us/blog/what-are-access-control-vestibules>

NEW QUESTION 86

- (Topic 1)

A technician is installing a high-density wireless network and wants to use an available frequency that supports the maximum number of channels to reduce interference. Which of the following standard 802.11 frequency ranges should the technician look for while reviewing WAP specifications?

- A. 2.4GHz
- B. 5GHz
- C. 6GHz
- D. 900MHz

Answer: B

Explanation:

802.11a/b/g/n/ac wireless networks operate in two frequency ranges: 2.4 GHz and 5 GHz. The 5 GHz frequency range supports more channels than the 2.4 GHz frequency range, making it a better choice for high-density wireless networks.

References: CompTIA Network+ Certification Study Guide, Sixth Edition by Glen E. Clarke

NEW QUESTION 88

- (Topic 1)

Wireless users are reporting intermittent internet connectivity. Connectivity is restored when the users disconnect and reconnect, utilizing the web authentication process each time. The network administrator can see the devices connected to the APs at all times. Which of the following steps will MOST likely determine the cause of the issue?

- A. Verify the session time-out configuration on the captive portal settings
- B. Check for encryption protocol mismatch on the client's wireless settings
- C. Confirm that a valid passphrase is being used during the web authentication
- D. Investigate for a client's disassociation caused by an evil twin AP

Answer: A

Explanation:

A captive portal is a web page that requires users to authenticate before they can access the internet. If the session time-out configuration is too short, users may experience intermittent internet connectivity and have to reconnect using the web authentication process each time. The network administrator can verify the session time-out configuration on the captive portal settings and adjust it if needed. References: CompTIA Network+ Certification Exam Objectives Version 2.0 (Exam Number: N10-006), Domain 1.0 Network Architecture, Objective 1.8 Explain the purposes and use cases for advanced networking devices.

NEW QUESTION 93

SIMULATION - (Topic 1)

SIMULATION

You have been tasked with setting up a wireless network in an office. The network will consist of 3 Access Points and a single switch. The network must meet the


following parameters:

The SSIDs need to be configured as CorpNet with a key of S3cr3t! The wireless signals should not interfere with each other

The subnet the Access Points and switch are on should only support 30 devices maximum The Access Points should be configured to only support TKIP clients at a maximum speed INSTRUCTIONS

Click on the wireless devices and review their information and adjust the settings of the access points to meet the given requirements.

If at any time you would like to bring back the initial state of the simulation, please click the Reset All button.

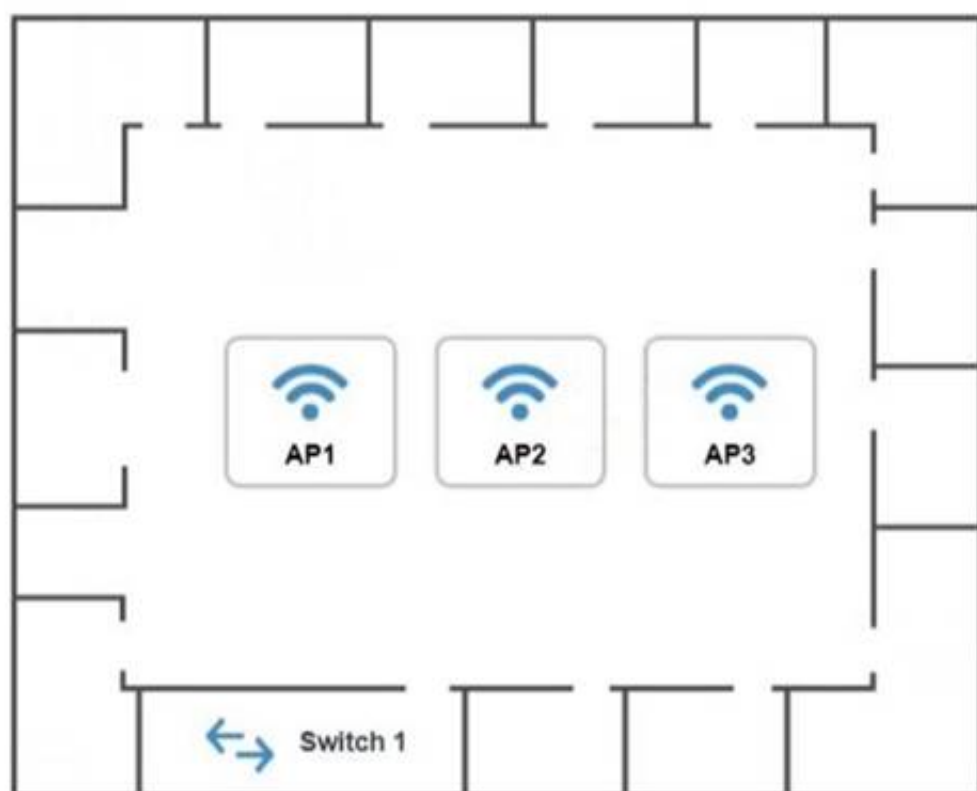

AP1 Configuration

https://ap1.setup.do

Basic Configuration

Access Point Name

AP1

IP Address

Gateway

192.168.1.1

SSID

SSID Broadcast

☒ Yes
 ☐ No

Wireless

Mode

B

G

Channel

Wired

Speed

☐ Auto
 ☒ 100
 ☐ 1000

Duplex

☐ Auto
 ☐ Half
 ☒ Full

Security Configuration

Security Settings

☒ None
 ☐ WEP
 ☐ WPA
 ☐ WPA2
 ☐ WPA2 - Enterprise

Key or Passphrase

Reset to Default

Save

Close

AP2 Configuration

https://ap2.setup.do

Basic Configuration

Access Point Name

IP Address /

Gateway

SSID

SSID Broadcast ☒ Yes ☐ No

Wireless

Mode

Channel
2
3
4
5
6
7
8
9
10
11

Wired

Speed ☐ Auto ☒ 100 ☐ 1000

Duplex ☐ Auto ☐ Half ☒ Full

Security Configuration

Security Settings ☒ None ☐ WEP ☐ WPA ☐ WPA2 ☐ WPA2 - Enterprise

Key or Passphrase

Reset to Default
Save
Close

AP3 Configuration

https://ap3.setup.do

Basic Configuration

Access Point Name

AP3

IP Address

/

Gateway

192.168.1.1

SSID

SSID Broadcast

☒ Yes
 ☐ No

Wireless

Mode

B

G

Channel

1

2

3

4

5

6

7

8

9

10

11

Wired

Speed

☐ Auto
 ☒ 100
 ☐ 1000

Duplex

☐ Auto
 ☐ Half
 ☒ Full

Security Configuration

Security Settings

☒ None
 ☐ WEP
 ☐ WPA
 ☐ WPA2
 ☐ WPA2 - Enterprise

Key or Passphrase

Reset to Default

Save

Close

- A. Mastered
 B. Not Mastered

Answer: A

Explanation:

On the first exhibit, the layout should be as follows

AP1 Configuration

https://ap1.setup.do

Basic Configuration

Access Point Name

AP1

IP Address

192.168.1.32

/

Gateway

192.168.1.1

SSID

CorpNet

SSID Broadcast

Yes

No

Wireless

Mode

B

Channel

3

Wired

Speed

Auto

100

1000

Duplex

Auto

Half

Full

Security Configuration

Security Settings

None

WEP

WPA

WPA2

WPA2 - Enterprise

Key or Passphrase

S3cr3t!

Graphical user interface, text, application, chat or text message Description automatically generated
Description automatically generated

AP1 Configuration

https://ap1.setup.do

IP Address

192.168.1.32

/

27

Gateway

192.168.1.1

SSID

CorpNet

SSID Broadcast

Yes

No

Wireless

Mode

B

Channel

3

Wired

Speed

Auto

100

1000

Duplex

Auto

Half

Full

Security Configuration

Security Settings

None

WEP

WPA

WPA2

WPA2 - Enterprise

Graphical user interface
Description automatically generated

Security Configuration

Security Settings

None

WEP

WPA

WPA2

WPA2 - Enterprise

Key or Passphrase

S3cr3t!

Graphical user interface, text, application, chat or text message
Description automatically generated

AP1 Configuration

←

→

↺

https://ap1.setup.do

IP Address

192.168.1.3

/

27

Gateway

192.168.1.1

SSID

CorpNet

SSID Broadcast

☒ Yes ☐ No

Wireless

Mode

G

▼

Channel

3

▼

Wired

Speed

☒ Auto ☐ 100 ☐ 1000

Duplex

☒ Auto ☐ Half ☐ Full

Security Configuration

Security Settings

☐ None ☐ WEP ☒ WPA ☐ WPA2 ☐ WPA2 - Enterprise

Key or Passphrase

S3cr3t!

Reset to Default

Save

Close

Graphical user interface
Description automatically generated
Exhibit 2 as follows
Access Point Name AP2

AP2 Configuration

←

→

↺

https://ap2.setup.do

Basic Configuration

Access Point Name

AP2

IP Address

192.168.1.64

/

27

Gateway

192.168.1.1

SSID

CorpNet

SSID Broadcast

☒ Yes ☐ No

Wireless

Mode

B

▼

Channel

6

▼

Wired

Speed

☐ Auto ☒ 100 ☐ 1000

Duplex

☐ Auto ☐ Half ☒ Full

Security Configuration

Reset to Default

Save

Close

Graphical user interface
Description automatically generated

Security Configuration

Security Settings

☐ None ☐ WEP ☐ WPA ☐ WPA2 ☒ WPA2 - Enterprise

Key or Passphrase

S3cr3t!

Graphical user interface, text, application, chat or text message
Description automatically generated

AP2 Configuration

←

→

↺

https://ap2.setup.do

IP Address

192.168.1.4 / 27

Gateway

192.168.1.1

SSID

CorpNet

SSID Broadcast

☒ Yes ☐ No

Wireless

Mode

G

Channel

6

Wired

Speed

☒ Auto ☐ 100 ☐ 1000

Duplex

☒ Auto ☐ Half ☐ Full

Security Configuration

Security Settings

☐ None ☐ WEP ☒ WPA ☐ WPA2 ☐ WPA2 - Enterprise

Key or Passphrase

S3cr3t!

Reset to Default

Save

Close

Graphical user interface
Description automatically generated
Exhibit 3 as follows
Access Point Name AP3

Passing Certification Exams Made Easy

visit - <https://www.2PassEasy.com>

AP3 Configuration

https://ap3.setup.do

Basic Configuration

Access Point Name

AP3

IP Address

192.168.1.96

/

27

Gateway

192.168.1.1

SSID

CorpNet

SSID Broadcast

Yes

No

Wireless

Mode

B

Channel

9

Wired

Speed

Auto

100

1000

Duplex

Auto

Half

Full

Security Configuration

Reset to Default

Save

Close

Graphical user interface
Description automatically generated

Security Configuration

Security Settings

None

WEP

WPA

WPA2

WPA2 - Enterprise

Key or Passphrase

S3cr3t!

Graphical user interface, text, application, chat or text message
Description automatically generated

AP3 Configuration

https://ap3.setup.do

IP Address

192.168.1.5

/

27

Gateway

192.168.1.1

SSID

CorpNet

SSID Broadcast

Yes

No

Wireless

Mode

G

Channel

9

Wired

Speed

Auto

100

1000

Duplex

Auto

Half

Full

Security Configuration

Security Settings

None

WEP

WPA

WPA2

WPA2 - Enterprise

Key or Passphrase

S3cr3t!

Reset to Default

Save

Close

Graphical user interface
Description automatically generated

NEW QUESTION 98

- (Topic 1)

A network administrator is configuring a load balancer for two systems. Which of the following must the administrator configure to ensure connectivity during a failover?

- A. VIP
- B. NAT
- C. APIPA
- D. IPv6 tunneling
- E. Broadcast IP

Answer: A

Explanation:

A virtual IP (VIP) address must be configured to ensure connectivity during a failover. A VIP address is a single IP address that is assigned to a group of servers or network devices. When one device fails, traffic is automatically rerouted to the remaining devices, and the VIP address is reassigned to the backup device, allowing clients to continue to access the service without interruption.

References:

? CompTIA Network+ Certification Study Guide, Exam N10-007, Fourth Edition, Chapter 6: Network Servers, p. 300

NEW QUESTION 100

- (Topic 1)

A technician wants to deploy a new wireless network that comprises 30 WAPs installed throughout a three-story office building. All the APs will broadcast the same SSID for client access. Which of the following BEST describes this deployment?

- A. Extended service set
- B. Basic service set
- C. Unified service set
- D. Independent basic service set

Answer: A

Explanation:

An extended service set (ESS) is a wireless network that consists of multiple access points (APs) that share the same SSID and are connected by a wired network. An ESS allows wireless clients to roam seamlessly between different APs without losing connectivity. A basic service set (BSS) is a wireless network that consists of a single AP and its associated clients. An independent basic service set (IBSS) is a wireless network that consists of a group of clients that communicate directly without an AP. A unified service set is not a standard term for a wireless network. References: [https://partners.comptia.org/docs/default-source/resources/comptia-network-n10-008-exam-objectives-\(2-0\)](https://partners.comptia.org/docs/default-source/resources/comptia-network-n10-008-exam-objectives-(2-0)), [https://en.wikipedia.org/wiki/Service_set_\(802.11_network\)](https://en.wikipedia.org/wiki/Service_set_(802.11_network))

NEW QUESTION 103

- (Topic 2)

A business is using the local cable company to provide Internet access. Which of the following types of cabling will the cable company MOST likely use from the demarcation point back to the central office?

- A. Multimode
- B. Cat 5e
- C. RG-6
- D. Cat 6
- E. 100BASE-T

Answer: C

Explanation:

RG-6 is a type of coaxial cable that is commonly used by cable companies to provide Internet access from the demarcation point back to the central office. It has a thicker conductor and better shielding than RG-59, which is another type of coaxial cable. Multimode and Cat 5e are types of fiber optic and twisted pair cables respectively, which are not typically used by cable companies. Cat 6 and 100BASE-T are standards for twisted pair cables, not types of cabling.

NEW QUESTION 106

- (Topic 2)

A network administrator is setting up several IoT devices on a new VLAN and wants to accomplish the following

- * 1. Reduce manual configuration on each system
- * 2. Assign a specific IP address to each system
- * 3. Allow devices to move to different switchports on the same VLAN

Which of the following should the network administrator do to accomplish these requirements?

- A. Set up a reservation for each device
- B. Configure a static IP on each device
- C. Implement private VLANs for each device
- D. Use DHCP exclusions to address each device

Answer: A

Explanation:

A reservation is a feature of DHCP that assigns a specific IP address to a device based on its MAC address. This way, the device will always receive the same IP address from the DHCP server, regardless of its location or connection time. A network administrator can set up a reservation for each IoT device to accomplish the requirements of reducing manual configuration, assigning a specific IP address, and allowing devices to move to different switchports on the same VLAN.

References: <https://www.comptia.org/blog/what-is-dhcp>

NEW QUESTION 110

- (Topic 2)

Which of the following services can provide data storage, hardware options, and scalability to a third-party company that cannot afford new devices?

- A. SaaS
- B. IaaS
- C. PaaS
- D. DaaS

Answer: B

Explanation:

IaaS stands for Infrastructure as a Service, which is a cloud computing model that provides virtualized computing resources such as servers, storage, and networking over the Internet. IaaS can provide data storage, hardware options, and scalability to a third-party company that cannot afford new devices by allowing them to rent or lease the infrastructure they need from a cloud provider. The company can pay only for what they use and scale up or down as needed.

References: <https://www.comptia.org/blog/what-is-iaas>

NEW QUESTION 111

- (Topic 2)

A company that uses VoIP telephones is experiencing intermittent issues with one-way audio and dropped conversations. The manufacturer says the system will work if ping times are less than 50ms. The company has recorded the following ping times:

10ms	10ms	10ms	100ms	70ms	5ms	5ms	80ms	100ms	5ms	5ms
------	------	------	-------	------	-----	-----	------	-------	-----	-----

Which of the following is MOST likely causing the issue?

- A. Attenuation
- B. Latency
- C. VLAN mismatch
- D. Jitter

Answer: D

Explanation:

Jitter is most likely causing the issue of intermittent one-way audio and dropped conversations for the company that uses VoIP telephones. Jitter is a variation in delay of packets arriving at the destination. It can cause choppy or distorted audio quality for VoIP applications, especially over WAN links that have limited bandwidth and high latency. The recommended jitter for VoIP is less than 10ms. The company has recorded ping times that exceed 50ms, which indicates high jitter and latency on their network. References: <https://www.voip-info.org/voip-jitter/> 1

NEW QUESTION 114

- (Topic 2)

A network technician is reviewing an upcoming project's requirements to implement IaaS. Which of the following should the technician consider?

- A. Software installation processes
- B. Type of database to be installed
- C. Operating system maintenance
- D. Server hardware requirements

Answer: D

Explanation:

IaaS stands for Infrastructure as a Service, which is a cloud computing model that provides virtualized computing resources such as servers, storage, and networking over the Internet. When implementing IaaS, the network technician should consider the server hardware requirements, such as CPU, RAM, disk space, and network bandwidth, that are needed to run the applications and services on the cloud. The other options are not relevant to IaaS, as they are either handled by the cloud provider or by the end-user. References: <https://www.comptia.org/blog/what-is-iaas>

NEW QUESTION 118

- (Topic 2)

Which of the following is used to provide networking capability for VMs at Layer 2 of the OSI model?

- A. VPN
- B. VRRP
- C. vSwitch
- D. VIP

Answer: C

Explanation:

A vSwitch (virtual switch) is a software-based switch that provides networking capability for VMs (virtual machines) at Layer 2 of the OSI model. It connects the VMs to each other or to external networks using virtual NICs (network interface cards). A VPN (virtual private network) is a technology that creates a secure tunnel over a public network for remote access or site-to-site connectivity. VRRP (Virtual Router Redundancy Protocol) is a protocol that provides high availability for routers by creating a virtual router with multiple physical routers. A VIP (virtual IP) is an IP address that can be shared by multiple servers or devices for load balancing or failover purposes.

NEW QUESTION 122

- (Topic 2)

A technician is deploying a low-density wireless network and is contending with multiple types of building materials. Which of the following wireless frequencies would allow for the LEAST signal attenuation?

- A. 2.4GHz

- B. 5GHz
- C. 850MHz
- D. 900MHZ

Answer: A

Explanation:

2.4GHz is the wireless frequency that would allow for the least signal attenuation when deploying a low-density wireless network with multiple types of building materials. Signal attenuation is the loss of signal strength or quality as it travels through a medium or over a distance. Signal attenuation can be affected by various factors such as distance, interference, reflection, refraction, diffraction, scattering, or absorption. Generally, lower frequencies have less signal attenuation than higher frequencies because they can penetrate obstacles better and travel farther. Therefore, 2.4GHz would have less signal attenuation than 5GHz, 850MHz, or 900MHz. References: <https://www.cisco.com/c/en/us/support/docs/wireless-mobility/wireless-lan-wlan/82068-omni-vs-direct.html>

NEW QUESTION 127

- (Topic 2)

Which of the following attacks encrypts user data and requires a proper backup implementation to recover?

- A. DDoS
- B. Phishing
- C. Ransomware
- D. MAC spoofing

Answer: C

Explanation:

Ransomware is a type of malware that encrypts user data and demands a ransom for its decryption. Ransomware can prevent users from accessing their files and applications, and cause data loss or corruption. A proper backup implementation is essential to recover from a ransomware attack, as it can help restore the encrypted data without paying the ransom or relying on the attackers' decryption key. References: <https://www.comptia.org/blog/what-is-ransomware>

NEW QUESTION 129

- (Topic 2)

A firewall administrator is implementing a rule that directs HTTP traffic to an internal server listening on a non-standard socket Which of the following types of rules is the administrator implementing?

- A. NAT
- B. PAT
- C. STP
- D. SNAT
- E. ARP

Answer: B

Explanation:

The firewall administrator is implementing a PAT (Port Address Translation) rule that directs HTTP traffic to an internal server listening on a non-standard socket. PAT is a type of NAT (Network Address Translation) that allows multiple devices to share a single public IP address by using different port numbers. PAT can also be used to redirect traffic from one port to another port on the same or different IP address. This can be useful for security or load balancing purposes. For example, a firewall administrator can configure a PAT rule that redirects HTTP traffic (port 80) from the public IP address of the firewall to an internal server that listens on a non-standard port (such as 8080) on its private IP address. References: <https://www.cisco.com/c/en/us/support/docs/ip/network-address-translation-nat/13772-12.html>

NEW QUESTION 130

- (Topic 2)

Which of the following protocol types describes secure communication on port 443?

- A. ICMP
- B. UDP
- C. TCP
- D. IP

Answer: C

Explanation:

TCP is the protocol type that describes secure communication on port 443. TCP (Transmission Control Protocol) is a connection-oriented protocol that provides reliable and ordered delivery of data packets over an IP network. TCP uses port numbers to identify different applications or services on a device. Port 443 is the default port for HTTPS (Hypertext Transfer Protocol Secure), which is an extension of HTTP that uses SSL (Secure Sockets Layer) or TLS (Transport Layer Security) encryption to protect data in transit between a web server and a web browser. References: <https://www.cisco.com/c/en/us/support/docs/ip/routing-information-protocol-rip/13788-3.html>

NEW QUESTION 134

- (Topic 2)

There are two managed legacy switches running that cannot be replaced or upgraded. These switches do not support cryptographic functions, but they are password protected. Which of the following should a network administrator configure to BEST prevent unauthorized access?

- A. Enable a management access list
- B. Disable access to unnecessary services.
- C. Configure a stronger password for access
- D. Disable access to remote management
- E. Use an out-of-band access method.

Answer: E

Explanation:

Using an out-of-band access method is the best way to prevent unauthorized access to the legacy switches that do not support cryptographic functions. Out-of-band access is a method of accessing a network device through a dedicated channel that is separate from the main network traffic. Out-of-band access can use physical connections such as serial console ports or dial-up modems, or logical connections such as VPNs or firewalls. Out-of-band access provides more security and reliability than in-band access, which uses the same network as the data traffic and may be vulnerable to attacks or failures. References: <https://www.cisco.com/c/en/us/td/docs/ios-xml/ios/fundamentals/configuration/15mt/fundamentals-15-mt-book/cf-out-band-mgmt.html>

NEW QUESTION 135

- (Topic 2)

The following instructions were published about the proper network configuration for a videoconferencing device:

"Configure a valid static RFC1918 address for your network. Check the option to use a connection over NAT."

Which of the following is a valid IP address configuration for the device?

- A. FE80::1
- B. 100.64.0.1
- C. 169.254.1.2
- D. 172.19.0.2
- E. 224.0.0.12

Answer: D

Explanation:

172.19.0.2 is a valid IP address configuration for the device that uses a static RFC1918 address for the network and allows for a connection over NAT (Network Address Translation). RFC1918 addresses are private IP addresses that are not routable on the public Internet and are used for internal networks. The RFC1918 address ranges are 10.0.0.0/8, 172.16.0.0/12, and 192.168.0.0/16. NAT is a technique that translates private IP addresses to public IP addresses when communicating with external networks, such as the Internet. FE80::1 is an IPv6 link-local address that is not a static RFC1918 address and does not allow for a connection over NAT. 100.64.0.1 is an IPv4 address that belongs to the shared address space range (100.64.0.0/10) that is used for carrier-grade NAT (CGN) between service providers and subscribers, which is not a static RFC1918 address and does not allow for a connection over NAT. 169.254.1.2 is an IPv4 link-local address that is automatically assigned by a device when it cannot obtain an IP address from a DHCP server or manual configuration, which is not a static RFC1918 address and does not allow for a connection over NAT. 224.0.0.12 is an IPv4 multicast address that is used for VRRP (Virtual Router Redundancy Protocol), which is not a static RFC1918 address and does not allow for a connection over NAT.

NEW QUESTION 139

- (Topic 2)

An IT technician suspects a break in one of the uplinks that provides connectivity to the core switch. Which of the following command-line tools should the technician use to determine where the incident is occurring?

- A. nslookup
- B. show config
- C. netstat
- D. show interface
- E. show counters

Answer: D

Explanation:

show interface is a command-line tool that displays information about the status, configuration, and statistics of an interface on a network device. A technician can use show interface to determine where the incident is occurring in a network by checking the uplink status, speed, duplex mode, errors, collisions, and other parameters of each interface. References: <https://www.comptia.org/blog/what-is-show-interface>

NEW QUESTION 143

- (Topic 2)

A company is being acquired by a large corporation. As part of the acquisition process, the

company's address should now redirect clients to the corporate organization page. Which of the following DNS records needs to be created?

- A. SOA
- B. NS
- C. CNAME
- D. TXT

Answer: C

Explanation:

Reference: <https://www.namecheap.com/support/knowledgebase/article.aspx/9604/2237/types-of-domain-redirects-301-302-url-redirects-url-frame-and-cname/#:~:text=CNAME%20record%20is%20actually%20not,often%20mistakenly%20used%20as%20such.&text=In%20other%20words%2C%20CNAME%20record,address%20of%20the%20destination%20hostname> CNAME (Canonical Name) is a type of DNS record that maps an alias name to another name, which can be either another alias or the canonical name of a host or domain. A CNAME record can be used to redirect clients from one domain name to another domain name, such as from the company's address to the corporate organization page. SOA (Start of Authority) is a type of DNS record that specifies authoritative information about a DNS zone, such as the primary name server, contact email address, serial number, refresh interval, etc., which does not redirect clients to another domain name. NS (Name Server) is a type of DNS record that specifies which name server is authoritative for a domain or subdomain, which does not redirect clients to another domain name. TXT (Text) is a type of DNS record that provides arbitrary text information about a domain or subdomain, such as SPF (Sender Policy Framework) records or DKIM (DomainKeys Identified Mail) records, which does not redirect clients to another domain name.

NEW QUESTION 147

- (Topic 2)

A user reports a weak signal when walking 20ft (61 m) away from the WAP in one direction, but a strong signal when walking 20ft in the opposite direction The technician has reviewed the configuration and confirmed the channel type is correct There is no jitter or latency on the connection Which of the following would be

the MOST likely cause of the issue?

- A. Antenna type
- B. Power levels
- C. Frequency
- D. Encryption type

Answer: A

Explanation:

The antenna type affects the signal strength and coverage of a WAP. Different types of antennas have different radiation patterns and gain, which determine how far and wide the signal can reach. If the user experiences a weak signal in one direction but a strong signal in the opposite direction, it could mean that the antenna type is not suitable for the desired coverage area. The technician should consider changing the antenna type to one that has a more balanced or directional radiation pattern. References: <https://community.cisco.com/t5/wireless-small-business/wap200-poor-signal-strength/td-p/1565796>

NEW QUESTION 152

- (Topic 2)

A network technician is investigating an issue with handheld devices in a warehouse. Devices have not been connecting to the nearest APs, but they have been connecting to an AP on the far side of the warehouse. Which of the following is the MOST likely cause of this issue?

- A. The nearest APs are configured for 802.11g.
- B. An incorrect channel assignment is on the nearest APs.
- C. The power level is too high for the AP on the far side.
- D. Interference exists around the AP on the far side.

Answer: C

Explanation:

The power level is a setting that determines how strong the wireless signal is from an access point (AP). If the power level is too high for an AP on the far side of a warehouse, it can cause interference and overlap with other APs on the same channel or frequency. This can result in handheld devices not connecting to the nearest APs, but connecting to the AP on the far side instead. A technician should adjust the power level of the AP on the far side to reduce interference and improve connectivity. References:

<https://www.comptia.org/blog/what-is-power-level>

NEW QUESTION 155

- (Topic 2)

A company wants to implement a large number of WAPs throughout its building and allow users to be able to move around the building without dropping their connections Which of the following pieces of equipment would be able to handle this requirement?

- A. A VPN concentrator
- B. A load balancer
- C. A wireless controller
- D. A RADIUS server

Answer: C

Explanation:

A wireless controller would be able to handle the requirement of implementing a large number of WAPs throughout the building and allowing users to move around without dropping their connections. A wireless controller is a device that centrally manages and configures multiple wireless access points (WAPs) on a network. It can provide features such as load balancing, roaming, security, QoS, and monitoring for the wireless network. A wireless controller can also support wireless mesh networks, where some WAPs act as relays for other WAPs to extend the wireless coverage. References:

<https://www.cisco.com/c/en/us/products/wireless/wireless-lan-controller/index.html>

NEW QUESTION 160

- (Topic 2)

A network administrator is downloading a large patch that will be uploaded to several enterprise switches simultaneously during the day's upgrade cycle. Which of the following should the administrator do to help ensure the upgrade process will be less likely to cause problems with the switches?

- A. Confirm the patch's MD5 hash prior to the upgrade
- B. Schedule the switches to reboot after an appropriate amount of time.
- C. Download each switch's current configuration before the upgrade
- D. Utilize FTP rather than TFTP to upload the patch

Answer: A

Explanation:

The network administrator should confirm the patch's MD5 hash prior to the upgrade to help ensure the upgrade process will be less likely to cause problems with the switches. MD5 (Message Digest 5) is a cryptographic hash function that produces a 128-bit hash value for any given input. It can be used to verify the integrity and authenticity of a file by comparing its hash value with a known or expected value. If the hash values match, it means that the file has not been corrupted or tampered with during transmission or storage. If the hash values do not match, it means that the file may be damaged or malicious and should not be used for the upgrade. References: <https://www.cisco.com/c/en/us/support/docs/security-vpn/secure-shell-ssh/15292-scp.html>

NEW QUESTION 163

- (Topic 2)

A user is having difficulty with video conferencing and is looking for assistance. Which of the following would BEST improve performance?

- A. Packet shaping
- B. Quality of service
- C. Port mirroring

D. Load balancing

Answer: B

Explanation:

Quality of service (QoS) is a mechanism that prioritizes network traffic based on different criteria, such as application type, source and destination address, port number, etc., and allocates bandwidth and resources accordingly. QoS would best improve performance for video conferencing, as it would ensure that video traffic gets higher priority and lower latency than other types of traffic on the network. Packet shaping is a technique that controls the rate or volume of network traffic by delaying or dropping packets that exceed certain thresholds or violate certain policies, which may not improve performance for video conferencing if it causes packet loss or jitter. Port mirroring is a technique that copies traffic from one port to another port on a switch for monitoring or analysis purposes, which does not improve performance for video conferencing at all. Load balancing is a technique that distributes network traffic across multiple servers or devices for improved availability and scalability, which does not

NEW QUESTION 167

- (Topic 2)

A client moving into a new office wants the IP network set up to accommodate 412 network-connected devices that are all on the same subnet. The subnet needs to be as small as possible. Which of the following subnet masks should be used to achieve the required result?

- A. 255.255.0.0
- B. 255.255.252.0
- C. 255.255.254.0
- D. 255.255.255.0

Answer: B

Explanation:

255.255.252.0 is a subnet mask that allows for 1022 network-connected devices on the same subnet, which is the smallest subnet that can accommodate 412 devices. The subnet mask determines how many bits are used for the network portion and how many bits are used for the host portion of an IP address. A smaller subnet mask means more bits are used for the network portion and less bits are used for the host portion, which reduces the number of available hosts on the subnet. 255.255.0.0 allows for 65534 hosts on the same subnet, which is too large. 255.255.254.0 allows for 510 hosts on the same subnet, which is also too large. 255.255.255.0 allows for 254 hosts on the same subnet, which is too small.

NEW QUESTION 169

- (Topic 2)

A Chief Information Officer (CIO) wants to improve the availability of a company's SQL database. Which of the following technologies should be utilized to achieve maximum availability?

- A. Clustering
- B. Port aggregation
- C. NIC teaming
- D. Snapshots

Answer: A

Explanation:

Clustering is a technique that involves grouping multiple servers or instances together to provide high availability and fault tolerance for a database. Clustering can help improve the availability of a SQL database by allowing automatic failover and load balancing between the cluster nodes. If one node fails or becomes overloaded, another node can take over the database operations without disrupting the service. References: <https://www.educba.com/sql-cluster/>

NEW QUESTION 174

- (Topic 2)

A network administrator decided to use SLAAC in an extensive IPv6 deployment to alleviate IP address management. The devices were properly connected into the LAN but autoconfiguration of the IP address did not occur as expected. Which of the following should the network administrator verify?

- A. The network gateway is configured to send router advertisements.
- B. A DHCP server is present on the same broadcast domain as the clients.
- C. The devices support dual stack on the network layer.
- D. The local gateway supports anycast routing.

Answer: A

Explanation:

SLAAC (Stateless Address Autoconfiguration) is a method for IPv6 devices to automatically configure their IP addresses based on the network prefix advertised by a router. The router sends periodic router advertisements (RAs) that contain the network prefix and other parameters for the devices to use. If the network gateway is not configured to send RAs, then SLAAC will not work. A DHCP server is not needed for SLAAC, as the devices generate their own addresses without relying on a server. Dual stack and anycast routing are not related to SLAAC.

NEW QUESTION 175

- (Topic 2)

A network field technician is installing and configuring a secure wireless network. The technician performs a site survey. Which of the following documents would MOST likely be created as a result of the site survey?

- A. Physical diagram
- B. Heat map
- C. Asset list
- D. Device map

Answer: B

Explanation:

A heat map would most likely be created as a result of the site survey. A heat map is a graphical representation of the wireless signal strength and coverage in a given area. It can show the location of APs, antennas, walls, obstacles, interference sources, and dead zones. It can help with planning, optimizing, and troubleshooting wireless networks. References: <https://www.netspotapp.com/what-is-a-wifi-heatmap.html>

NEW QUESTION 179

- (Topic 2)

A network technician is configuring a new firewall for a company with the necessary access requirements to be allowed through the firewall. Which of the following would normally be applied as the LAST rule in the firewall?

- A. Secure SNMP
- B. Port security
- C. Implicit deny
- D. DHCP snooping

Answer: C

Explanation:

Implicit deny is a firewall rule that blocks all traffic that is not explicitly allowed by other rules. Implicit deny is usually applied as the last rule in the firewall to ensure that only the necessary access requirements are allowed through the firewall and that any unwanted or malicious traffic is rejected. Implicit deny can also provide a default security policy and a baseline for auditing and logging purposes.

Secure SNMP is a protocol that allows network devices to send event messages to a centralized server or console for logging and analysis. Secure SNMP can be used to monitor and manage the status, performance, and configuration of network devices. Secure SNMP can also help to detect and respond to potential problems or faults on the network. However, secure SNMP is not a firewall rule; it is a network management protocol.

Port security is a feature that allows a switch to restrict the devices that can connect to a specific port based on their MAC addresses. Port security can help to prevent unauthorized access, spoofing, or MAC flooding attacks on the switch. However, port security is not a firewall rule; it is a switch feature.

DHCP snooping is a feature that allows a switch to filter DHCP messages and prevent rogue DHCP servers from assigning IP addresses to devices on the network. DHCP snooping can help to prevent IP address conflicts, spoofing, or denial-of-service attacks on the network. However, DHCP snooping is not a firewall rule; it is a switch feature.

NEW QUESTION 180

- (Topic 2)

A network technician is investigating an IP phone that does not register in the VoIP system Although it received an IP address, it did not receive the necessary DHCP options The information that is needed for the registration is distributes by the OHCP scope All other IP phones are working properly. Which of the following does the technician need to verify?

- A. VLAN mismatch
- B. Transceiver mismatch
- C. Latency
- D. DHCP exhaustion

Answer: A

Explanation:

A VLAN mismatch is the most likely reason why an IP phone does not receive the necessary DHCP options for registration. A VLAN mismatch occurs when a device is connected to a switch port that belongs to a different VLAN than the device's intended VLAN. This can cause communication problems or prevent access to network resources. For example, if an IP phone is connected to a switch port that belongs to the data VLAN instead of the voice VLAN, it may not receive the DHCP options that contain information such as the TFTP server address, the NTP server address, or the default gateway address for the voice VLAN. These DHCP options are essential for the IP phone to register with the VoIP system and function properly. References:

<https://www.cisco.com/c/en/us/support/docs/voice-unified-communications/unified-communications-manager-callmanager/13979-dhcp-option-150-00.html>

NEW QUESTION 182

- (Topic 2)

Which of the following protocols will a security appliance that is correlating network events from multiple devices MOST likely rely on to receive event messages?

- A. Syslog
- B. Session Initiation Protocol
- C. Secure File Transfer Protocol
- D. Server Message Block

Answer: A

Explanation:

Syslog is a protocol that provides a standard way for network devices and applications to send event messages to a logging server or a security appliance. Syslog messages can contain information about security incidents, errors, warnings, system status, configuration changes, and other events. A security appliance that is correlating network events from multiple devices can rely on Syslog to receive event messages from different sources and formats. References:

<https://www.comptia.org/blog/what-is-syslog>

NEW QUESTION 183

- (Topic 2)

A network technician is observing the behavior of an unmanaged switch when a new device is added to the network and transmits data. Which of the following BEST describes how the switch processes this information?

- A. The data is flooded out of every por
- B. including the one on which it came in.
- C. The data is flooded out of every port but only in the VLAN where it is located.
- D. The data is flooded out of every port, except the one on which it came in
- E. The data is flooded out of every port, excluding the VLAN where it is located

Answer: C

Explanation:

The switch processes the data by flooding it out of every port, except the one on which it came in. Flooding is a process where a switch sends a data frame to all ports except the source port when it does not have an entry for the destination MAC address in its MAC address table. Flooding allows the switch to learn the MAC addresses of the devices connected to its ports and update its MAC address table accordingly. Flooding also ensures that the data frame reaches its intended destination, even if the switch does not know its location. References: <https://www.cisco.com/c/en/us/support/docs/lan-switching/spanning-tree-protocol/10556-16.html>

NEW QUESTION 184

- (Topic 2)

Which of the following OSI model layers is where conversations between applications are established, coordinated, and terminated?

- A. Session
- B. Physical
- C. Presentation
- D. Data link

Answer: A

Explanation:

Reference: <https://www.techtarget.com/searchnetworking/definition/OSI#:~:text=The%20session%20layer,and%20terminates%20conversations%20between%20applications.>

The session layer is where conversations between applications are established, coordinated, and terminated. It is responsible for creating, maintaining, and ending sessions between different devices or processes. The physical layer deals with the transmission of bits over a medium. The presentation layer formats and translates data for different applications. The data link layer provides reliable and error-free delivery of frames within a network.

NEW QUESTION 187

- (Topic 2)

A technician is connecting DSL for a new customer. After installing and connecting the on-premises equipment, the technician verifies DSL synchronization. When connecting to a workstation, however, the link LEDs on the workstation and modem do not light up. Which of the following should the technician perform during troubleshooting?

- A. Identify the switching loops between the modem and the workstation.
- B. Check for asymmetrical routing on the modem.
- C. Look for a rogue DHCP server on the network.
- D. Replace the cable connecting the modem and the workstation.

Answer: D

Explanation:

If the link LEDs on the workstation and modem do not light up when connecting to a workstation, it could indicate a problem with the cable connecting them. The cable could be damaged, defective, or incompatible with the devices. A technician should replace the cable with a known good one and check if the link LEDs light up. If not, the problem could be with the network interface cards (NICs) on the workstation or modem. References: <https://www.comptia.org/blog/what-is-link-light>

NEW QUESTION 188

- (Topic 2)

A systems administrator is running a VoIP network and is experiencing jitter and high latency. Which of the following would BEST help the administrator determine the cause of these issues?

- A. Enabling RADIUS on the network
- B. Configuring SNMP traps on the network
- C. Implementing LDAP on the network
- D. Establishing NTP on the network

Answer: B

Explanation:

SNMP (Simple Network Management Protocol) is a protocol that allows network devices to communicate with a network management system (NMS) for monitoring and configuration purposes. SNMP traps are unsolicited messages sent by network devices to the NMS when certain events or conditions occur, such as errors, failures, or thresholds. Configuring SNMP traps on the network would best help the administrator determine the cause of jitter and high latency on a VoIP network, as they would provide real-time alerts and information about the network performance and status. Enabling RADIUS on the network is not relevant to troubleshooting VoIP issues, as RADIUS is a protocol that provides authentication, authorization, and accounting services for network access. Implementing LDAP on the network is also not relevant to troubleshooting VoIP issues, as LDAP is a protocol that provides directory services for storing and querying information about users, groups, devices, etc. Establishing NTP on the network is not directly related to troubleshooting VoIP issues, as NTP is a protocol that synchronizes the clocks of network devices.

NEW QUESTION 189

- (Topic 2)

Which of the following security devices would be BEST to use to provide mechanical access control to the MDF/IDF?

- A. A smart card
- B. A key fob
- C. An employee badge
- D. A door lock

Answer: D

Explanation:

A door lock would be the best security device to use to provide mechanical access control to the MDF/IDF. A door lock is a device that prevents unauthorized access to a physical area by requiring a key, a code, a card, a biometric scan, or a combination of these factors to open it. A door lock can provide mechanical access control to the MDF/IDF, which are rooms that house network equipment such as switches, routers, servers, or patch panels. A door lock can prevent unauthorized persons from tampering with or stealing the network equipment or data. References:
https://www.cisco.com/c/en/us/td/docs/solutions/Enterprise/Data_Center/DC_Infra2_5/DCInfra_6.html

NEW QUESTION 191

- (Topic 2)

A small, family-run business uses a single SOHO router to provide Internet and WiFi to its employees. At the start of a new week, employees come in and find their usual WiFi network is no longer available, and there is a new wireless network to which they cannot connect. Given that information, which of the following should have been done to avoid this situation?

- A. The device firmware should have been kept current.
- B. Unsecure protocols should have been disabled.
- C. Parental controls should have been enabled
- D. The default credentials should have been changed

Answer: D

Explanation:

The default credentials are the username and password that come with a device or service when it is first installed or configured. They are often easy to guess or find online, which makes them vulnerable to unauthorized access or attacks. The default credentials should be changed to something unique and strong as soon as possible to avoid this situation. If the default credentials were not changed, someone could have accessed the SOHO router and changed the WiFi settings without the employees' knowledge. References: <https://www.comptia.org/blog/network-security-basics-6-easy-ways-to-protect-your-network>

NEW QUESTION 192

- (Topic 2)

Which of the following policies is MOST commonly used for guest captive portals?

- A. AUP
- B. DLP
- C. BYOD
- D. NDA

Answer: A

Explanation:

AUP stands for Acceptable Use Policy, which is a policy that defines the rules and guidelines for using a network or service. A guest captive portal is a web page that requires users to agree to the AUP before accessing the Internet or other network resources. This is a common way to enforce security and legal compliance for guest users. References: https://www.arubanetworks.com/techdocs/Instant_87_WebHelp/Content/instant-ug/captive-portal/captive-portal.htm

NEW QUESTION 195

- (Topic 2)

A user recently made changes to a PC that caused it to be unable to access websites by both FQDN and IP. Local resources, such as the file server, remain accessible. Which of the following settings did the user MOST likely misconfigure?

- A. Static IP
- B. Default gateway
- C. DNS entries
- D. Local host file

Answer: B

Explanation:

The default gateway is the setting that the user most likely misconfigured on the PC that caused it to be unable to access websites by both FQDN and IP. The default gateway is a device, usually a router or a firewall, that connects a local network to other networks such as the Internet. It acts as an intermediary between devices on different networks and forwards packets based on their destination IP addresses. If the default gateway is not configured correctly on a PC, it will not be able to communicate with devices outside its local network, such as web servers or DNS servers. References:
<https://www.cisco.com/c/en/us/support/docs/ip/routing-information-protocol-rip/16448-default-gateway.html>

NEW QUESTION 200

- (Topic 2)

A customer wants to segregate the traffic between guests on a hypervisor. Which of the following does a technician need to configure to meet the requirement?

- A. Virtual switches
- B. OSPF routing
- C. Load balancers
- D. NIC teaming
- E. Fibre Channel

Answer: A

Explanation:

A virtual switch is a software-based switch that connects virtual machines on a hypervisor. A virtual switch can create and manage VLANs, which are logical segments of a network that isolate traffic between different groups of devices. A customer can use virtual switches to segregate the traffic between guests on a hypervisor by creating a separate VLAN for each guest and assigning it to a virtual switch port. References:
<https://www.comptia.org/blog/what-is-a-virtual-switch>

NEW QUESTION 201

- (Topic 2)

An ARP request is broadcasted and sends the following request. "Who is 192.168.1.200?

Tell 192.168.1.55"

At which of the following layers of the OSI model does this request operate?

- A. Application
- B. Data link
- C. Transport
- D. Network
- E. Session

Answer: B

Explanation:

An ARP request operates at the data link layer of the OSI model. ARP (Address Resolution Protocol) is a protocol that maps IP addresses to MAC addresses on a local area network. It allows devices to communicate with each other without knowing their MAC addresses beforehand. ARP operates at the data link layer (layer 2) of the OSI model, which is responsible for framing and addressing data packets on a physical medium. References:

<https://www.cisco.com/c/en/us/support/docs/ip/routing-information-protocol-rip/13788-3.html>

NEW QUESTION 203

- (Topic 2)

Which of the following is MOST commonly used to address CVEs on network equipment and/or operating systems?

- A. Vulnerability assessment
- B. Factory reset
- C. Firmware update
- D. Screened subnet

Answer: C

Explanation:

Firmware is a type of software that controls the low-level functions of a hardware device, such as a router, switch, printer, or camera. Firmware updates are patches or upgrades that fix bugs, improve performance, add features, or address security vulnerabilities in firmware. Firmware updates are commonly used to address CVEs (Common Vulnerabilities and Exposures) on network equipment and operating systems, as CVEs are publicly known flaws that can be exploited by attackers. References: <https://www.comptia.org/blog/what-is-firmware>

NEW QUESTION 206

- (Topic 2)

Which of the following technologies allows traffic to be sent through two different ISPs to increase performance?

- A. Fault tolerance
- B. Quality of service
- C. Load balancing
- D. Port aggregation

Answer: C

Explanation:

Load balancing is a technology that allows traffic to be sent through two different ISPs to increase performance. Load balancing is a process of distributing network traffic across multiple servers or links to optimize resource utilization, throughput, latency, and reliability. Load balancing can be implemented at different layers of the OSI model, such as layer 4 (transport) or layer 7 (application). Load balancing can also be used for outbound traffic by using multiple ISPs and routing protocols such as BGP (Border Gateway Protocol) to select the best path for each packet. References: https://www.cisco.com/c/en/us/products/collateral/ios-nx-os-software/border-gateway-protocol-bgp/prod_white_paper0900aecd806c4eeb.html

NEW QUESTION 209

- (Topic 3)

A user reports having intermittent connectivity issues to the company network. The network configuration for the user reveals the following:

IP address: 192.168.1.10

Subnet mask: 255.255.255.0

Default gateway: 192.168.1.254

The network switch shows the following ARP table:

MAC address	IP address	Interface	VLAN
0c00.1134.0001	192.168.1.10	eth4	10
0c00.1983.210a	192.168.2.13	eth5	11
0c00.1298.d239	192.168.1.10	eth6	10
0c00.a291.c113	192.168.2.12	eth7	11
0c00.923b.2391	192.168.1.11	eth8	10
feff.2391.1022	192.168.1.254	eth1	10

Which of the following is the most likely cause of the user's connection issues?

- A. A port with incorrect VLAN assigned
- B. A switch with spanning tree conflict
- C. Another PC with manually configured IP

D. A router with overlapping route tables

Answer: C

Explanation:

This is the most likely cause of the user's connection issues, because the ARP table of the switch shows that there are two devices with the same IP address of 192.168.1.10, but different MAC addresses. This indicates that there is an IP address conflict on the network, where two devices are trying to use the same IP address. This can cause intermittent connectivity issues, as the switch may not be able to forward packets to the correct destination .

NEW QUESTION 214

- (Topic 3)

A network resource was accessed by an outsider as a result of a successful phishing campaign. Which of the following strategies should be employed to mitigate the effects of phishing?

- A. Multifactor authentication
- B. Single sign-on
- C. RADIUS
- D. VPN

Answer: A

Explanation:

Multifactor authentication is a security measure that requires users to provide multiple pieces of evidence before they can access a network resource. This could include requiring users to enter a username, password, and a code sent to the user's mobile phone before they are allowed access. This ensures that the user is who they say they are, reducing the risk of malicious actors gaining access to network resources as a result of a successful phishing campaign.

NEW QUESTION 219

- (Topic 3)

A network administrator is concerned about a rainbow table being used to help access network resources. Which of the following must be addressed to reduce the likelihood of a rainbow table being effective?

- A. Password policy
- B. Remote access policy
- C. Acceptable use policy
- D. Data loss prevention policy

Answer: A

Explanation:

A password policy must be addressed to reduce the likelihood of a rainbow table being effective. A rainbow table is a precomputed table of hashed passwords and their corresponding plaintext values. A rainbow table can be used to crack hashed passwords by performing a reverse lookup of the hash value in the table. A password policy is a set of rules and guidelines that define how passwords should be created, used, and managed in an organization. A password policy can help prevent rainbow table attacks by enforcing strong password requirements, such as length, complexity, expiration, and history. A strong password is one that is hard to guess or crack by using common methods such as brute force or dictionary attacks. References: [CompTIA Network+ Certification Exam Objectives], What Is Rainbow Table Attack? | Kaspersky, Password Policy Best Practices | Thycotic

NEW QUESTION 222

- (Topic 3)

Which of the following describes traffic going in and out of a data center from the internet?

- A. Demarcation point
- B. North-South
- C. Fibre Channel
- D. Spine and leaf

Answer: B

NEW QUESTION 227

- (Topic 3)

A network administrator is working to configure a new device to provide Layer 2 connectivity to various endpoints including several WAPs. Which of the following devices will the administrator MOST likely configure?

- A. WLAN controller
- B. Cable modem
- C. Load balancer
- D. Switch
- E. Hub

Answer: D

Explanation:

A switch is a device that provides Layer 2 connectivity to various endpoints by forwarding frames based on MAC addresses. A switch can also connect to several WAPs (wireless access points) to provide wireless connectivity to wireless devices.

NEW QUESTION 230

- (Topic 3)

Which of the following is the most secure connection used to inspect and provide controlled internet access when remote employees are connected to the corporate network?

- A. Site-to-site VPN
- B. Full-tunnel VPN
- C. Split-tunnel VPN
- D. SSH

Answer: B

Explanation:

A full-tunnel VPN is a type of virtual private network (VPN) that encrypts and routes all the traffic from the remote device to the corporate network, regardless of the destination or protocol. This provides a secure connection for the remote employees to access the corporate resources, as well as inspect and control the internet access through the corporate firewall and proxy servers. A full-tunnel VPN also prevents any leakage of sensitive data or exposure to malicious attacks from the public internet. A full-tunnel VPN is more secure than a split-tunnel VPN, which only encrypts and routes the traffic destined for the corporate network, while allowing the traffic for other destinations to bypass the VPN and use the local internet connection. A site-to-site VPN is a type of VPN that connects two or more networks, such as branch offices or data centers, over the internet. It is not suitable for connecting individual remote employees to the corporate network. SSH stands for Secure Shell, and it is a protocol that allows secure remote login and command execution over an encrypted channel. It is not a type of VPN, and it does not provide controlled internet access. References: CompTIA Network+ N10-008 Cert Guide, Chapter 5, Section 5.3

NEW QUESTION 235

- (Topic 3)

A network technician has determined the cause of a network disruption. Which of the following is the NEXT step for the technician to perform?

- A. Validate the findings in a top-to-bottom approach
- B. Duplicate the issue, if possible
- C. Establish a plan of action to resolve the issue
- D. Document the findings and actions

Answer: C

NEW QUESTION 240

- (Topic 3)

A technician received a report that some users in a large, 30-floor building are having intermittent connectivity issues. Users on each floor have stable connectivity, but do not have connectivity to other floors. Which of the following devices is MOST likely causing the issue?

- A. User devices
- B. Edge devices
- C. Access switch
- D. Core switch

Answer: D

Explanation:

A core switch is the most likely device causing the issue where users on each floor have stable connectivity, but do not have connectivity to other floors. A core switch is a high-performance switch that connects multiple access switches in a network. An access switch is a switch that connects end devices, such as computers and printers, to the network. A core switch acts as the backbone of the network, providing interconnection and routing between different subnets or VLANs. If the core switch is malfunctioning or misconfigured, it can prevent communication between different segments of the network, resulting in intermittent connectivity issues. References: [CompTIA Network+ Certification Exam Objectives], Core Switch vs Access Switch: What Are the Differences?

NEW QUESTION 242

- (Topic 3)

A network administrator needs to monitor traffic on a specific port on a switch. Which of the following should the administrator configure to accomplish the task?

- A. Port security
- B. Port tagging
- C. Port mirroring
- D. Media access control

Answer: C

Explanation:

Port mirroring is a technique that allows a network administrator to monitor the traffic on a specific port on a switch by sending a copy of the packets seen on that port to another port where a monitoring device is connected¹. Port mirroring can be used to analyze and debug data, diagnose errors, or perform security audits on the network without affecting the normal operation of the switch

NEW QUESTION 247

- (Topic 3)

While setting up a new workstation, a technician discovers that the network connection is only 100 full duplex (FD), although it is connected to a gigabit switch. While reviewing the interface information in the switch CLI, the technician notes the port is operating at IOOFD but Shows many RX and TX errors. The technician moves the computer to another switchport and experiences the same issues. Which of the following is MOST likely the cause of the low data rate and port errors?

- A. Bad switch ports
- B. Duplex issues
- C. Cable length
- D. Incorrect pinout

Answer: B

NEW QUESTION 250

- (Topic 3)

Which of the following is a security flaw in an application or network?

- A. A threat
- B. A vulnerability
- C. An exploit
- D. A risk

Answer: B

Explanation:

A vulnerability is a security flaw in an application or network that can be exploited by an attacker, allowing them to gain access to sensitive data or take control of the system. Vulnerabilities can range from weak authentication methods to unpatched software, allowing attackers to gain access to the system or data they would not otherwise be able to access. Exploits are programs or techniques used to take advantage of vulnerabilities, while threats are potential dangers, and risks are the likelihood of a threat becoming a reality.

NEW QUESTION 253

- (Topic 3)

Which of the following is the IEEE link cost for a Fast Ethernet interface in STP calculations?

- A. 2
- B. 4
- C. 19
- D. 100

Answer: D

Explanation:

The IEEE standard for link cost for a Fast Ethernet interface is 100, and for a Gigabit Ethernet interface is 19. These values are based on the bandwidth of the interface, with lower values indicating a higher-bandwidth interface.

NEW QUESTION 256

- (Topic 3)

An IT intern moved the location of a WAP from one conference room to another. The WAP was unable to boot following the move. Which of the following should be used to fix the issue?

- A. Antenna
- B. WLAN controller
- C. Media converter
- D. PoE injector

Answer: D

Explanation:

A PoE injector is a device that provides power over Ethernet (PoE) to a WAP or other network device that does not have a built-in power supply. A PoE injector connects to a power outlet and an Ethernet cable, and sends both power and data to the WAP. If the WAP was moved to a location where there is no power outlet or PoE switch, it would need

a PoE injector to boot up. References:

? Part 3 of the current page talks about PoE and PoE injectors as a way to power WAPs.

? [This article] explains how PoE injectors work and how to use them.

NEW QUESTION 259

- (Topic 3)

A network engineer designed and implemented a new office space with the following characteristics:

Building construction type:	Brick
Layout:	10,764sq ft (1,000sq m) commercial office space
Users:	50
Servers:	2
Laptops:	50

One month after the office space was implemented, users began reporting dropped signals when entering another room and overall poor connections to the 5GHz network. 'which of the following should the engineer do to best resolve the issue?

- A. use non-overlapping channels
- B. Reconfigure the network to support 2.4GHz_
- C. Upgrade to WPA3.
- D. Change to directional antennas-

Answer: D

Explanation:

The best solution to resolve the issue of dropped signals and poor connections to the 5GHz network is to change to directional antennas. Directional antennas are antennas that focus the wireless signal in a specific direction, increasing the range and strength of the signal. Directional antennas are suitable for environments where there are obstacles or interference that can weaken or block the wireless signal. In the image, the office space has several walls and doors that can reduce the signal quality of the 5GHz network, which has a shorter wavelength and higher frequency than the 2.4GHz network. By using directional antennas, the network engineer can aim the wireless signal towards the desired areas and avoid the signal loss caused by the walls and doors. References: CompTIA Network+ N10-008 Certification Study Guide, page 76; The Official CompTIA Network+ Student Guide (Exam N10-008), page 2-19.

NEW QUESTION 260

- (Topic 3)

A technician installed an 8-port switch in a user's office. The user needs to add a second computer in the office, so the technician connects both PCs to the switch and connects the switch to the wall jack. However, the new PC cannot connect to network resources. The technician then observes the following:

- The new computer does not get an IP address on the client's VLAN.
- Both computers have a link light on their NICs.
- The new PC appears to be operating normally except for the network issue.
- The existing computer operates normally.

Which of the following should the technician do NEXT to address the situation?

- A. Contact the network team to resolve the port security issue.
- B. Contact the server team to have a record created in DNS for the new PC.
- C. Contact the security team to review the logs on the company's SIEM.
- D. Contact the application team to check NetFlow data from the connected switch.

Answer: A

NEW QUESTION 261

- (Topic 3)

Due to space constraints in an IDF, a network administrator can only do a single switch to accommodate three data networks. The administrator needs a configuration that will allow each device to access its expected network without additional connections. The configuration must also allow each device to access the rest of the network. Which of the following should the administrator do to meet these requirements? (Select TWO).

- A. Untag the three VLANs across the uplink
- B. Tag an individual VLAN across the uplink
- C. Untag an individual VLAN per device port
- D. Tag an individual VLAN per device port
- E. Tag the three VLANs across the uplink.
- F. Tag the three VLANs per device port.

Answer: AC

Explanation:

To achieve this, you should do two things:

? Tag the three VLANs across the uplink port that connects to another switch or router. This will allow data packets from different VLANs to cross over into other networks.

? Untag an individual VLAN per device port that connects to an end device. This will assign each device to its expected network without additional connections.

NEW QUESTION 263

- (Topic 3)

A network administrator is investigating a performance issue on a dual-link connection—VPN and MPLS—to a partner network. The MPLS is the primary path, and the VPN is used as a backup. While communicating, the delay is measured at 18ms, which is higher than the 6ms expected when the MPLS link is operational but lower than the 30ms expected for the VPN connection. Which of the following will MOST likely point to the root cause of the Issue?

- A. Checking the routing tables on both sides to ensure there is no asymmetric routing
- B. Checking on the partner network for a missing route pointing to the VPN connection
- C. Running iPerf on both sides to confirm the delay that is measured is accurate
- D. Checking for an incorrect VLAN assignment affecting the MPLS traffic

Answer: A

Explanation:

Asymmetric routing can occur when two routers have different paths for the same two hosts, resulting in increased latency and possible packet loss. According to the CompTIA Network+ Study Manual, "If the path from the source to the destination is not the same in both directions, the packets will take different routes and the latency can increase significantly." To confirm this, the network administrator should check the routing tables on both sides of the connection and ensure that the same path is used in both directions.

NEW QUESTION 266

- (Topic 3)

A company is opening a new building on the other side of its campus. The distance from the closest building to the new building is 1,804ft (550m). The company needs to connect the networking equipment in the new building to the Other buildings on the campus without using a repeater. Which Of the following transceivers should the company use?

- A. 10GBASE-SW
- B. 10GBASE-LR
- C. 10GBASE-LX4 over multimode fiber
- D. 10GBASE-SR

Answer: B

Explanation:

10GBASE-LR is a standard for 10 Gbps Ethernet over single-mode fiber optic cable. It can support a maximum distance of 6.2 miles (10 km), which is much longer than the distance between the buildings. 10GBASE-SW, 10GBASE-LX4, and 10GBASE-SR are all standards for 10 Gbps Ethernet over multimode fiber optic cable, which have shorter maximum distances ranging from 984ft (300m) to 1,312ft (400m).
References: CompTIA Network+ Certification Exam Objectives Version 7.0 (N10-007), Objective 1.5: Compare and contrast network cabling types, standards and speeds.

NEW QUESTION 270

- (Topic 3)

A company is reviewing ways to cut the overall cost of its IT budget. A network technician suggests removing various computer programs from the IT budget and only providing these programs on an as-needed basis. Which of the following models would meet this requirement?

- A. Multitenancy
- B. IaaS
- C. SaaS
- D. VPN

Answer: C

Explanation:

SaaS stands for Software as a Service and is a cloud computing model where software applications are hosted and delivered over the internet by a service provider. SaaS can help the company cut the overall cost of its IT budget by eliminating the need to purchase, install, update, and maintain various computer programs on its own devices. The company can access the programs on an as-needed basis and pay only for what it uses. Multitenancy is a feature of cloud computing where multiple customers share the same physical or virtual resources. IaaS stands for Infrastructure as a Service and is a cloud computing model where computing resources such as servers, storage, and networking are provided over the internet by a service provider. VPN stands for Virtual Private Network and is a technology that creates a secure and encrypted connection over a public network.

References: CompTIA Network+ Certification Exam Objectives Version 7.0 (N10-007), Objective 1.9: Compare and contrast common network service types.

NEW QUESTION 272

- (Topic 3)

A network technician needs to ensure that all files on a company's network can be moved in a safe and protected manner without interception from someone who is not the intended recipient. Which of the following would allow the network technician to meet these requirements?

- A. FTP
- B. TFTP
- C. SMTP
- D. SFTP

Answer: D

NEW QUESTION 276

- (Topic 3)

A network architect is developing documentation for an upcoming IPv4/IPv6 dual-stack implementation. The architect wants to shorten the following IPv6 address: ef82:0000:0000:0000:0000:1ab1:1234:1bc2. Which of the following is the MOST appropriate shortened version?

- A. ef82:0:1ab1:1234:1bc2
- B. ef82:0::1ab1:1234:1bc2
- C. ef82:0:0:0:0:1ab1:1234:1bc2
- D. ef82::1ab1:1234:1bc2

Answer: D

Explanation:

The most appropriate shortened version of the IPv6 address ef82:0000:0000:0000:0000:1ab1:1234:1bc2 is ef82::1ab1:1234:1bc2. IPv6 addresses are 128-bit hexadecimal values that are divided into eight groups of 16 bits each, separated by colons. IPv6 addresses can be shortened by using two rules: omitting leading zeros within each group, and replacing one or more consecutive groups of zeros with a double colon (::). Only one double colon can be used in an address. Applying these rules to the given address results in ef82::1ab1:1234:1bc2. References: CompTIA Network+ N10-008 Certification Study Guide, page 114; The Official CompTIA Network+ Student Guide (Exam N10-008), page 5-7.

NEW QUESTION 279

- (Topic 3)

A network technician wants to deploy a new wireless access point to reduce user latency. Currently, the organization has the following deployed: Which of the following channels should the new device broadcast on?

- A. Channel 3
- B. Channel 9
- C. Channel 10
- D. Channel 11

Answer: D

Explanation:

The best channel for a new wireless access point is one that does not overlap with the existing channels used by other devices. Overlapping channels can cause interference and degrade the performance of the wireless network. According to the web search results, the 2.4 GHz band has 11 channels in the U.S., but only channels 1, 6, and 11 are non-overlapping. Since the existing devices are using channels 1 and 6, the new device should use channel 11 to avoid adjacent-channel interference.

References: 1: Why Channels 1, 6 and 11? | MetaGeek 2: How to Choose the Best Wi-Fi Channels for Your Network - Lifewire

NEW QUESTION 283

- (Topic 3)

Network traffic is being compromised by DNS poisoning every time a company's router is connected to the internet. The network team detects a non-authorized DNS server being assigned to the network clients and remediates the incident by setting a trusted DNS server, but the issue occurs again after internet exposure. Which of the following best practices should be implemented on the router?

- A. Change the device's default password.
- B. Disable router advertisement guard.
- C. Activate control plane policing.
- D. Disable unneeded network services.

Answer: A

NEW QUESTION 285

- (Topic 3)

An ISP is providing Internet to a retail store and has terminated its point of connection using a standard Cat 6 pin-out. Which of the following terminations should the technician use when running a cable from the ISP's port to the front desk?

- A. F-type connector
- B. TIA/EIA-568-B
- C. LC
- D. SC

Answer: B

Explanation:

The termination that the technician should use when running a cable from the ISP's port to the front desk is B. TIA/EIA-568-B. This is a standard pin-out for Cat 6 cables that is used for Ethernet and other network physical layers. It specifies how to arrange the eight wires in an RJ45 connector, which is a common type of connector for network cables.

NEW QUESTION 289

- (Topic 3)

Users are reporting poor wireless performance in some areas of an industrial plant. The wireless controller is measuring a low EIRP value compared to the recommendations noted on the most recent site survey. Which of the following should be verified or replaced for the EIRP value to meet the site survey's specifications? (Select TWO).

- A. AP transmit power
- B. Channel utilization
- C. Signal loss
- D. Update ARP tables
- E. Antenna gain
- F. AP association time

Answer: AE

Explanation:

? AP transmit power: You should check if your APs have sufficient power output and adjust them if needed. You should also make sure they are not exceeding regulatory limits for your region.

? Antenna gain: You should check if your antennas have adequate gain for your coverage area and replace them if needed. You should also make sure they are aligned properly and not obstructed by any objects.

In the scenario described, the wireless controller is measuring a low EIRP value compared to the recommendations noted in the most recent site survey. EIRP is the combination of the power transmitted by the access point and the antenna gain. Therefore, to increase the EIRP value to meet the site survey's specifications, the administrator should verify or replace the AP transmit power (option A) and the antenna gain (option E). This can be achieved by adjusting the transmit power settings on the AP or by replacing the AP's antenna with one that has a higher gain.

NEW QUESTION 294

- (Topic 3)

Which of the following attacks utilizes a network packet that contains multiple network tags?

- A. MAC flooding
- B. VLAN hopping
- C. DNS spoofing
- D. ARP poisoning

Answer: B

NEW QUESTION 299

- (Topic 3)

Which of the following architectures would allow the network-forwarding elements to adapt to new business requirements with the least amount of operating effort?

- A. Software-defined network
- B. Spine and leaf
- C. Three-tier
- D. Backbone

Answer: A

Explanation:

Software-defined network (SDN) is a network architecture that allows the network-forwarding elements to be controlled by a centralized software application. This

enables the network to adapt to new business requirements with the least amount of operating effort, as the network administrator can configure and manage the network from a single console, without having to manually configure each device individually. SDN also provides more flexibility, agility, and scalability for the network, as it can dynamically adjust the network resources and policies based on the application needs and traffic conditions.

References:

? CompTIA Network+ Certification Exam Objectives, page 5, section 1.3: “Explain the concepts and characteristics of routing and switching.”

? Software-Defined Networking – CompTIA Network+ N10-007 – 1.3, video lecture by Professor Messer.

NEW QUESTION 300

- (Topic 3)

A customer connects a firewall to an ISP router that translates traffic destined for the internet. The customer can connect to the internet but not to the remote site. Which of the following will verify the status of NAT?

- A. tcpdump
- B. nmap
- C. ipconfig
- D. tracert

Answer: A

Explanation:

tcpdump is a command-line tool that can capture and analyze network traffic on a given interface. tcpdump can verify the status of NAT by showing the source and destination IP addresses of the packets before and after they pass through the ISP router that translates traffic destined for the internet. tcpdump can also show the NAT protocol and port numbers used by the router. nmap, ipconfig, and tracert are not suitable tools for verifying the status of NAT, as they do not show the IP address translation process.

References

? 1: Network Address Translation – N10-008 CompTIA Network+ : 1.4

? 2: CompTIA Network+ N10-008 Certification Study Guide, page 95-96

? 3: CompTIA Network+ N10-008 Exam Subnetting Quiz, question 16

? 4: CompTIA Network+ N10-008 Certification Practice Test, question 7

NEW QUESTION 305

- (Topic 3)

Which of the following, in addition to a password, can be asked of a user for MFA?

- A. PIN
- B. Favorite color
- C. Hard token
- D. Mother's maiden name

Answer: A

Explanation:

MFA stands for Multi-Factor Authentication, which is a method of verifying the identity of a user by requiring two or more pieces of evidence that belong to different categories: something the user knows, something the user has, or something the user is. A password is something the user knows, and it is usually combined with another factor such as a PIN (Personal Identification Number) or a hard token (a physical device that generates a one- time code) that the user has. A favorite color or a mother's maiden name are not suitable for MFA, as they are also something the user knows and can be easily guessed or compromised.

References

? 1: Multi-Factor Authentication – N10-008 CompTIA Network+ : 3.1

? 2: CompTIA Network+ Certification Exam Objectives, page 13

? 3: CompTIA Network+ N10-008 Certification Study Guide, page 250

? 4: CompTIA Network+ N10-008 Exam Subnetting Quiz, question 14

NEW QUESTION 308

- (Topic 3)

Users are reporting performance issues when attempting to access the main fileshare server. Which of the following steps should a network administrator perform next based on the network troubleshooting methodology?

- A. Implement a fix to resolve the connectivity issues.
- B. Determine if anything has changed.
- C. Establish a theory of probable cause.
- D. Document all findings, actions, and lessons learned.

Answer: B

Explanation:

According to the network troubleshooting methodology, the first step is to identify the problem and gather information about the current state of the network using the network troubleshooting tools that are available¹. The next step is to determine if anything has changed in the network configuration, environment, or usage that could have caused or contributed to the performance issues¹. This step helps to narrow down the possible causes and eliminate irrelevant factors. For example, the network administrator could check if there were any recent updates, patches, or modifications to the fileshare server or the network devices that connect to it. They could also check if there was an increase in network traffic or demand for the fileshare server resources².

The other options are not correct because they are not the next steps in the network troubleshooting methodology. Implementing a fix to resolve the connectivity issues (A) is premature without determining the root cause of the problem. Establishing a theory of probable cause © is a later step that requires testing and verification. Documenting all findings, actions, and lessons learned (D) is the final step that should be done after resolving the problem and restoring normal network operations¹.

NEW QUESTION 311

- (Topic 3)

A network administrator would like to purchase a device that provides access ports to endpoints and has the ability to route between networks. Which of the following would be BEST for the administrator to purchase?

- A. An IPS
- B. A Layer 3 switch
- C. A router
- D. A wireless LAN controller

Answer: B

NEW QUESTION 313

- (Topic 3)

A customer reports there is no access to resources following the replacement of switches. A technician goes to the site to examine the configuration and discovers redundant links between two switches. Which of the following is the reason the network is not functional?

- A. The ARP cache has become corrupt.
- B. CSMA/CD protocols have failed.
- C. STP is not configured.
- D. The switches are incompatible models

Answer: C

Explanation:

The reason the network is not functional is that STP (Spanning Tree Protocol) is not configured on the switches. STP is a protocol that prevents loops in a network topology by blocking redundant links between switches. If STP is not enabled, the switches will forward broadcast frames endlessly, creating a broadcast storm that consumes network resources and disrupts communication. References: CompTIA Network+ N10-008 Certification Study Guide, page 67; The Official CompTIA Network+ Student Guide (Exam N10-008), page 2-14.

NEW QUESTION 318

- (Topic 3)

Which of the following is the most accurate NTP time source that is capable of being accessed across a network connection?

- A. Stratum 0 device
- B. Stratum 1 device
- C. Stratum 7 device
- D. Stratum 16 device

Answer: B

Explanation:

NTP (Network Time Protocol) is a protocol that synchronizes the clocks of network devices with a reference time source. NTP uses a hierarchical system of time sources, called strata, to distribute the time information. A stratum 0 device is the most accurate time source, such as an atomic clock or a GPS receiver, but it is not directly accessible across a network connection. A stratum 1 device is a network device that is directly connected to a stratum 0 device, such as a dedicated NTP server or a router with a GPS antenna, and it acts as a primary time server for other network devices. A stratum 2 device is a network device that synchronizes its time with a stratum 1 device, and so on. The higher the stratum number, the lower the accuracy and reliability of the time source. A stratum 16 device is a network device that has no valid time source and is considered unsynchronized.

References:

? Part 1 of current page talks about how Bing is your AI-powered copilot for the web and provides various examples of how it can help you with different tasks, such as writing a joke, creating a table, or summarizing research. However, it does not mention anything about NTP or time sources.

? Part 2 of current page shows the search results for “ai powered search bing chat”, which include web, image, and news results. However, none of these results seem to be relevant to the question, as they are mostly about Bing’s features, products, or announcements, not about NTP or time sources.

? Therefore, I cannot find the answer or the explanation from the current page. I have to use my own knowledge and information from other sources to verify the answer and provide a short but comprehensive explanation. I will cite these sources using numerical references.

? : CompTIA Network+ Certification Exam Objectives, Version 8.0, Domain 2.0: Infrastructure, Objective 2.5: Given a scenario, implement network time synchronization, Subobjective 2.5.1: NTP, <https://www.comptia.jp/pdf/comptia-network-n10-008-exam-objectives.pdf>

? : Network Time Protocol (NTP), <https://www.cisco.com/c/en/us/about/press/internet-protocol-journal/back-issues/table-contents-58/154-ntp.html>

? : How NTP Works, <https://www.meinbergglobal.com/english/info/ntp.htm>

NEW QUESTION 323

- (Topic 3)

Users in a branch can access an In-house database server, but it is taking too long to fetch records. The analyst does not know whether the issue is being caused by network latency. Which of the following will the analyst MOST likely use to retrieve the metrics that are needed to resolve this issue?

- A. SNMP
- B. Link state
- C. Syslog
- D. QoS
- E. Traffic shaping

Answer: A

NEW QUESTION 326

- (Topic 3)

Which of the following devices is used to configure and centrally manage access points installed at different locations?

- A. Wireless controller
- B. Load balancer
- C. Proxy server
- D. VPN concentrator

Answer: A

Explanation:

Access points (APs) can be configured and centrally managed using a wireless LAN controller (WLC). A WLC is a device that connects to multiple APs and provides centralized management and control of those APs. The WLC can be used to configure settings such as wireless network parameters, security settings, and quality of service (QoS) policies. Additionally, the WLC can be used to monitor the status of connected APs, track client connections, and gather statistics on network usage. Some vendors such as Cisco, Aruba, Ruckus, etc. provide wireless LAN controllers as part of their wireless networking solutions.

NEW QUESTION 328

- (Topic 3)

A bank installed a new smart TV to stream online video services, but the smart TV was not able to connect to the branch Wi-Fi. The next day, a technician was able to connect the TV to the Wi-Fi, but a bank laptop lost network access at the same time. Which of the following is the MOST likely cause?

- A. DHCP scope exhaustion
- B. AP configuration reset
- C. Hidden SSID
- D. Channel overlap

Answer: A

Explanation:

DHCP scope exhaustion is the situation when a DHCP server runs out of available IP addresses to assign to clients. DHCP stands for Dynamic Host Configuration Protocol, which is a network protocol that automatically assigns IP addresses and other configuration parameters to clients on a network. A DHCP scope is a range of IP addresses that a DHCP server can distribute to clients. If the DHCP scope is exhausted, new clients will not be able to obtain an IP address and connect to the network. This can explain why the smart TV was not able to connect to the branch Wi-Fi on the first day, and why the bank laptop lost network access on the next day when the TV was connected. The technician should either increase the size of the DHCP scope or reduce the lease time of the IP addresses to avoid DHCP scope exhaustion. References: [CompTIA Network+ Certification Exam Objectives], DHCP Scope Exhaustion - What Is It? How Do You Fix It?

NEW QUESTION 330

- (Topic 3)

Which of the following technologies would MOST likely be used to prevent the loss of connection between a virtual server and network storage devices?

- A. Multipathing
- B. VRRP
- C. Port aggregation
- D. NIC teaming

Answer: D

Explanation:

NIC teaming is a technology that allows multiple network interface cards (NICs) to work together as a single logical interface, providing redundancy and load balancing. This can prevent the loss of connection between a virtual server and network storage devices if one of the NICs fails or becomes disconnected. References: [CompTIA Network+ Certification Exam Objectives], Domain 2.0 Networking Concepts, Objective 2.5: Explain the purposes and use cases for advanced networking devices, Subobjective: NIC bonding/teaming

NEW QUESTION 332

- (Topic 3)

Which of the following is the best action to take before sending a network router to be recycled as electronic waste?

- A. Turn on port security.
- B. Shred the switch hard drive.
- C. Back up and erase the configuration.
- D. Remove the company asset ID tag.

Answer: C

Explanation:

Before disposing of a network router, it is important to back up and erase the configuration to prevent unauthorized access to sensitive data and network settings. A network router may contain information such as passwords, IP addresses, firewall rules, VPN settings, and other network parameters that could be exploited by hackers or malicious users. By backing up the configuration, you can preserve the network settings for future reference or reuse. By erasing the configuration, you can wipe out the data and restore the router to its factory default state.

NEW QUESTION 335

- (Topic 3)

A Wi-Fi network was recently deployed in a new, multilevel building. Several issues are now being reported related to latency and drops in coverage. Which of the following is the FIRST step to troubleshoot the issues?

- A. Perform a site survey.
- B. Review the AP placement
- C. Monitor channel utilization.
- D. Test cable attenuation.

Answer: A

NEW QUESTION 340

- (Topic 3)

A technician is troubleshooting network connectivity from a wall jack. Readings from a multimeter indicate extremely low ohmic values instead of the rated impedance from the switchport. Which of the following is the MOST likely cause of this issue?

- A. Incorrect transceivers
- B. Faulty LED
- C. Short circuit
- D. Upgraded OS version on switch

Answer: C

Explanation:

A short circuit is a condition where two conductors in a circuit are connected unintentionally, creating a low resistance path for the current. This causes the voltage to drop and the current to increase, which can damage the circuit or cause a fire. A multimeter can measure the resistance or impedance of a circuit, and if it shows extremely low values, it indicates a short circuit.

NEW QUESTION 344

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual N10-008 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the N10-008 Product From:

<https://www.2passeasy.com/dumps/N10-008/>

Money Back Guarantee

N10-008 Practice Exam Features:

- * N10-008 Questions and Answers Updated Frequently
- * N10-008 Practice Questions Verified by Expert Senior Certified Staff
- * N10-008 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * N10-008 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year