

Cisco


Exam Questions 300-415

Implementing Cisco SD-WAN Solutions (ENSDWI)



NEW QUESTION 1

Refer to the exhibit.

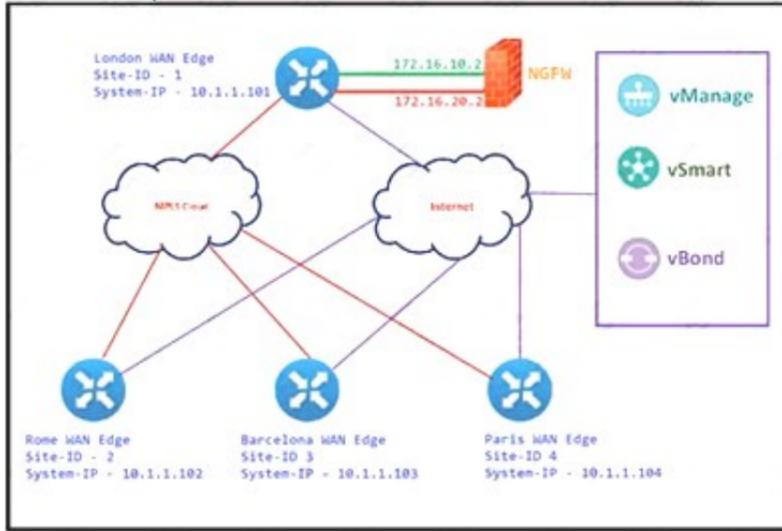

The Cisco SD-WAN is deployed using the default topology. The engineer wants to configure a service insertion policy such that all data traffic between Rome to Paris is forwarded through the NGFW located in London. Which configuration fulfills this requirement, assuming that the Service VPN ID is 1?

A)

```

London WAN Edge
vpn 1
 service netsvc1 address 172.16.10.2
 service netsvc2 address 172.16.20.2
    
```

```

vSmart Policy
policy
lists
 site-list ROME
 site-id 2
 site-list PARIS
 site-id 4
control-policy NGFW-SI
sequence 1
 match route
 site-id ROME
 action accept
 set service netsvc1 vpn 1
sequence 2
 match route
 site-id PARIS
 action accept
 set service netsvc2 vpn 1
 default-action accept
!
apply-policy
 site-list ROME
 control-policy NGFW-SI out
!
 site-list PARIS
 control-policy NGFW-SI out
    
```

B)

```

London WAN Edge
vpn 1
 service netsvc1 address 172.16.10.2
 service netsvc2 address 172.16.20.2
    
```

```

vSmart Policy
policy
lists
 site-list ROME
 site-id 2
 site-list PARIS
 site-id 4
control-policy NGFW-SI
sequence 1
 match route
 site-id ROME
 action accept
sequence 2
 match route
 site-id PARIS
 action accept
 default-action accept
!
apply-policy
 site-list ROME control-policy NGFW-SI out
    
```

C)

```

○ ROME WAN Edge
service FW address 10.1.1.101

PARIS WAN Edge
service FW address 10.1.1.101

vSmart Policy
policy
lists
site-list ROME
site-id 2
site-list PARIS
site-id 4
control-policy NGFW-SI
sequence 1
match route
site-id ROME
action accept
set service netsvc1 vpn 1
sequence 2
match route
site-id PARIS
action accept
set service netsvc2 vpn 1
default-action accept
!
apply-policy
site-list ROME
control-policy NGFW-SI out
!
site-list PARIS
control-policy NGFW-SI out
    
```

D)

```

○ ROME WAN Edge
service FW address 10.1.1.101

PARIS WAN Edge
service FW address 10.1.1.101

vSmart Policy
policy
lists
site-list ROME
site-id 2
site-list PARIS
site-id 4
control-policy NGFW-SI
sequence 1
match route
site-id ROME
action accept
sequence 2
match route
site-id PARIS
action accept
default-action accept
!
apply-policy
site-list ROME control-policy NGFW-SI out
    
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: A

NEW QUESTION 2

An engineer is configuring a centralized policy to influence network route advertisement. Which controller delivers this policy to the fabric?

- A. vSmart
- B. vManage
- C. WAN Edge
- D. vBond

Answer: A

Explanation:

vSmart controllers are the centralized brain of the solution; they implement policies and connectivity between SD-WAN branches. The centralized policy engine in Cisco vSmart controllers provides policy constructs to manipulate routing information, access control, segmentation, extranets, and service chaining.

NEW QUESTION 3

Which two platforms for the Cisco SD-WAN architecture are deployable in a hypervisor on-premises or in IAAS Cloud? (Choose two.)

- A. CSR 1000v
- B. vEdge 100c
- C. vEdge Cloud
- D. vEdge 2000
- E. ISR 4431

Answer: AC

NEW QUESTION 4

What is the role of the Session Traversal Utilities for NAT server provided by the vBond orchestrator?

- A. It facilitates SD-WAN toners and controllers to discover their own mapped or translated IP addresses and port numbers
- B. It prevents SD-WAN Edge routers from forming sessions with public transports among different service providers
- C. It facilitates SD-WAN Edge routers to stay behind a NAT-enabled firewall while the transport addresses of the SD-WAN controller are unNAT-ed
- D. It allows WAN Edge routers to form sessions among MPLS TLOCs using only public IP addresses

Answer: C

NEW QUESTION 5

Refer to the exhibit, which configuration configures IPsec tunnels in active and standby?

```

from-vsmart data-policy_1_ServiceIsertionIPSec
direction from-service
vpn-list 1
  sequence 1
  match destination-ip 64.102.6.247/32
  action accept
  set
  service netvc1
  service local
  default-action accept
    
```

- vpn 1
 service netvc1 interface ipsec1 ipsec2

 vpn-list 1
 count ServicePsec1_275676046
 from-vsmart lists vpn-list 1
 vpn 1
- vpn 0
 service netvc1 interface ipsec1 ipsec2

 from-vsmart lists vpn-list 0
 vpn 0
- vpn 1
 service netvc1 interface ipsec1 ipsec2

 from-vsmart lists vpn-list 1
 vpn 1
- vpn 0
 service netvc1 interface ipsec1 ipsec2


 vpn-list 1
 count ServicePsec1_275676046
 from-vsmart lists vpn-list 0
 vpn 0

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: C

NEW QUESTION 6

Refer to the exhibit.

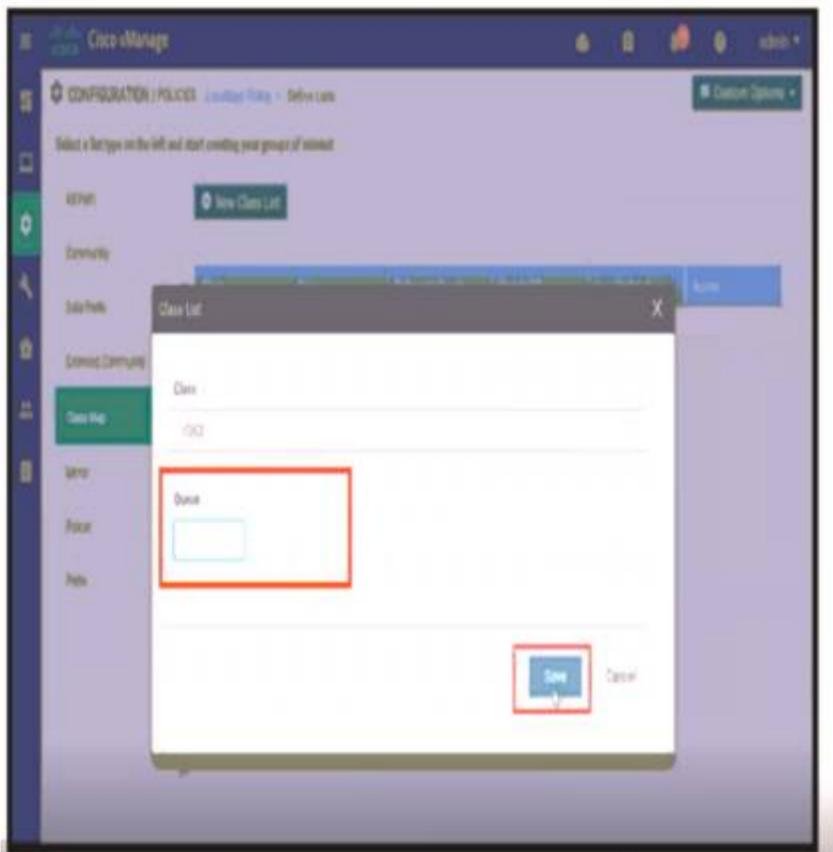

A network administrator is setting the queueing value for voice traffic for one of the WAN Edge routers using vManager GUI. Which queue value must be set to accomplish this task?

- A. 1
- B. 2
- C. 3

Answer: A

NEW QUESTION 7

How many subnets are necessary in Azure VNet for a WAN Edge device to function in the cloud deployment?

- A. CSR is the WAN Edge device that is supported in the Microsoft cloud
- B. The Microsoft underlay cloud fabric performs the management function.
- C. There must be three subnets in VNet: management, public, and services.
- D. One public subnet is required in VNet
- E. The Microsoft underlay cloud fabric performs all of the routing functions for WAN Edge.
- F. Public and services subnets are required in VNet
- G. The Microsoft underlay cloud fabric performs the management function.

Answer: D

NEW QUESTION 8

What are the two protocols redistributed into OMP? (Choose two.)

- A. OSPF
- B. RIP
- C. LDP
- D. RSVP
- E. EIGRP

Answer: AE

Explanation:

Supported Protocols


This section explains the protocols supported for unicast routing.

- [OMP Routing Protocol](#)
- [BGP and OSPF Routing Protocols](#)
- [OSPFv3](#)
- [EIGRP](#)

<https://www.cisco.com/c/en/us/td/docs/routers/sdwan/configuration/routing/ios-xe-17/routing-book-xe/m-unicas>

NEW QUESTION 9

Refer to the exhibit.

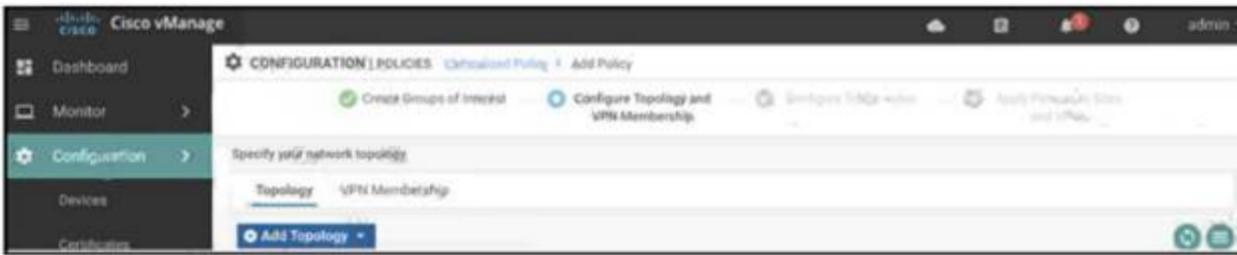

An administrator is configuring a policy in addition to an existing hub-and-spoke policy for two sites that should directly communicate with each other. How is this policy configured?

- A. hub-and-spoke
- B. mesh
- C. import existing topology
- D. custom control (route and TLOC)

Answer: D

Explanation:

<https://www.cisco.com/c/en/us/td/docs/routers/sdwan/configuration/policies/vedge/policies-book/controlpolicies>

NEW QUESTION 10

Which two different states of a WAN Edge certificate are shown on vManage? (Choose two.)

- A. inactive
- B. active
- C. staging
- D. invalid
- E. provisioned

Answer: BE

NEW QUESTION 10

An engineer must apply the configuration for certificate installation to vBond Orchestrator and vSmart Controller. Which configuration accomplishes this task?

- vpn 512
 interface eth1
 ip address 199.1.1.1/28
 tunnel-interface
 allow-service netconf
 no allow-service ntp
 no allow-service stun
- vpn 0
 interface eth1
 ip address 199.1.1.1/28
 tunnel-interface
 allow-service sshd
 allow-service ntp
- vpn 512
 interface eth1
 ip address 199.1.1.1/28
 tunnel-interface
 allow-service sshd
 allow-service netconf
- vpn 0
 interface eth1
 ip address 199.1.1.1/28
 tunnel-interface
 allow-service sshd
 allow-service netconf
 no shutdown

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: D

NEW QUESTION 11

An engineer wants to change the configuration of the certificate authorization mode from manual to automated. Which GUI selection will accomplish this?

- A. Maintenance > Security
- B. Configuration > Certificates
- C. Administration > Settings
- D. Tools > Operational Commands

Answer: C

Explanation:

Runbook to Request and Install Cisco PKI Certificates

1. Verify that you have satisfied the prerequisites and that you have added the Smart Account credentials.
2. Navigate to **Administration** ▶ **Settings** ▶ Controller Certificate Authorization and press Edit.
3. Select the **radio button Cisco Automated** (Recommended).

NEW QUESTION 13

An engineer is configuring a shaping rate of 1 Mbps on the WAN link of a WAN Edge router Which configuration accomplishes this task'?


- vpn vpn-id
interface interface-name
shaping-rate 1000000
- vpn vpn-id
interface interface-name
shaping-rate 1000
- interface interface-name
vpn vpn-id
shaping-rate 1000000
- interface interface-name
vpn vpn-id
shaping-rate 1000

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: B

NEW QUESTION 17

Refer to the exhibit.

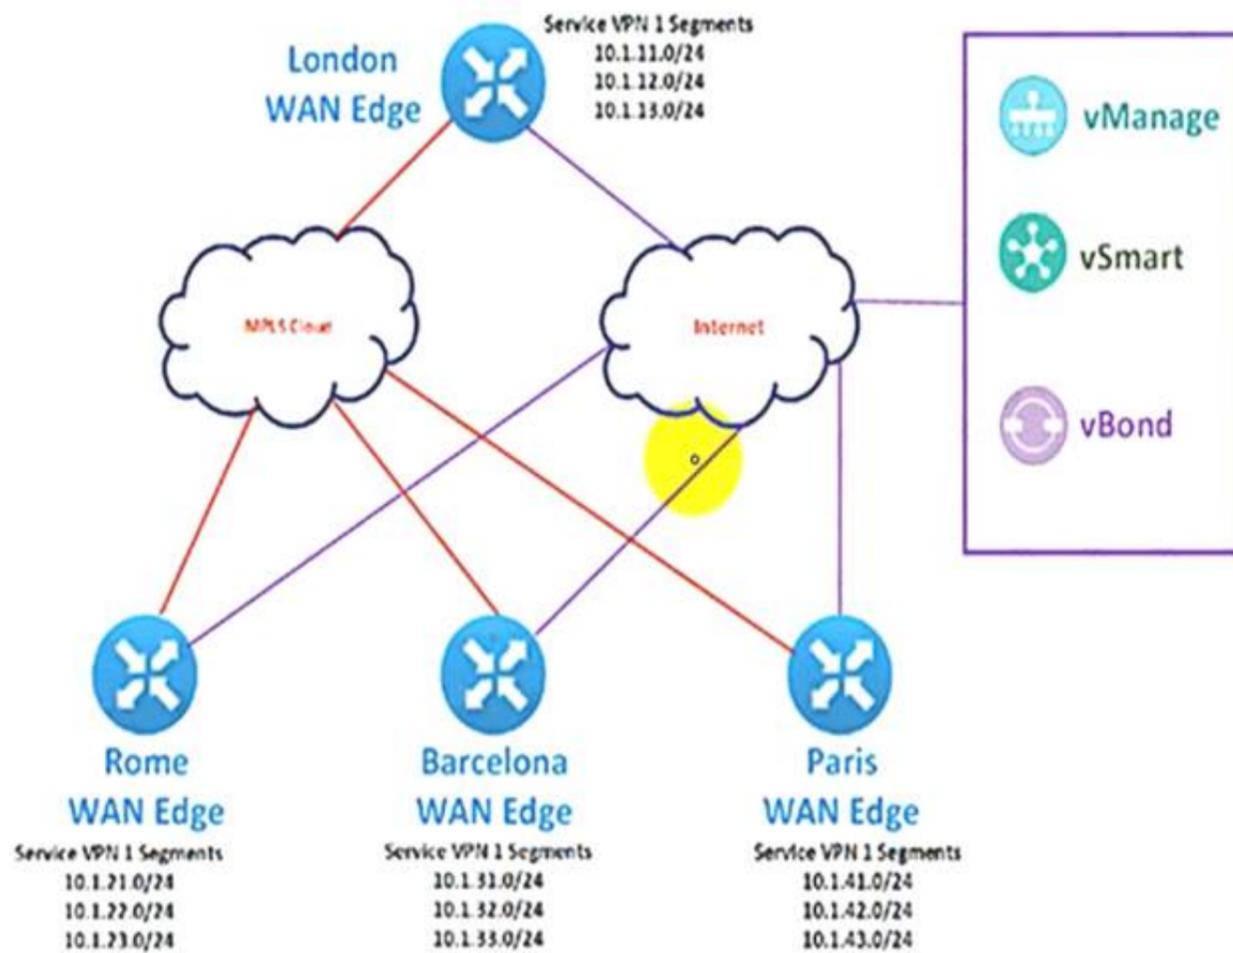

The Cisco SD-WAN network is configured with a default full-mesh topology. An engineer wants Paris WAN Edge to use the Internet HOC as the preferred TLOC for MSN Messenger and AOL Messenger traffic. Which policy achieves this goal?

A)



B)



C)



D)



- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: A

NEW QUESTION 19

An organization requires the use of integrated preventative engines, exploit protection, and the most updated and advanced signature-based antivirus with sandboxing and threat intelligence to stop malicious attachments before they reach users and get executed. Which Cisco SD-WAN solution meets the requirements?

- A. Cisco Trust Anchor module
- B. URL filtering and Umbrella DNS security
- C. Cisco AMP and Threat Grid
- D. Snort IPS

Answer: D

NEW QUESTION 21

A network administrator is configuring VRRP to avoid a traffic black hole when the transport side of the network is down on the master device. What must be configured to get the fastest failover to standby?

- A. lower timer interval
- B. prefix-list tracking
- C. higher group ID number
- D. OMP tracking

Answer: B

Explanation:

```
vEdge(config-vrrp)# track-prefix-list list-name
```

If all OMP sessions are lost, VRRP failover occurs as described for the track-omp option. In addition, if reachability to all the prefixes in the list is lost, VRRP failover occurs immediately, without waiting for the OMP hold timer to expire, thus minimizing the amount of overlay traffic is dropped while the vEdge routers determine the VRRP master.

NEW QUESTION 23

Which policy tracks path characteristics such as loss, latency, and jitter in vManage?

- A. VPN
- B. control
- C. app-route
- D. data

Answer: C

Explanation:

<https://www.cisco.com/c/en/us/td/docs/routers/sdwan/configuration/policies/ios-xe-17/policies-book-xe/applicat>

NEW QUESTION 25

Which feature delivers traffic to the Cisco Umbrella SIG cloud from a Cisco SD-WAN domain?

- A. L2TPv3 tunnel
- B. IPsec tunnel
- C. local umbrella agent
- D. source NAT

Answer: B

NEW QUESTION 30

When VPNs are grouped to create destination zone in Zone-Based Firewall, how many zones can a single VPN be part of?

- A. two
- B. four
- C. one
- D. three

Answer: C

NEW QUESTION 32

Which protocol advertises WAN edge routes on the service side?

- A. EIGRP
- B. OSPF
- C. BGP
- D. ISIS

Answer: B

NEW QUESTION 36

Which device information is required on PNP/ZTP to support the zero-touch onboarding process?

- A. interface IP address
- B. system IP address
- C. public DNS entry
- D. serial and chassis numbers

Answer: D

NEW QUESTION 41

Refer to the exhibit

```
vManage#show control local-properties
personality                vmanage
sp-organization-name       Cisco
organization-name         Cisco
system-ip                  10.1.1.10
root-ca-chain-status       Installed
certificate-status         Installed
```

A vBond controller was added to the controller list with the same Enterprise Root CA certificate as vManage. The two controllers can reach each other via VPNO and share the same organization name, but the control connection is not initiated- Which action resolves the issue?


- A. Synchronize the WAN Edge list on vManage with controllers.
- B. Configure NTP on both controllers to establish a connection.
- C. Configure a valid system IP on the vBond controller.
- D. Configure a valid vBond IP on vManage.

Answer: D

NEW QUESTION 45

Which configuration defines the groups of interest before creation of the access list or route map?


A)

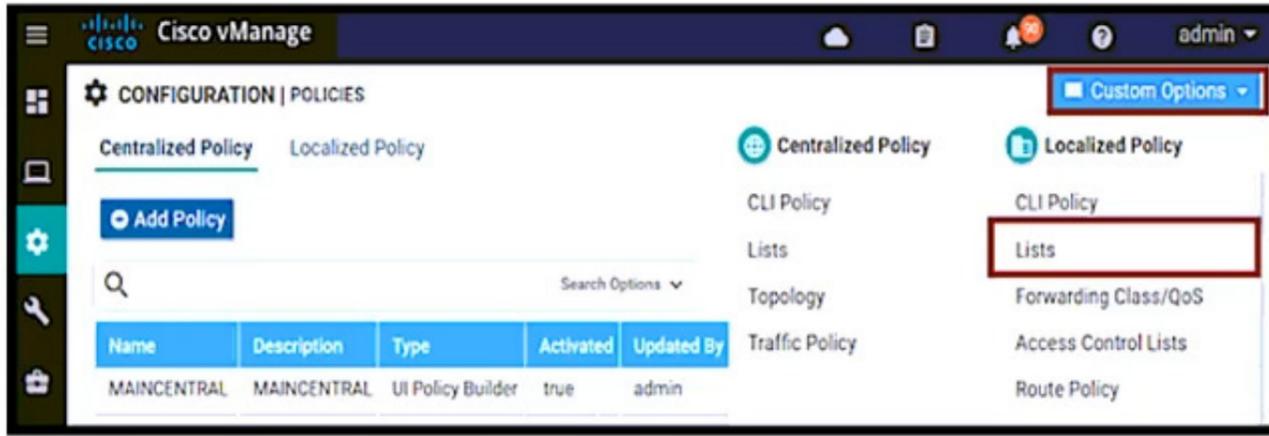


B)



C)

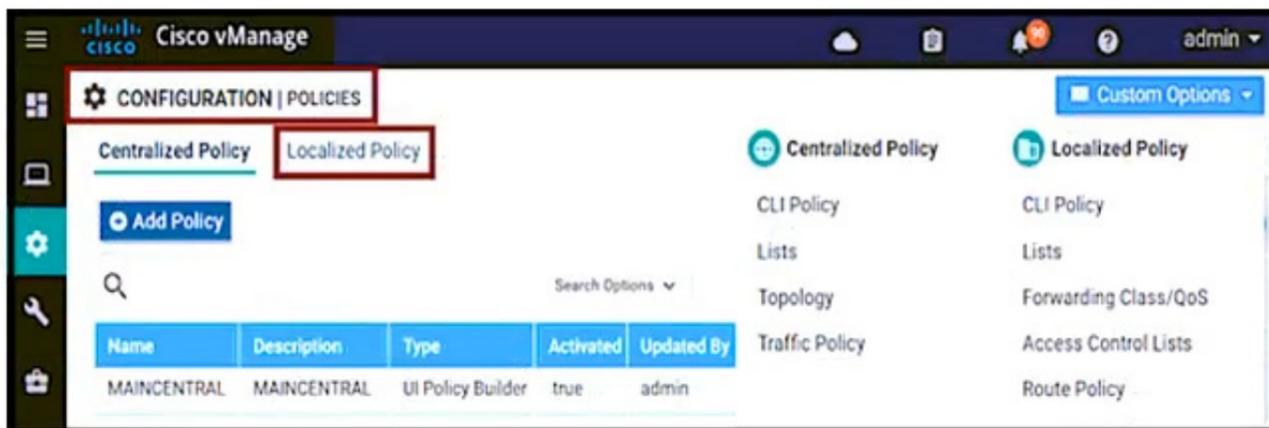

D.

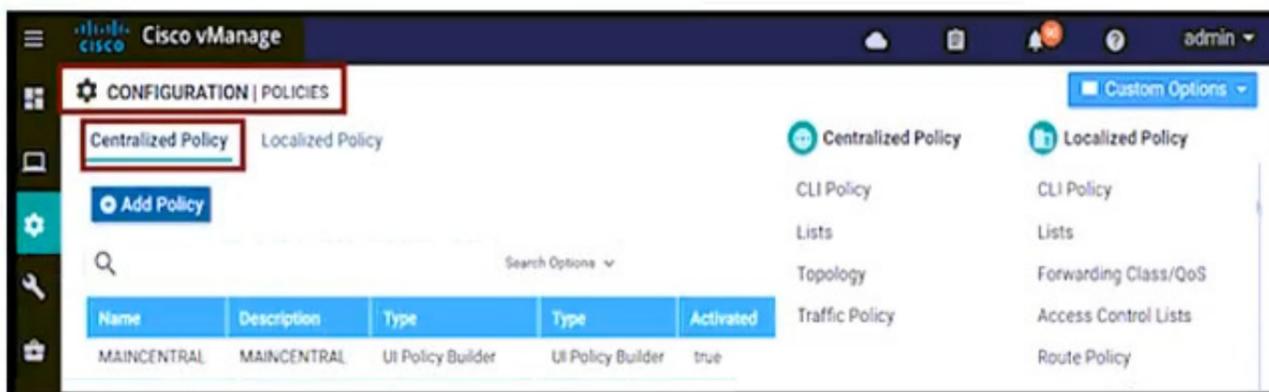

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: A

NEW QUESTION 50

Which attributes are configured to uniquely Identify and represent a TLOC route?

- A. system IP address, link color, and encapsulation
- B. firewall, IPS, and application optimization
- C. site ID, tag, and VPN
- D. origin, originator, and preference

Answer: A

Explanation:

<https://www.cisco.com/c/dam/en/us/td/docs/solutions/CVD/SDWAN/CVD-SD-WAN-Design-2018OCT.pdf>

NEW QUESTION 54

A bank is looking for improved customer experience for applications and reduce overhead related to compliance and security. Which key feature or features of the Cisco SD-WAN solution will help the bank to achieve their goals?

- A. Integration with PaaS providers to offer the best possible application experience
- B. QoS including application prioritization and meeting critical applications SLA for selecting optimal path.
- C. implementation of a modern age core banking system
- D. implementation of BGP across the enterprise routing for selecting optimal path

Answer: B

Explanation:

<https://www.cisco.com/c/dam/en/us/solutions/collateral/enterprise-networks/sd-wan/nb-06-cisco-sd-wan-ebook->

NEW QUESTION 55

Refer to the exhibit

Controller Type	Hostname	System IP	Expiration Date	uuid	Operation Status	Site ID	Certificate Serial
vBond	vbond	10.1.1.103	14 Jun 2021 3:49:50 PM +04	f1d800	Installed	1	615DBF69000000000005
vSmart	-	-	-	12aa1...	CSR Generated	-	No certificate installed
vManage	vManage1	10.1.1.101	14 Jun 2021 2:17:34 PM +04	ca6-tf9	vBond Updated	1	61699683060000000002

vManage and vBond have an issue establishing a connection to vSmart Which two actions does the administrator take to fix the issue? (Choose two)
 Install the certificate received from the certificate server.

- A. Manually resync vManage and vBond
- B. Reconfigure the vSmart from CLI with the proper Hostname & System IP
- C. Delete and re-add vSmart Click Generate and validate CSR
- D. Request a certificate from the certificate server based on the CSR for the vSmart

Answer: CD

NEW QUESTION 60

When redistribution is configured between OMP and BGP at two Data Center sites that have Direct Connection interlink, which step avoids learning the same routes on WAN Edge routers of the DCs from LAN?

- A. Define different VRFs on both DCs
- B. Set same overlay AS on both DC WAN Edge routers
- C. Set down-bit on Edge routers on DC1
- D. Set OMP admin distance lower than BGP admin distance

Answer: B


Explanation:

Typically, there are more than one datacenters for HA/redundancy requirements. After successful migration of the first datacenter, migrate the second datacenter in a similar method as explained in this section. Note that a routing loop can occur if there is a backdoor link between the datacenter sites and route advertisement is configured between the two datacenters. To avoid the loop, any of the three methods explained below can be used:

1. Use the same Autonomous System Numbers (ASN) on edge routers of the two datacenters. Because of the same ASN, the AS-PATH attribute will avoid learning the same prefixes on the edge routers that are advertised by the other datacenter towards the LAN side.
2. Use overlay-AS to insert Overlay Management Protocol (OMP) AS number when redistributing the routes from OMP into LAN side towards DC LAN. Configure all DC SD-WAN edge routers with the same overlay-as. This allows the edges to filter the routes advertised by the other DCs edge devices towards the LAN side and prevents redistributing the same routes back into OMP.
3. Use tags or communities to mark the prefixes at one datacenter when redistributing to DC LAN and filter on the edge of the other datacenter when learning advertisements from the LAN side.

NEW QUESTION 61

Refer to the exhibit.

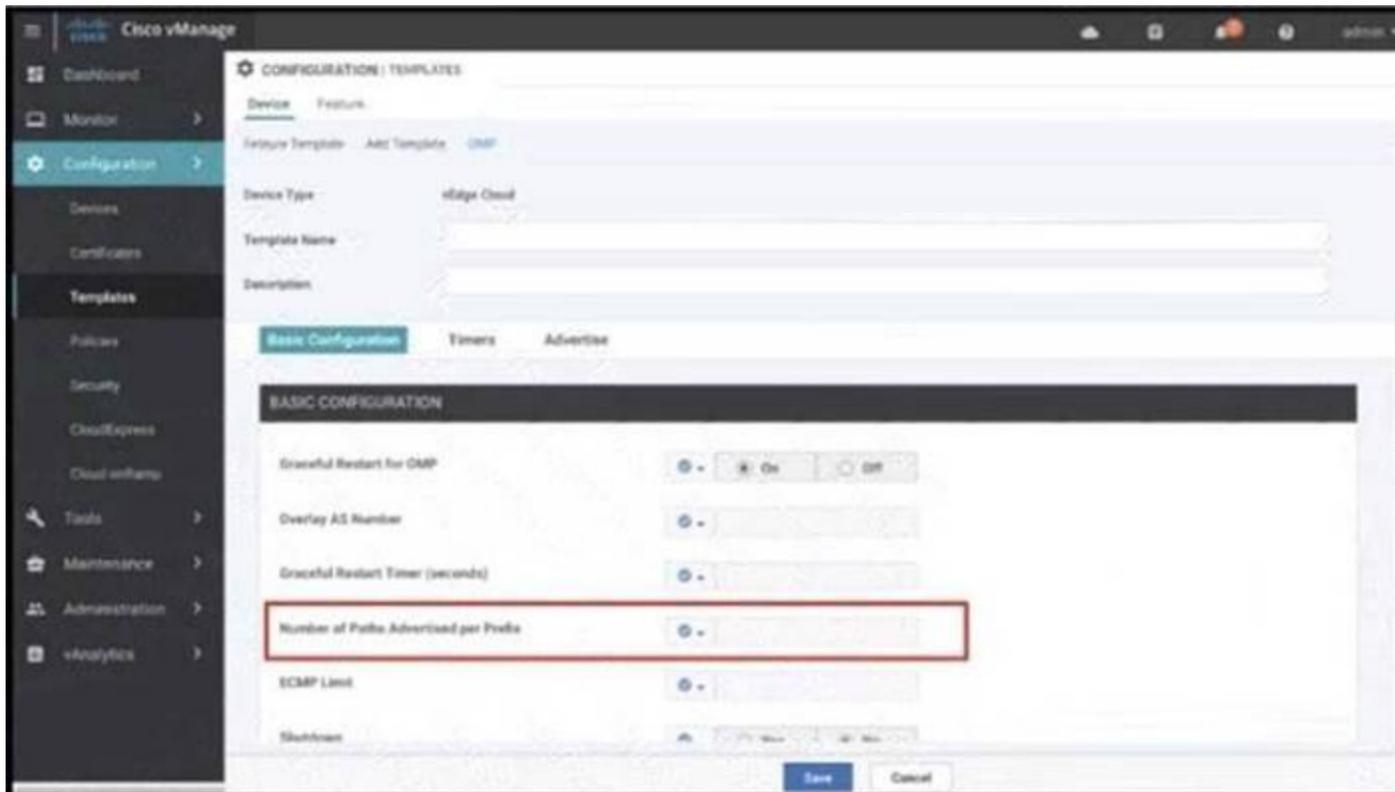

A network administrator is configuring OMP in vManage to advertise all the paths for the same prefix from a site that has two WAN Edge devices. Each WAN Edge device is connected to three ISPs and two private MPLS transports. What is the minimum value for "Number of Paths advertised per Prefix" that should be configured?

- A. 2
- B. 3
- C. 5
- D. 10

Answer: D

NEW QUESTION 65

What is an advantage of using auto mode versus static mode of power allocation when an access point is connected to a PoE switch port?

- A. It detects the device is a powered device
- B. All four pairs of the cable are used
- C. Power policing is enabled at the same time
- D. The default level is used for the access point

Answer: D

Explanation:

Use the **auto setting on any PoE port**. The **auto mode is the default setting**.

https://www.cisco.com/en/US/docs/switches/lan/catalyst3850/software/release/3.2_0_se/multibook/configuration

NEW QUESTION 66

How must the application-aware enterprise firewall policies be applied within the same WAN Edge router?

- A. within and between zones
- B. between two VPN tunnels
- C. within zone pair
- D. between two VRFs

Answer: C

NEW QUESTION 70

What is a default protocol for control plane connection?

- A. IPsec
- B. HTTPS
- C. TLS
- D. DTLS

Answer: D

NEW QUESTION 71

Refer to the exhibit.

```

policy
lists
!
tloc-list dc-preference-east
tloc 100.100.100.100 color mpls
encap ipsec preference 200
tloc 101.101.101.101 color mpls
encap ipsec preference 400
!
site-list sites-region-west
site-id 1-20
!
site-list sites-region-east
site-id 21-40
!
site-list dc-sites
site-id 100-101

control-policy adv-dc-preference-west
sequence 10
match route
site-list dc-sites
!
action accept
set
tloc-list dc-preference-east
!

!
default-action accept
!
control-policy adv-dc-preference-east
sequence 10
match route
site-list dc-sites
!
action accept
set
tloc-list dc-preference-east
!

!
default-action accept
!
apply-policy
site-list sites-region-west
control-policy adv-dc-preference-west
out
!
site-list sites-region-east
control-policy adv-dc-preference-east
out
!
!

```

A customer wants to implement primary and secondary Cisco SD-WAN overlay routing for prefixes that are advertised for both data centers. The east data center (TLOC 101.101.101.101) is primary for east sites, and the west data center (TLOC 100.100.100.100) is primary for west sites. Which configuration change achieves this objective?

A.

```

lists
tloc-list dc-preference-west
tloc 100.100.100.100 color mpls encap ipsec preference 400
tloc 101.101.101.101 color mpls encap ipsec preference 200

control-policy adv-dc-preference-west
sequence 10
match route
site-list dc-sites
!
action accept
set
tloc-list dc-preference-west
!
!
default-action accept

```

B.

```

lists
tloc-list dc-preference-west
tloc 100.100.100.100 color mpls encap ipsec preference 200
tloc 101.101.101.101 color mpls encap ipsec preference 400

control-policy adv-dc-preference-west
sequence 10
match route
site-list dc-sites
!
action accept
set
tloc-list dc-preference-west
!
!
default-action accept

```

C.

```

tloc-list dc-preference-east
tloc 100.100.100.100 color mpls encap ipsec preference 400
tloc 101.101.101.101 color mpls encap ipsec preference 200

```

D.

```

control-policy adv-dc-preference-west
sequence 10
match route
site-list dc-sites
!
action accept
set
tloc-list dc-preference-west
!
!
default-action accept

```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: A

NEW QUESTION 75

Which plane builds and maintains the network topology and makes decisions on traffic flows?

- A. orchestration
- B. management
- C. control
- D. data

Answer: C

NEW QUESTION 76

How is an event monitored and reported for an individual device in the overlay network at site ID:S4300T6E43F36?

- A. The device sends event notifications to vManage.
- B. The device sends notifications to vSmart that sends them to vManage.
- C. The device sends a critical alarm of events to vManage.
- D. The device sends a critical alarm to vSmart that sends it to vManage.

Answer: A

NEW QUESTION 77

An engineer is adding a tenant with location JD 306432373 in vManage. What is the maximum number of alphanumeric characters that are accepted in the tenant name field?

- A. 64
- B. 128
- C. 256
- D. 8

Answer: B

Explanation:

In the Add Tenant window:

1. Enter a name for the tenant. It can be up to 128 characters and can contain only alphanumeric characters.

NEW QUESTION 81

An engineer must apply the configuration for certificate installation to vBond Orchestrator and vSmart Controller. Which configuration accomplishes this task?

- A.

```
vpn 0
interface eth1
ip address 199.1.1.1/28
tunnel-interface
allow-service sshd
allow-service netconf
no shutdown
```
- B.

```
vpn 512
interface eth1
ip address 199.1.1.1/28
tunnel-interface
allow-service sshd
allow-service netconf
```
- C.

```
vpn 0
interface eth1
ip address 199.1.1.1/28
tunnel-interface
allow-service sshd
allow-service ntp
```
- D.

```
vpn 512
interface eth1
ip address 199.1.1.1/28
tunnel-interface
allow-service netconf
no allow-service ntp
no allow-service stun
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: A

NEW QUESTION 85

What is the maximum number of IPsec that are temporarily created and converged on a new set of IPsec SAs in the pairwise keys process during a simultaneous rekey?


- A. 2
- B. 4
- C. 6
- D. 8

Answer: B


NEW QUESTION 90

The Cisco SD-WAN engineer is configuring service chaining for a next-generation firewall located at the headquarters. Which configuration creates the service?


A)

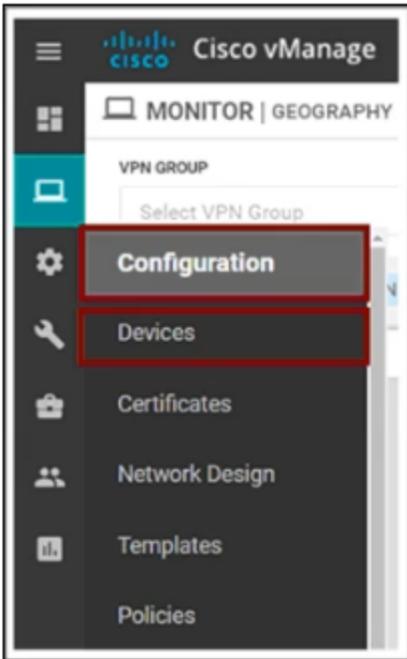


B)

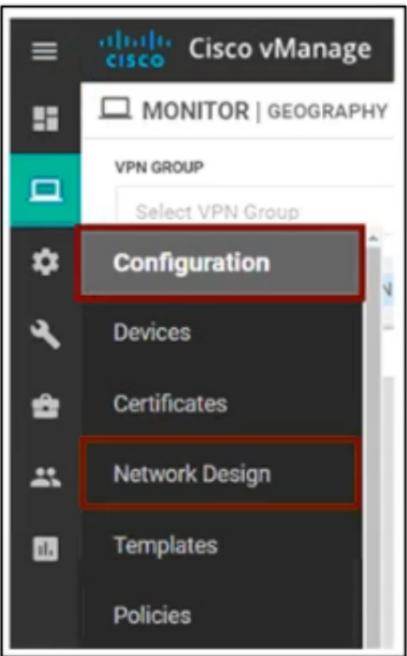

C)

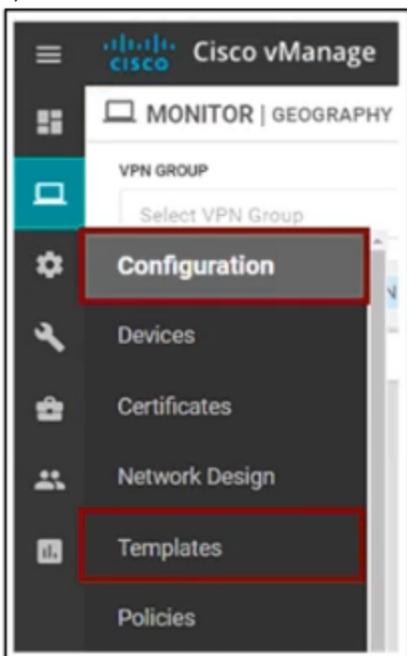

D)

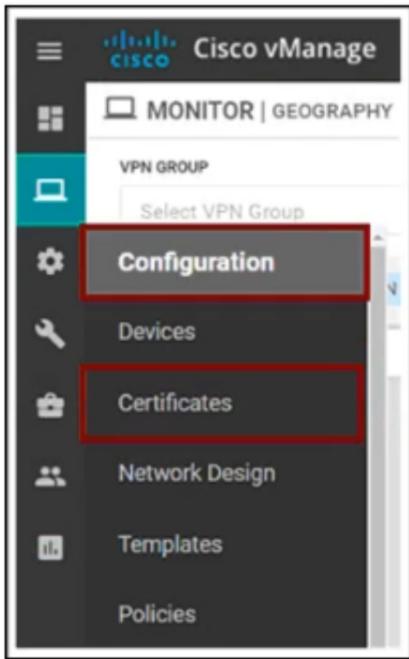

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: C

NEW QUESTION 93

Which two WAN Edge devices should be deployed in a cloud? (Choose two.)

- A. vEdge 5000v
- B. ASR 1000v
- C. CSR 1000v
- D. vEdge 100wm
- E. vEdge cloud

Answer: CE

Explanation:

2. Virtual platforms

- Cloud Services Router (CSR) 1000v running IOS XE SD-WAN Software
- vEdge Cloud Router running Viptela OS

NEW QUESTION 94

An engineer is configuring a data policy for packets that must be captured through the policy. Which command accomplishes this task?

- A. policy > data-policy > vpn-list > sequence > default-action > drop
- B. policy > data-policy > vpn-list > sequence > action
- C. policy > data-policy > vpn-list > sequence > default-action > accept
- D. policy > data-policy > vpn-list > sequence > match

Answer: B

Explanation:

<https://www.cisco.com/c/dam/en/us/td/docs/routers/sdwan/configuration/config-18-4.pdf#page=357>

NEW QUESTION 95

A customer has MPLS and Internet as the TLOC colors. An engineer must configure controllers with the Internet and not with MPLS. Which configuration achieves this requirement on vManage?

- A)


```
vpn 0
interface eth1
ip address 10.50.0.1/24
tunnel-interface
color mpls
```
- B)


```
vpn 0
interface eth1
ip address 10.50.0.1/24
tunnel-interface
color public-internet
```
- C)

```
vpn 0
interface eth1
ip address 10.50.0.1/24
tunnel-interface
color biz-internet
```

D)

```
vpn 0
interface eth1
ip address 10.50.0.1/24
tunnel-interface
color default
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: B

NEW QUESTION 100

What must an engineer consider when deploying an SD-WAN on-premises architecture based on ESXi hypervisor?

- A. Cisco must provision the backup and snapshots platform for the SD-WAN architecture
- B. The managed service provider must provision controllers with their appropriate certificates
- C. The IT team is required to provision the SD-WAN controllers and is responsible for backups and disaster recovery implementation
- D. The IT team will be given access by Cisco to a vManage for configuration templates and policies

Answer: C

NEW QUESTION 102

Which table is used by the vSmart controller to maintain service routes of the WAN Edge routers in the hub and local branches?

- A. RIB
- B. FIB
- C. OMP
- D. TLOC

Answer: C

NEW QUESTION 107

What is the default value for the Multiplier field of the BFD basic configuration in vManage?

- A. 3
- B. 4
- C. 5
- D. 6

Answer: D

NEW QUESTION 108

What is the purpose of "vpn 0" in the configuration template when onboarding a WAN edge node?

- A. It carries control traffic over secure DTLS or TLS connections between vSmart controllers and vEdge routers, and between vSmart and vBond
- B. It carries control out-of-band network management traffic among the Viptela devices in the overlay network.
- C. It carries control traffic over secure IPsec connections between vSmart controllers and vEdge routers, and between vSmart and vManager
- D. It carries control traffic over secure IPsec connections between vSmart controllers and vEdge routers, and between vSmart and vBond

Answer: A

Explanation:

- VPN 0 is the transport VPN. It carries control traffic over secure DTLS or TLS connections between vSmart controllers and vEdge routers, and between vSmart controllers and vBond orchestrators. Initially, VPN 0 contains all a device's interfaces except for the management interface, and all the interfaces are disabled. For the control plane to establish itself so that the overlay network can function, you must configure WAN transport interfaces in VPN 0.

NEW QUESTION 112

Which encryption algorithm is used for encrypting SD-WAN data plane traffic?

- A. Triple DES
- B. IPsec
- C. AES-128
- D. AES-256 GCM

Answer: D

NEW QUESTION 114

A network administrator is configuring QoS on a vEdge 5000 router and needs to enable it on the transport side interface. Which policy setting must be selected to accomplish this goal?

- A. Cloud QoS Service side
- B. Cloud QoS
- C. NetFlow
- D. Application

Answer: B

Explanation:

9. Since the DC routers are vEdge 5000s, select the **Cloud QoS** checkbox to enable QoS on the transport side.

NEW QUESTION 118

Which VPN connects the transport-side WAN Edge interface to the underlay/WAN network?

- A. VPN 1
- B. VPN 511
- C. VPN 0
- D. VPN 512

Answer: C

Explanation:

transport network and the transport network itself. The network ports that **connect to the underlay network** are part of **VPN 0**, the transport VPN. Getting connectivity to the Service Provider gateway in the transport network usually involves configuring a static default gateway (most

NEW QUESTION 119

Refer to the exhibit.

```
vEdge-Cloud#
vEdge-Cloud#
vEdge-Cloud# vshell
vEdge-Cloud:~$ cd /var/log/
vEdge-Cloud:/var/log$
vEdge-Cloud:/var/log$ ls -l
total 28992
-rw-r--r-- 1 root root 1441700 Nov 22 15:13 auth.log
-rw-r--r-- 1 basic adm 0 Aug 7 15:29 cloud-init.log
drwxr-xr-x 2 root root 4096 Nov 22 14:49 confd
-rw-r--r-- 1 root root 1896486 Nov 22 14:57 kern.log
-rw-r--r-- 1 root root 292292 Aug 9 22:31 lastlog
-rw-r--r-- 1 root root 6197843 Nov 22 15:14 messages
-rw-r--r-- 1 root root 10512141 Aug 30 21:00 messages.1
drwxr-xr-x 2 root root 4096 Nov 22 14:48 pdb
drwxr-xr-x 2 quagga quagga 4096 Aug 7 15:29 quagga
-rw-r--r-- 1 root root 437 Nov 22 14:48 sw_script_active.log
-rw-r--r-- 1 root root 382 Nov 22 14:48 sw_script_previous.log
-rw-r--r-- 1 root root 2004 Nov 22 14:49 sw_script_syncddb.log
-rw----- 1 root root 64064 Nov 22 15:07 tallylog
drwxr-xr-x 2 root root 60 Nov 22 14:48 tmplog
-rw-r--r-- 1 root root 6841506 Nov 22 15:14 vconfd
-rw-r--r-- 1 root root 184602 Aug 7 15:29 vdebug
-rw-r--r-- 1 root root 2479511 Nov 22 15:14 vsyslog
-rwxr-xr-x 1 root utmp 49536 Nov 22 15:07 wtmp
vEdge-Cloud:/var/log$
vEdge-Cloud:/var/log$
```

Which configuration stops Netconf CLI logging on WAN Edge devices during migration?

- logs
 - audit-disable
 - netconf-disable
- logs
 - netconf-disable
- logging
 - disk netconf-disable
- logging
 - disk
 - audit-disable
 - netconf-disable

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: B

Explanation:

<https://www.cisco.com/c/en/us/td/docs/routers/sdwan/command/sdwan-cr-book/config-cmd.html#wp386725031>

Syslog messages related to AAA authentication and Netconf CLI access and usage are placed in the auth.log and messages files. Each time Cisco vManage logs in to a Cisco vEdge device to retrieve statistics and status information and to push files to the router, the router generates AAA and Netconf log messages. So, over time, these messages can fill the log files. To prevent these messages from filling the log files, you can disable the logging of AAA and Netconf syslog messages:

```
Device(config)# system aaa logsViptela(config-logs)# audit-disableViptela(config-logs)# netconf-disable
```

NEW QUESTION 120

Which value is verified in the certificates to confirm the identity of the physical WAN Edge device?

- A. Serial Number
- B. OTP
- C. System-IP
- D. Chassis-ID

Answer: A

Explanation:

<https://www.cisco.com/c/en/us/td/docs/routers/sdwan/configuration/sdwan-xe-gs-book/manage-certificates.html>

NEW QUESTION 121

Which vBond system configuration under VPN 0 allows for a routable public IP address even if the DNS name, hostname, or IP address of the vBond orchestrator are omitted?

- A. local
- B. vbond-only
- C. dns-name
- D. WAN

Answer: A

NEW QUESTION 122

Which command disables the logging of syslog messages to the local disk?

- A. no system logging disk enable
- B. no system logging disk local
- C. system logging disk disable
- D. system logging server remote

Answer: A

NEW QUESTION 123

At which layer does the application-aware firewall block applications on a WAN Edge?

- A. 3
- B. 7
- C. 5
- D. 2

Answer: B

NEW QUESTION 124

Which protocol runs between the vSmart controllers and WAN Edge routers when the vSmart controller acts like a route reflector?

- A. OMP outside the DTLS/TLS control connection
- B. BGP inside the DTLS/TLS
- C. IPsec inside the DTLS/TLS control connection
- D. OMP inside the DTLS/TLS control connection

Answer: D

NEW QUESTION 126

When a WAN Edge device joins the SD-WAN overlay, which Cisco SD-WAN components orchestrates the connection between the WAN Edge device and a vSmart controller?

- A. vManage
- B. vBond
- C. OMP
- D. APIC-EM

Answer: B

Explanation:

When a vEdge device comes up, how does it automatically discover Cisco vManage and Cisco vSmart Controller and establish connections with them? **It does so with help from Cisco vBond Orchestrator.**

NEW QUESTION 130

Which component of the Cisco SD-WAN control plane architecture facilitates the storage of certificates and configurations for network components?

- A. vSmart
- B. vBond
- C. WAN Edge
- D. vManage

Answer: D

NEW QUESTION 135

Drag and drop the REST API calls from the left onto the functions on the right.

PUT	Retrieve or read.
GET	Update an object.
POST	Create an object.
DELETE	Remove an object.

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

- **GET:** Get resource from the server.
- **POST:** Create resource to the server.
- **PATCH or PUT:** Update existing resource on the server.
- **DELETE:** Delete existing resource from the server.

NEW QUESTION 138

What is a benefit of using REST APIs?

- A. predefined automation and orchestration platform for event management and logging
- B. user-defined automation and integration into other orchestration systems or tools
- C. vAnalytics to simplify operational services integration and real-time event monitoring
- D. predefined SD-WAN controller with other platform integration for event management and logging

Answer: B

NEW QUESTION 141

Which two performance data details are provided by Cisco SO-WAN vAnalytics? (Choose two)

- A. jitter loss and latency for data tunnels
- B. application quality of experience score from zero to ten
- C. detail on total cost of ownership for the fabric
- D. certificate authority status (health and expiration dates) for all controllers
- E. view devices connected to a vManage NMS

Answer: AB

NEW QUESTION 142

Which two prerequisites must be met before the Cloud onRamp for IaaS is initiated on vManage to expand to the AWS cloud? (Choose two)

- A. Attach the *AmazonCreateVPC* and "Amazon Provision EC2" permission policy to the IAM account
- B. Subscribe to the SD-WAN Edge router AMI in the AWS account
- C. Attach an OSPF feature template to the AWS cloud Edge router template
- D. Attach a device template to the cloud WAN Edge router to be deployed in the AWS
- E. Preprovision the transit VPC in the AWS region

Answer: BD

Explanation:

The pre-requisites include verifying you meet the AWS prerequisites, including the necessary AWS credentials and subscriptions to the Amazon Machine Image (AMI) instances for Cisco SD-WAN Edge routers (Cisco CSR 1000v virtual routers or Cisco vEdge Cloud); verifying you have available tokens/licenses for at least two additional Cisco SD-WAN Edge Routers within Cisco vManage; and configuring and deploying device templates for the Cisco SD-WAN Edge routers that will be used within the transit VPCs.

Note that the creation of the customer host VPCs, shown in the figure above, is outside the scope of this document. It is assumed that one or more customer host VPCs have already been created.

https://www.cisco.com/c/en/us/td/docs/solutions/CVD/SDWAN/Cisco_Cloud_onRamp_for_IaaS_AWS_Versio

NEW QUESTION 146

A vEdge platform is sending VRRP advertisement messages every 10 seconds. Which value configures the router back to the default timer?


- A. 2 seconds
- B. 3 seconds
- C. 1 second
- D. 5 seconds

Answer: C


NEW QUESTION 151

An engineer must create a QoS policy by creating a class map and assigning it to the LLQ queue on a WAN Edge router Which configuration accomplishes the task?


A)

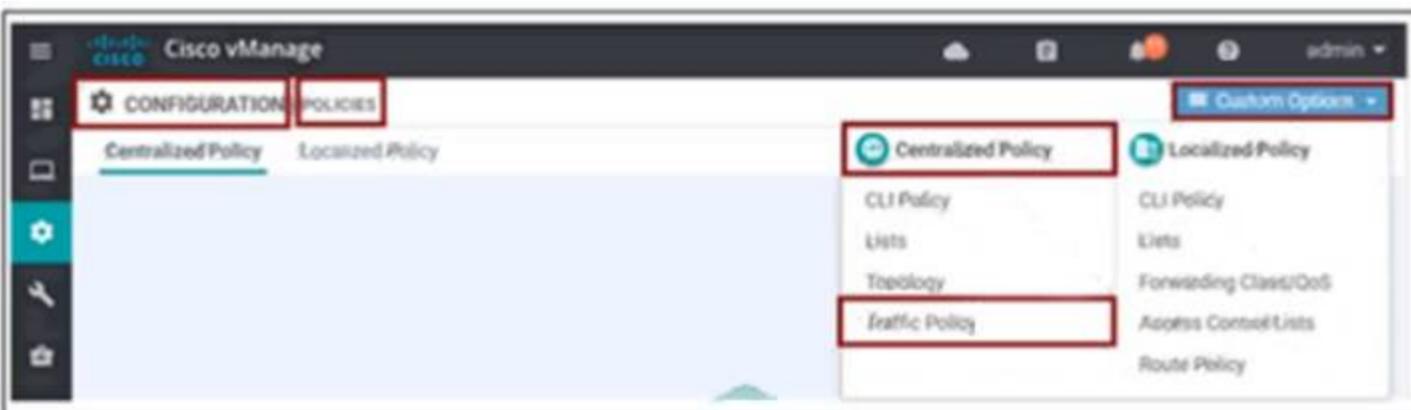


B)

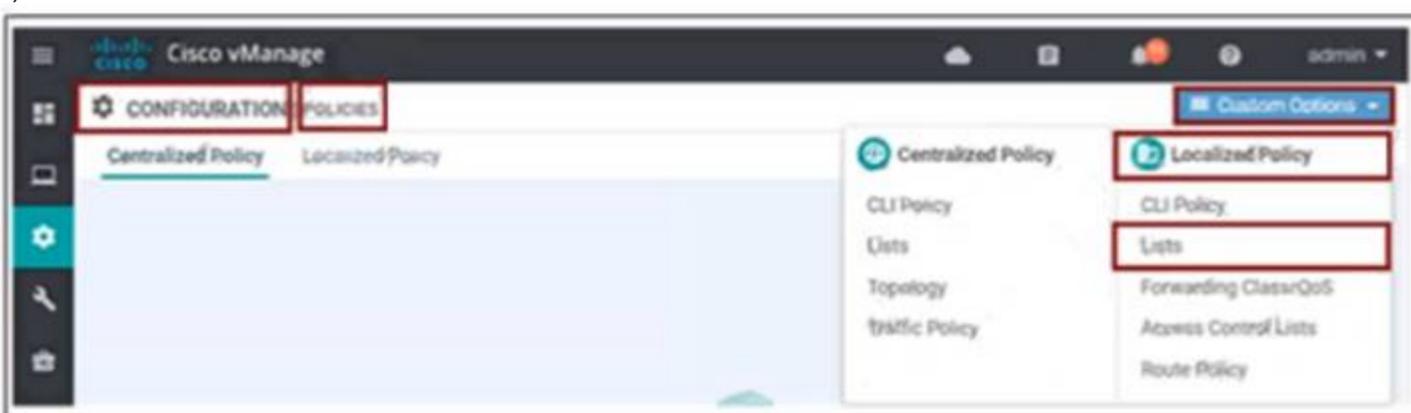

C)

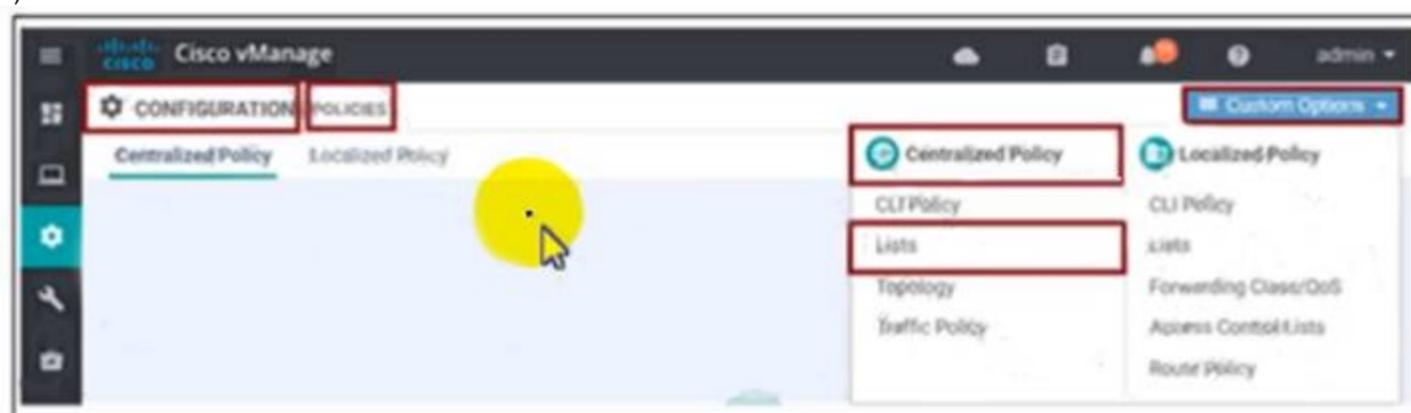

D)

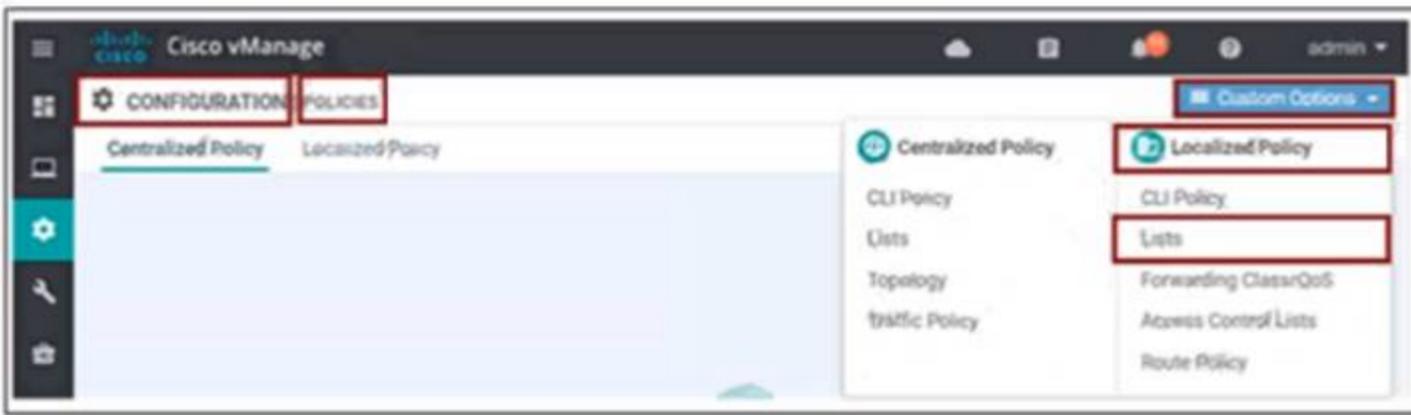

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: D

NEW QUESTION 155

Which protocol is configured on tunnels by default to detect loss, latency, jitter, and path failures in Cisco SD-WAN?

- A. TLS
- B. BFD
- C. OMP
- D. BGP

Answer: B

NEW QUESTION 160

How is the software managed in Cisco SD-WAN?

- A. Software images must be uploaded to vManage through HTTP or FTP
- B. Software downgrades are unsupported for vManage
- C. Software images must be transferred through VPN 512 or VPN 0 of vManage
- D. Software upgrade operation in the group must include vManag
- E. vBond, and vSmart.

Answer: A

NEW QUESTION 163

A policy is created to influence routing path in the network using a group of prefixes. What policy application will achieve this goal when applied to a site List?

- A. vpn-membership policy
- B. cflowd-template
- C. app-route policy
- D. control-policy

Answer: D

NEW QUESTION 168

How does the replicator role function in cisco SD-WAN?

- A. WAN Edge devices advertise the rendezvous point to all the receivers through the underlay network.
- B. vSmart Controllers advertise the rendezvous point to all the receivers through the overlay network.
- C. WAN Edge devices advertise the rendezvous point to all receivers through the overlay network.
- D. vSmart Controllers advertise the rendezvous point to all the receivers through the underlay network.

Answer: B

Explanation:

Replicators

For efficient use of WAN bandwidth, strategic Cisco SD-WAN routers can be deployed and configured as replicators throughout the overlay network. Replicators mitigate the requirement for a Cisco SD-WAN router with local sources or the PIM-RP to replicate a multicast stream once for each receiver. As discussed above, replicators advertise themselves, using OMP multicast-autodiscover routes, to the Cisco vSmart Controllers in the overlay network. The controllers then forward the replicator location information to the PIM-enabled Cisco IOS XE SD-WAN routers that are in the same VPN as the replicator.

NEW QUESTION 171


What are two attributes of vRoute? (Choose two)

- A. originator
- B. service
- C. encapsulation
- D. carrier
- E. domain ID

Answer: AB

NEW QUESTION 174

Refer to the exhibit

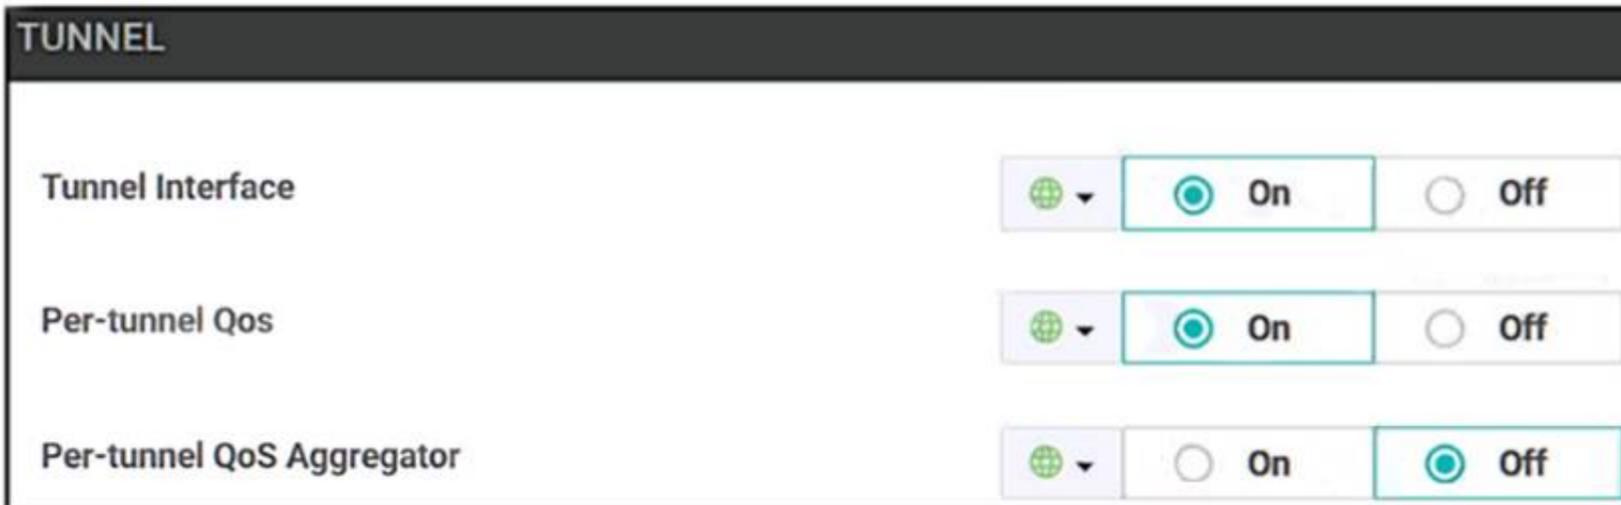

A user has selected the options while configuring a VPN Interface Ethernet feature template. What is the required configuration parameter the user must set in this template for this feature to function?

- A. The "IP MTU" field must be increased from the default value of 1500 to support the additional overhead.
- B. The "Shaping Rate (Kbps)" field must be configured with a value
- C. The "Adaptive QoS" field must be set to "on"
- D. The "Bandwidth Downstream" field must be configured with a value

Answer: B

NEW QUESTION 179

An engineer must deploy a QoS policy with these requirements:

- policy name: App-police
- police rate: 1000000
- burst: 1000000
- exceed: drop

Which configuration meets the requirements?

- A.

```
vpn-list VPN10
sequence 1
match
app-list youtube
action accept
set
policer App-police
```
- B.

```
policy
data-policy policy-name
vpn-list 10
sequence 1
action accept
set
policer App-police
```
- C.

```
vpn 10
interface ge0/0/0
set
policer App-police in
default action accept
```
- D.

```
policy
action accept
set
policer App-police
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: B

NEW QUESTION 180

Which actions must be taken to allow certain departments to require firewall protection when interacting with data center network without including other departments? (Choose two.)

- A. Use classification policing and marking
- B. Apply data policies at vEdge.
- C. Deploy a service-chained firewall service per VPN
- D. The regional hub advertises the availability of the firewall service

E. Advertise lo vSmart controllers

Answer: CD

NEW QUESTION 184

Which two criteria are supported to filter traffic on a Cisco Umbrella Cloud-delivered firewall? (Choose two)

- A. tunnels
- B. site ID
- C. URL
- D. geolocation
- E. protocol


Answer: AE

Explanation:

<https://docs.umbrella.com/umbrella-user-guide/docs/add-a-firewall-policy>

NEW QUESTION 186

Refer to the exhibit.

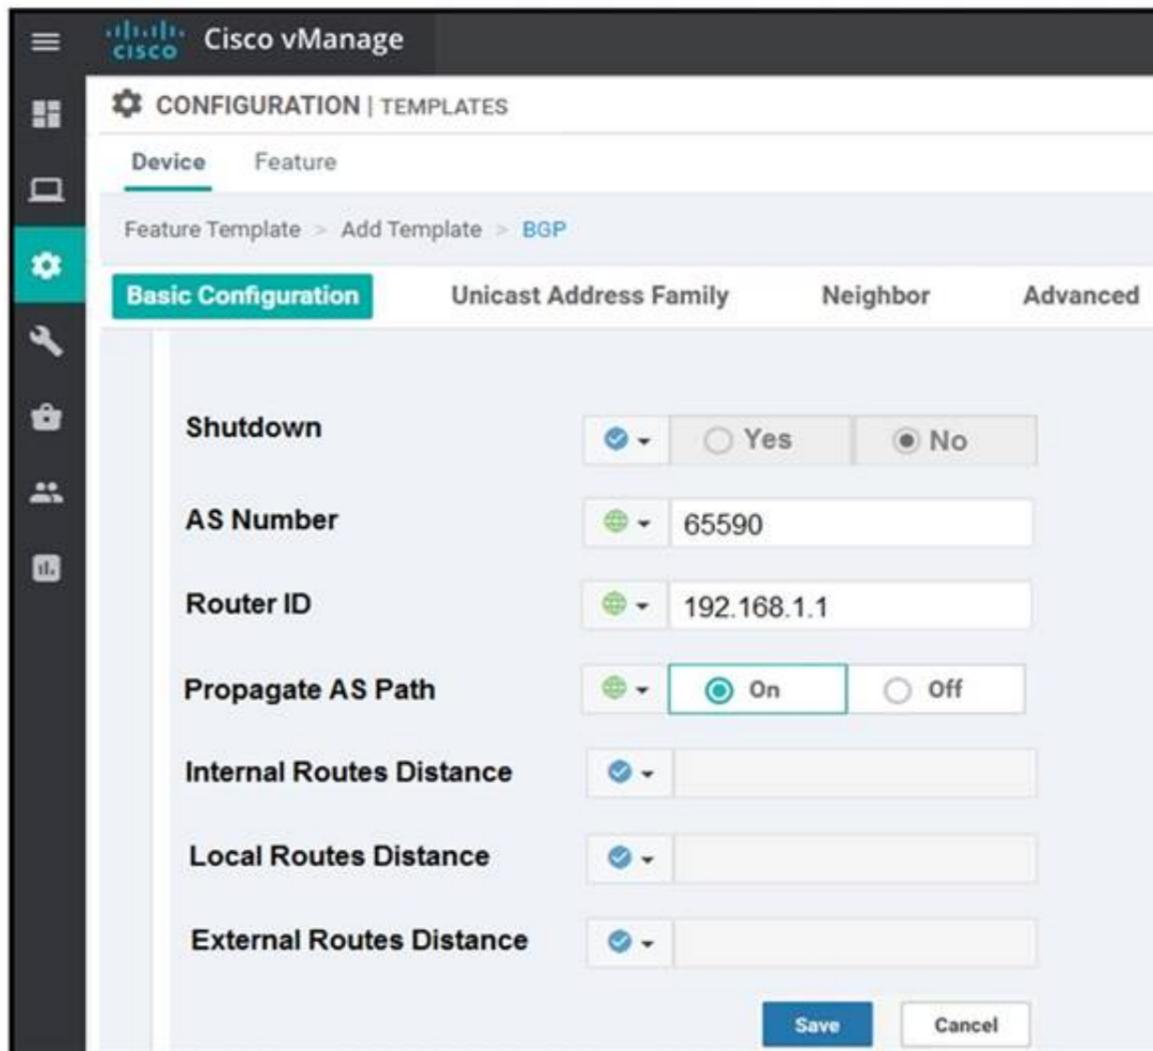


Which configuration value is used to change the administrative distance of iBGP routes to 20?

- A. Configure internal Routes Distance to 20
- B. Configure Propagate AS Path to off
- C. Configure Local Distance to 20
- D. Configure External routes distance 20

Answer: C

NEW QUESTION 188

Refer to the exhibit.

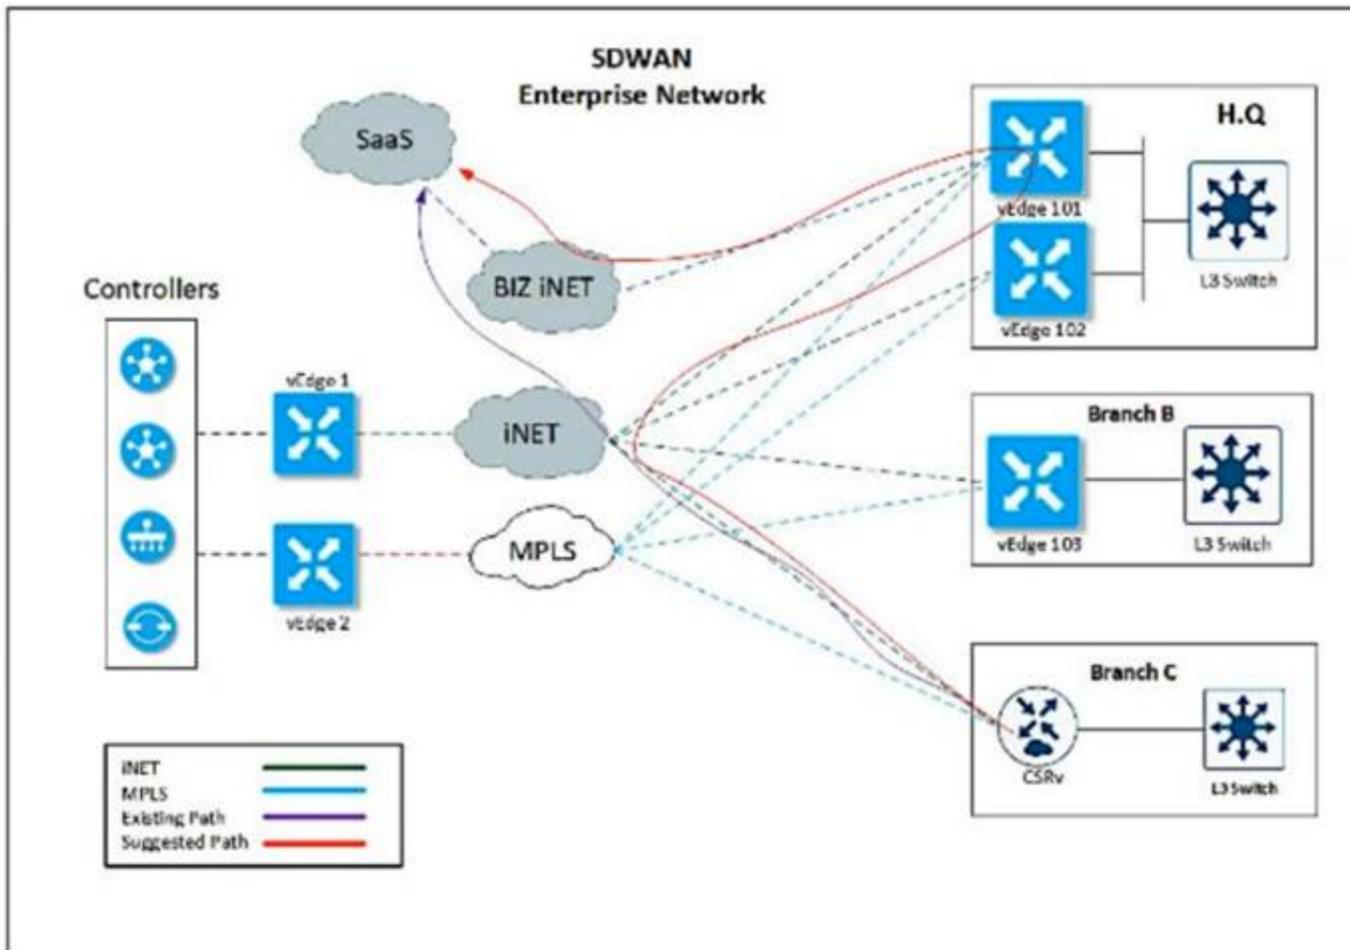

An enterprise decides to use the Cisco SD-WAN Cloud onRamp for SaaS feature and utilize H.Q site Biz iNET to reach SaaS Cloud for branch C. currently reaching SaaS Cloud directly. Which role must be assigned to devices at both sites in vManage Cloud Express for this solution to work?

- A. H.Q to be added as Gateway and Branch as DIA.
- B. Branch to be added as Client Sites and H.Q as DIA.
- C. Branch to be added as DIA and H.Q as Client Site.
- D. H.Q to be added as Gateway and Branch as Client Site.

Answer: B

NEW QUESTION 189

How is the software managed in Cisco SD-WAN?

- A. Software upgrade operation in the group must include vManag
- B. vBon
- C. and vSmart.
- D. Software downgrades are unsupported for vManage
- E. Software images must be uploaded to vManage through HTTP or FTP.
- F. Software images must be transferred through VPN 512 or VPN 0 of vManage.

Answer: A

NEW QUESTION 190

How are policies deployed on cloud-tiosted Cisco SD-WAN controllers?


- A. Policies are created on vSmart and enforced by vSmart
- B. Policies are created on vSmart and enforced by vManage
- C. Policies are created on vManage and enforced by vManage.
- D. Policies are created on vManage and enforced by vSman

Answer: A


NEW QUESTION 193

An engineer must create a QoS policy by creating a class map and assigning it to the LLQ queue on a WAN Edge router Which configuration accomplishes the task?

A)

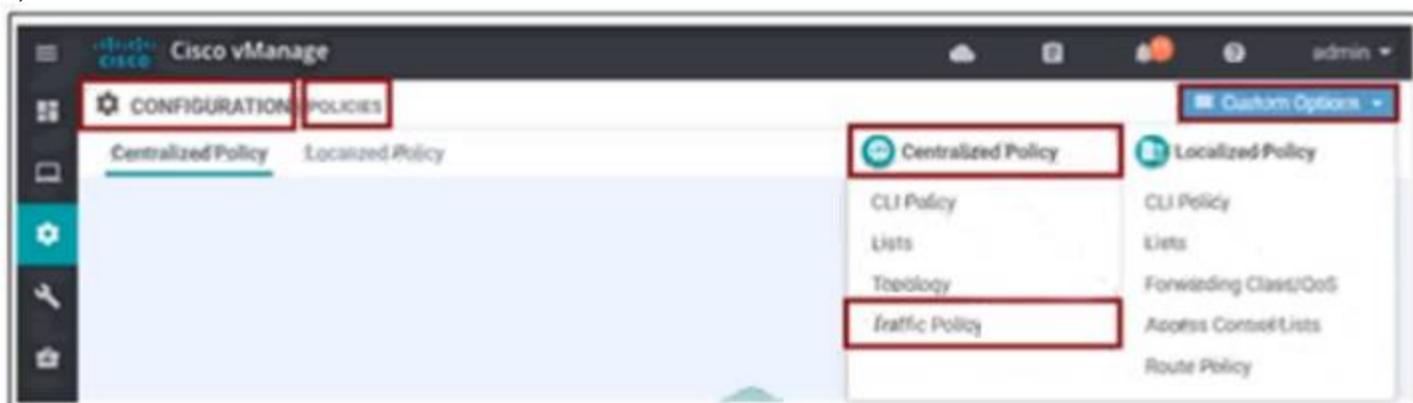


B)

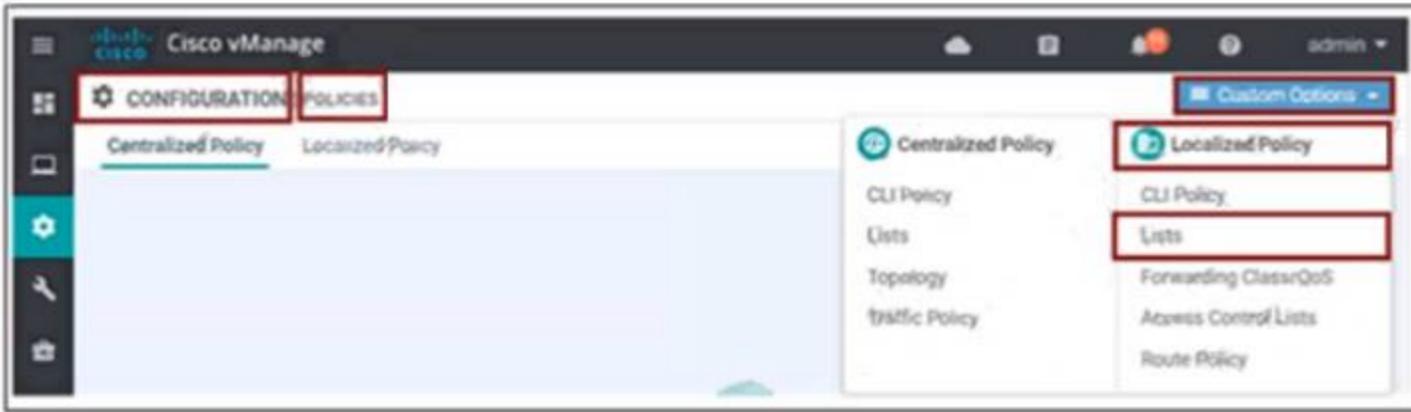

C)



D)

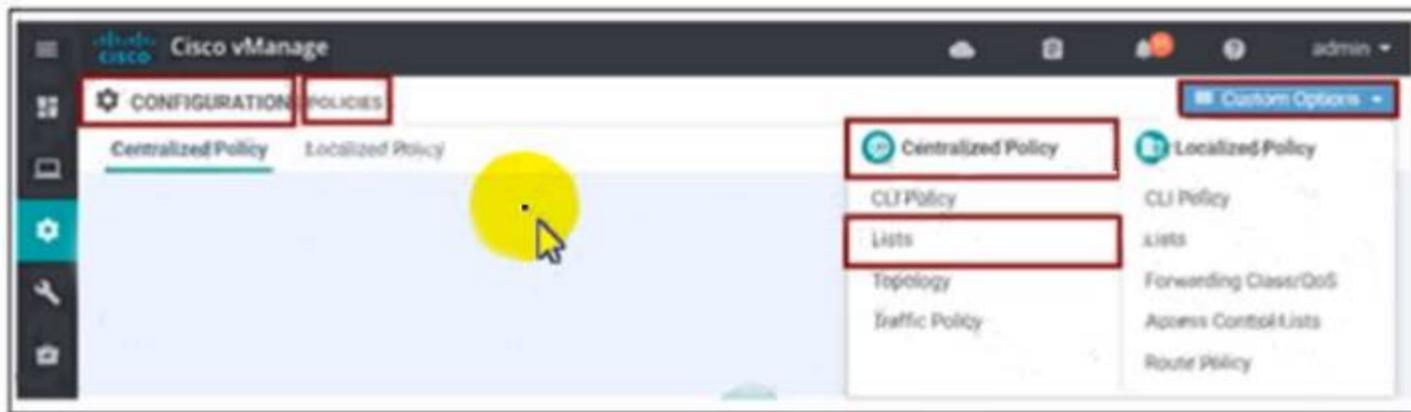

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: D

NEW QUESTION 196


Which SD-WAN component allows an administrator to manage and store software images for SD-WAN network elements?

- A. vGond controllers
- B. WAN Edge routers
- C. vSman controllers
- D. vManage NMS

Answer: D

NEW QUESTION 200

Refer to the exhibit.

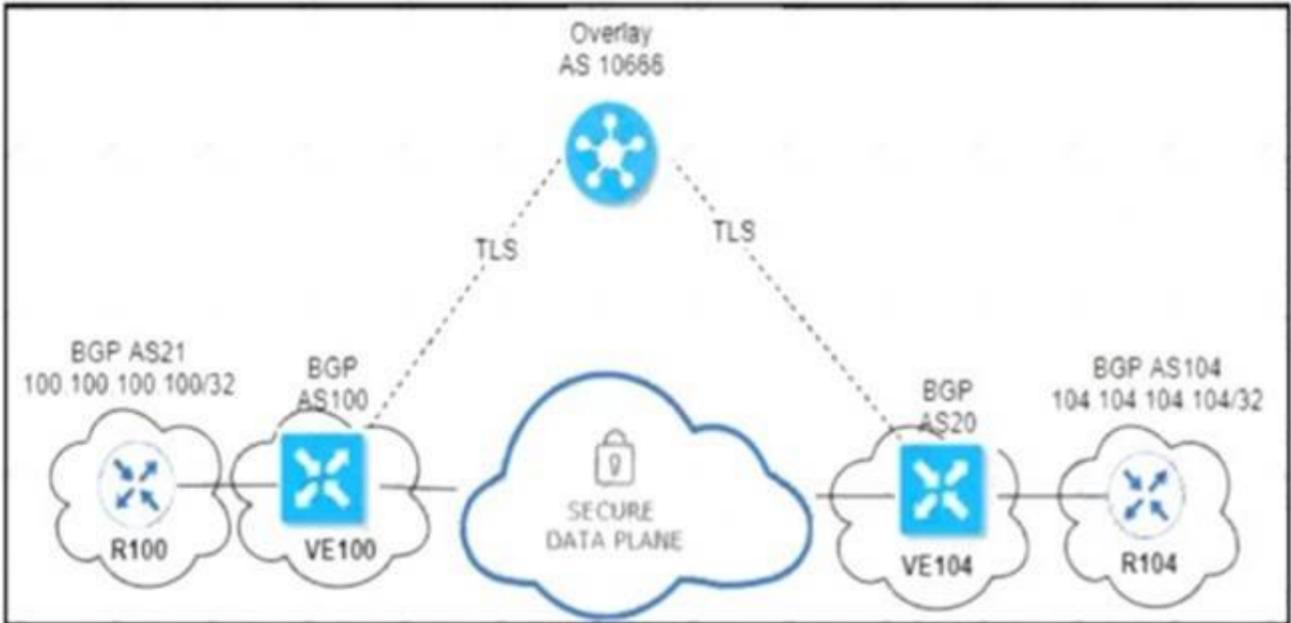

An engineer configured OMP with an overlay-as of 10666. What is the AS-PATH for prefix 104.104.104.104/32 on R100?

- A. 100 10666
- B. 100 20 104
- C. 100 10666 20 104
- D. 100 10666 104

Answer: A

NEW QUESTION 204

Which type of route advertisement of OMP can be verified?


- A. OMP, VP
- B. and origin
- C. Origin, TLOC, and VPN
- D. Origin, TLOC, and service
- E. OMP, TLOC and service

Answer: D

NEW QUESTION 207

An engineer must improve video quality by limiting HTTP traffic to the Internet without any failover. Which configuration in vManage achieves this goal?


A)

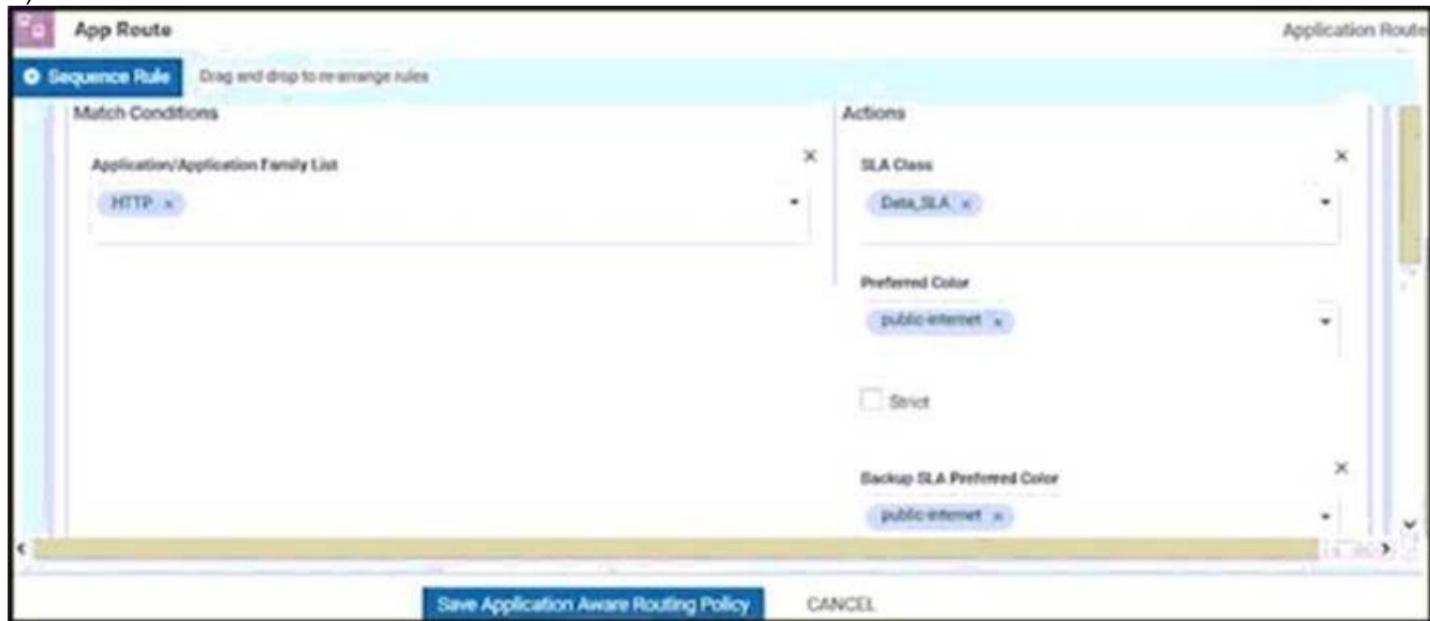


B)



C)

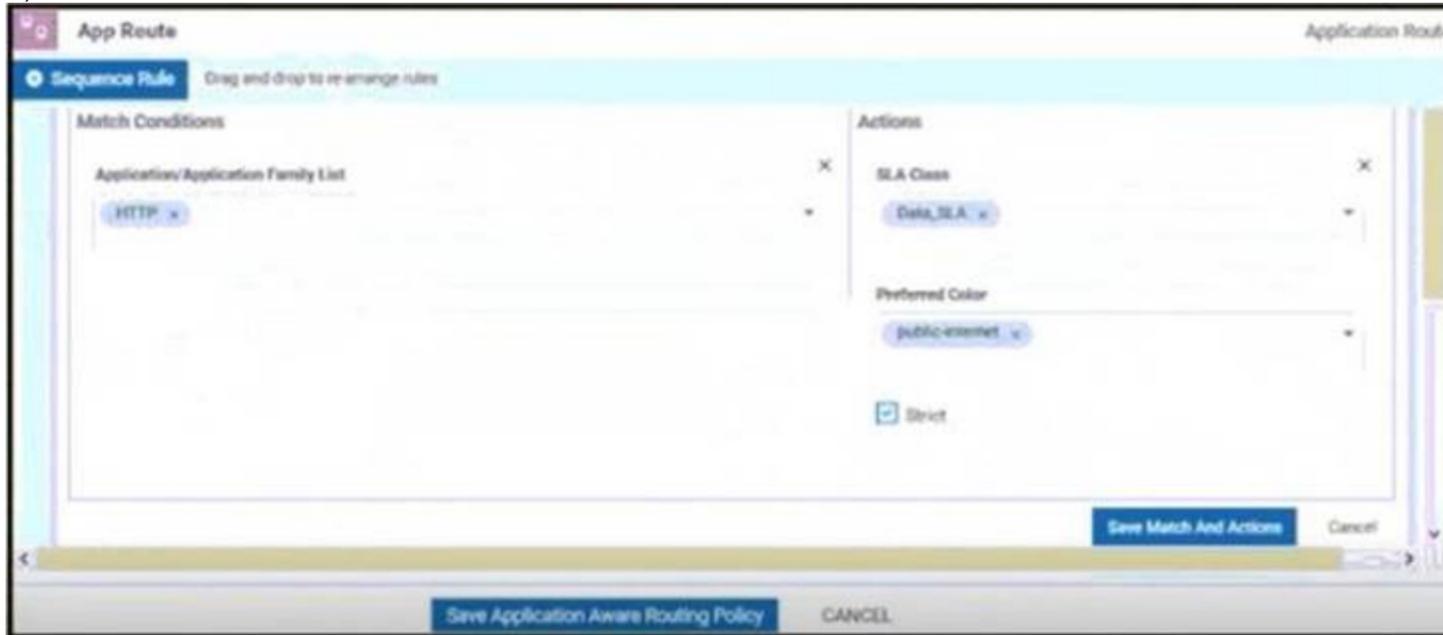

D)

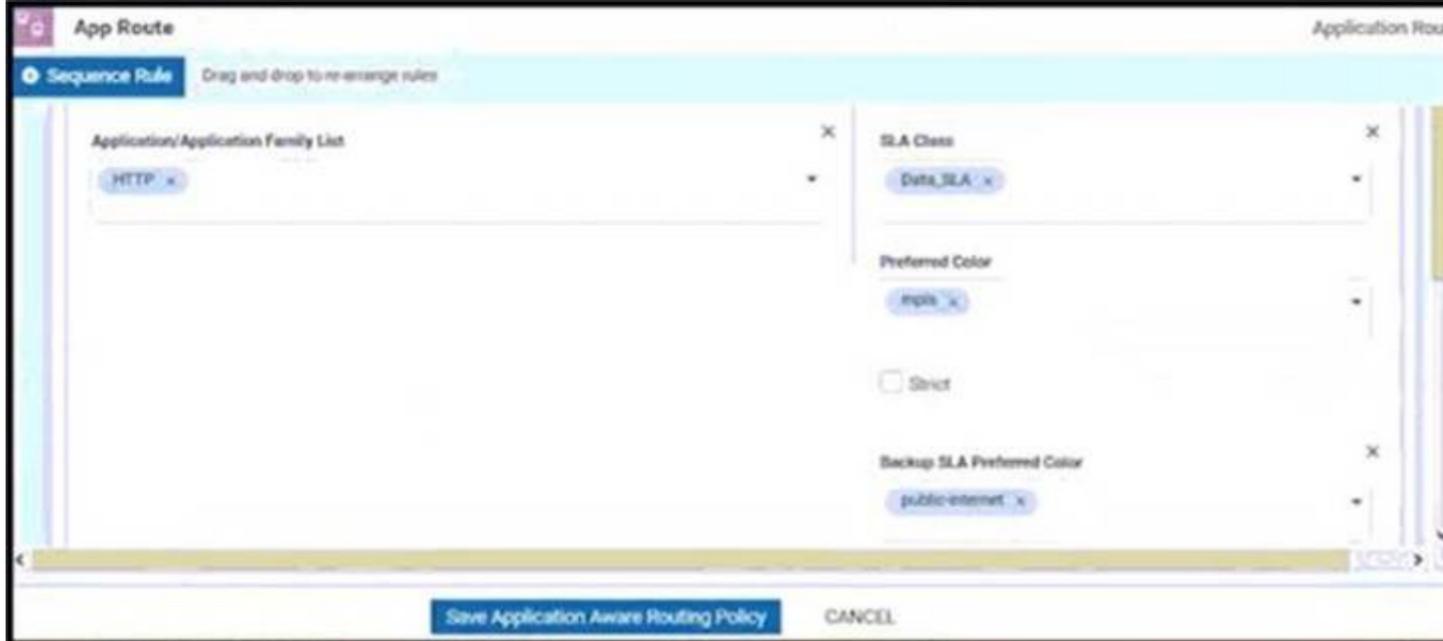

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: C

NEW QUESTION 208


What is a benefit of the application-aware firewall?

- A. It blocks traffic by MAC address
- B. It blocks traffic by MTU of the packet.
- C. It blocks traffic by application.
- D. It blocks encrypted traffic

Answer: C

NEW QUESTION 210

Refer to the exhibit.

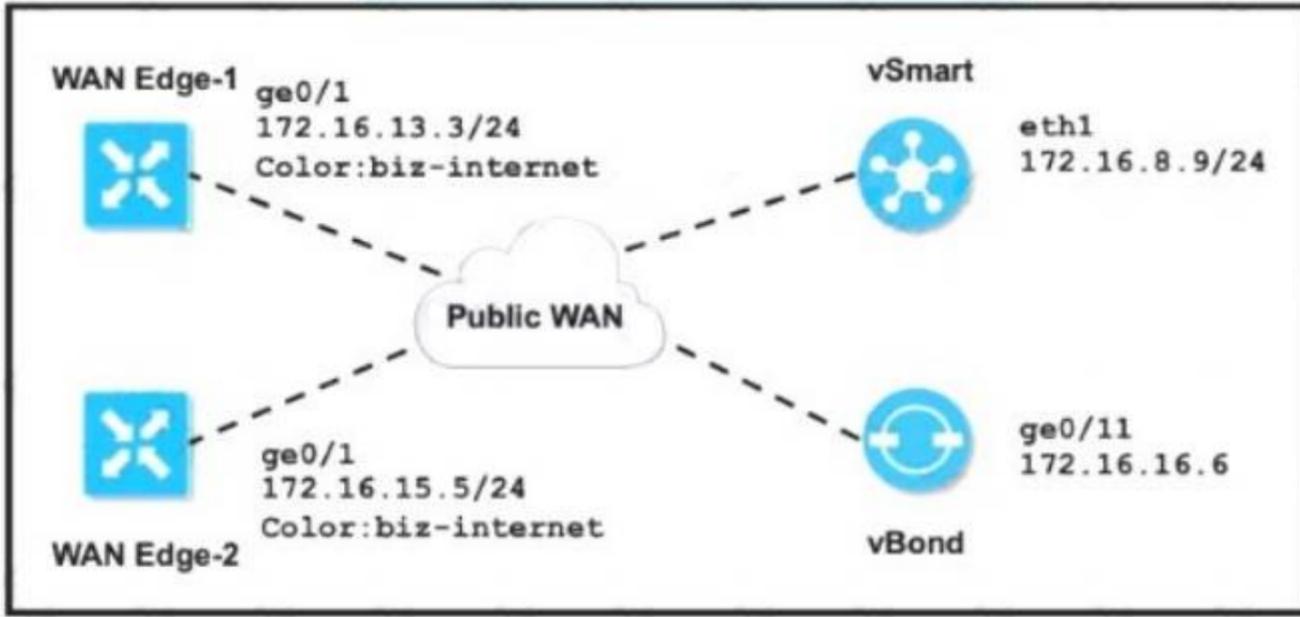

The tunnel interface configuration on both WAN Edge routers is:

```
vpn 0
interface ge0/1
tunnel-interface
encapsulation ipsec
color biz-internet
allow-service dhcp
allow-service dns
allow-service icmp
no allow-service sshd
no allow-service ntp
no allow-service stun
!
no shutdown
```

Which configuration for WAN Edge routers will connect to the Internet?

- Option A:


```
vpn 0
interface ge0/1
ip address 172.16.15.24
!
ip route 0.0.0.0/0 172.16.13.1
```
- Option B:


```
vpn 0
interface ge0/1
ip address 172.16.13.24
!
ip route 0.0.0.0/0 172.16.13.1
```
- Option C:


```
vpn 0
interface ge0/1
ip address 172.16.13.3/24
!
ip route 0.0.0.0/0 172.16.8.1
```
- Option D:


```
vpn 0
interface ge0/1
ip address 172.16.15.5/24
!
ip route 0.0.0.0/0 172.16.8.1
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: B

Explanation:

https://sdwan-docs.cisco.com/Product_Documentation/Software_Features/SD-WAN_Release_16.3/02System_a

NEW QUESTION 211

A network administrator is configuring a tunnel interface on a branch Cisco IOS XE router to run TLOC extensions. Which configuration will extend a TLOC over a GRE tunnel to another router in the branch?

- sdwan
 interface g0/0
 extended-interface
 tloc-extension-gre-from 10.1.1.1
- sdwan
 interface g0/0
 gre-interface
 tloc-extension-gre-to 10.1.1.1
- sdwan
 interface g0/0
 tunnel-interface
 tloc-extension-gre-to 10.1.1.1
- sdwan
 interface g0/0
 tloc-interface
 tloc-extension-gre-from 10.1.1.1

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: C

Explanation:

Configure a tunnel interface over which to run TLOC extensions (on IOS XE routers only). TLOC extensions allow you to extend a TLOC, over a GRE tunnel, to another router in the branch.

Command Hierarchy

```
sdwan
  interface interface-name
    tunnel-interface
    tloc-extension-gre-to extended-interface-ip-address
```

NEW QUESTION 215

An engineer is tasked to improve throughput for connection-oriented traffic by decreasing round-trip latency. Which configuration will achieve this goal?

- A. turn on "Enable TCP Optimization"
- B. turn off "Enhance ECMP Keying"
- C. turn off "Enable TCP Optimization"
- D. turn on "Enhance ECMP Keying"

Answer: A

Explanation:

TCP optimization fine-tunes the processing of TCP data traffic to decrease round-trip latency and improve throughput.

<https://www.cisco.com/c/dam/en/us/td/docs/routers/sdwan/configuration/config-18-2.pdf#page=530>

NEW QUESTION 216

In an AWS cloud, which feature provision WAN Edge routers automatically in Cisco SD-WAN?

- A. Cloud app
- B. Cloud OnRamp
- C. vAnalytics
- D. Network Designer

Answer: B

Explanation:

Cisco SD-WAN **Cloud OnRamp** for IaaS, "Cloud OnRamp" for short, is a Cisco SD-WAN feature that automates provisioning of a Cisco SD-WAN virtual appliance routers (either vEdge Cloud or CSR (Cloud Services Router)) in the AWS cloud, after providing

NEW QUESTION 218

Which SD-WAN component is configured to enforce a policy to redirect branch-to-branch traffic toward a network service such as a firewall or IPS?

- A. vBond
- B. WAN Edge
- C. vSmart
- D. Firewall

Answer: C

NEW QUESTION 221

Which two vRoute attributes should be matched or set in vSmart policies and modified by data policies? (Choose two.)

- A. site ID
- B. preference
- C. VPN
- D. TLOC
- E. origin

Answer: BC

NEW QUESTION 226

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

300-415 Practice Exam Features:

- * 300-415 Questions and Answers Updated Frequently
- * 300-415 Practice Questions Verified by Expert Senior Certified Staff
- * 300-415 Most Realistic Questions that Guarantee you a Pass on Your First Try
- * 300-415 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 300-415 Practice Test Here](#)