

Cisco

Exam Questions 300-610

Designing Cisco Data Center Infrastructure (DCID)



NEW QUESTION 1

What is an advantage of Cisco HyperFlex Edge as compared to Cisco HyperFlex Standard Clusters?

- A. Cisco Intersight automatically creates an invisible cloud witness.
- B. Cisco UCS 5108 Blade Server chassis provides SEEPROM connectivity to solve split-brain scenarios.
- C. Cisco UCS Manager provides service profile portability across nodes.
- D. Cisco HyperFlex Edge provides native container support through the KVM hypervisor.

Answer: A

NEW QUESTION 2

Drag and drop the SAN components from the left onto the correct design considerations on the right.

fabric logins	used to logically separate a SAN fabric
ISL	must be considered for the end-to-end oversubscription ratio
VSAN	these exchanges increase as a result of server virtualization
zone	must be considered when implementing access control

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

fabric logins	VSAN
ISL	ISL
VSAN	fabric logins
zone	zone

NEW QUESTION 3

A failure occurs on the network between two BFD and OSPF neighbors. Drag and drop the protocol actions from the left into the correct order on the right.

BFD notifies the local OSPF process that the BFD neighbor is no longer reachable.	step 1
If an alternate path is available, routers immediately start converging on it.	Step 2
The BFD neighboring session with the OSPF peer is terminated.	Step 3
The local OSPF process tears down the OSPF neighbor relationship.	Step 4

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

BFD notifies the local OSPF process that the BFD neighbor is no longer reachable.	The BFD neighboring session with the OSPF peer is terminated.
If an alternate path is available, routers immediately start converging on it.	BFD notifies the local OSPF process that the BFD neighbor is no longer reachable.
The BFD neighboring session with the OSPF peer is terminated.	The local OSPF process tears down the OSPF neighbor relationship.
The local OSPF process tears down the OSPF neighbor relationship.	If an alternate path is available, routers immediately start converging on it.

NEW QUESTION 4

The management of the Cisco Nexus switches is provided over an isolated out-of-band network. The VDC feature is configured on the Cisco Nexus core switches. How is out-of-band management access provided for each VDC?

- A. All the VDC have the same out-of-band IP address.
- B. Each VDC has a dedicated out-of-band Ethernet management port.
- C. Each VDC has a unique out-of-band IP address from the same IP subnet.
- D. Each VDC has a unique out-of-band IP address from different IP subnets among VDCs.

Answer: C

NEW QUESTION 5

Which orchestration tool provides a graphical interface to manage LAN and SAN fabrics?

- A. Cisco Virtual Topology System
- B. Cisco Data Center Network Manager
- C. Cisco Nexus Fabric Manager
- D. Cisco CloudCenter

Answer: B

NEW QUESTION 6

Which type fields can an engineer use to identify an iSCSI participant? (Choose two.)

- A. type
- B. preshared key
- C. port number
- D. identifying tag

E. hostname

Answer: CE

NEW QUESTION 7

Drag and drop the Cisco Nexus 7000 Series Switch resources from the left onto the correct groups on the right.

physical interfaces

port channels

TCAM

VLANs

Resources that are local to a VDC

Resources shared among all VDCs

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

physical interfaces

port channels

TCAM

VLANs

Resources that are local to a VDC

physical interfaces

VLANs

port channels

Resources shared among all VDCs

TCAM

NEW QUESTION 8

Drag and drop the configurations from the left onto the correct policies on the right.

Set the number of queues.

Set the RSS hash value.

Assign each vCon to a physical adapter.

Assign adapter order.

vNIC/vHBA Placement Policy

Ethernet Adapter Policy

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Set the number of queues.

Set the RSS hash value.

Assign each vCon to a physical adapter.

Assign adapter order.

vNIC/vHBA Placement Policy

Assign each vCon to a physical adapter.

Assign adapter order.

Ethernet Adapter Policy

Set the number of queues.

Set the RSS hash value.

NEW QUESTION 9

Drag and drop the feature descriptions from the left onto the correct UCS Fabric Interconnect modes on the right.

Links are active-active.

MAC address learning occurs on the uplink ports.

STP runs on the uplink ports.

This is the default mode of operation.

End-Host Mode


Switch Mode

- A. Mastered

B. Not Mastered

Answer: A

Explanation:

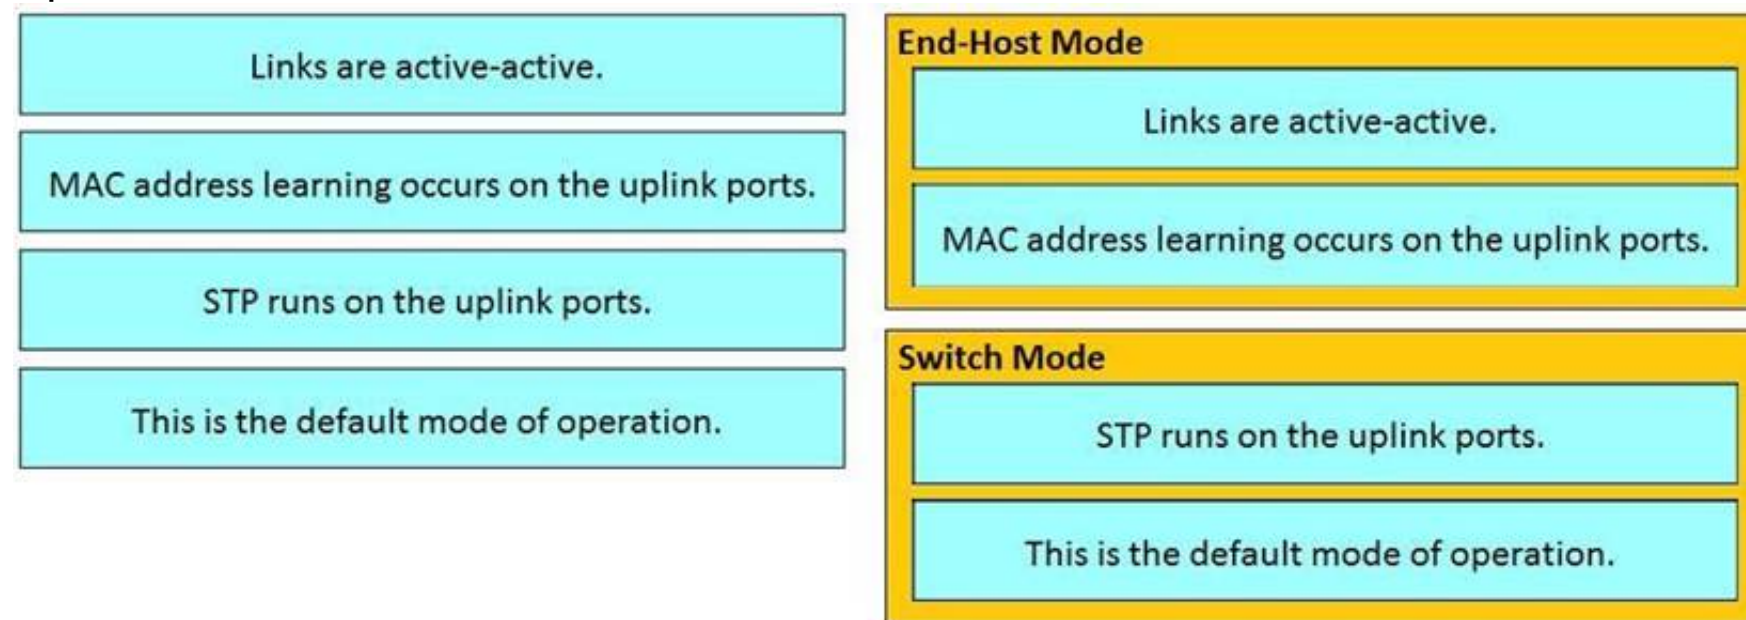

NEW QUESTION 10

What are two reasons to select OTV as the DCI solution to connect multisite topologies? (Choose two.)

- A. It propagates hosts reachability without support of traffic flooding.
- B. Layer 3 failures do not propagate beyond the OTV edge device.
- C. It extends the spanning tree between data centers.
- D. It is an open standard.
- E. It constrains HSRP hello messages to each data center.

Answer: BC

NEW QUESTION 10

What is an advantage of using OTV as compared to VPLS for data center redundancy?

- A. prevents loops on point-to-point links
- B. provides head-end replication
- C. uses a proactive MAC advertisement
- D. provides full-mesh connectivity

Answer: A

NEW QUESTION 14

What are two functions of a Network Services Orchestrator in an NFV environment? (Choose two.)

- A. It operates at the resource-facing services layer and provides overall lifecycle management at the network service level.
- B. It provides an API-based northbound interface for transparent integration with systems that operate at the resource-facing services layer.
- C. It provides a standards-based southbound interface for transparent integration with systems that operate at the customer-facing services layer.
- D. It provides a standards-based northbound interface for transparent integration with systems that operate at the customer-facing services layer.
- E. It operates at the customer-facing services layer and provides the management interface for the virtual network devices.

Answer: AB

NEW QUESTION 15

Which address pool is used when a vHBA template is created?

- A. MAC
- B. WWPN
- C. IP
- D. UUID

Answer: B

NEW QUESTION 18

Which two statements describe Ethernet switching mode on Cisco UCS 6100 Series Fabric Interconnects? (Choose two.)

- A. STP runs on the uplink ports of each VLAN, as defined by PVSTP+.
- B. STP runs on the uplink ports of each VLAN, as defined by MSTP.
- C. The STP parameter configuration is unsupported.
- D. The STP parameter configuration is supported.
- E. STP runs on the server ports.

Answer: AC

NEW QUESTION 21

Which Cisco HyperFlex feature provides virtual machine-level cost scaling for desktop virtualization growth?

- A. HyperFlex Edge support
- B. encryption offload cards
- C. dedicated compute nodes
- D. fabric interconnects

Answer: A

NEW QUESTION 24


Which two automation requirements can be met by using Puppet? (Choose two.)

- A. Push configuration updates immediately to servers.
- B. Enable clients to pull changes to configuration files.
- C. Enable clients to pull changes without installing an agent.
- D. Provide support for writing new modules in Python.
- E. Enable one-off infrastructure changes to be performed manually.

Answer: AB

NEW QUESTION 25

Refer to the exhibit.

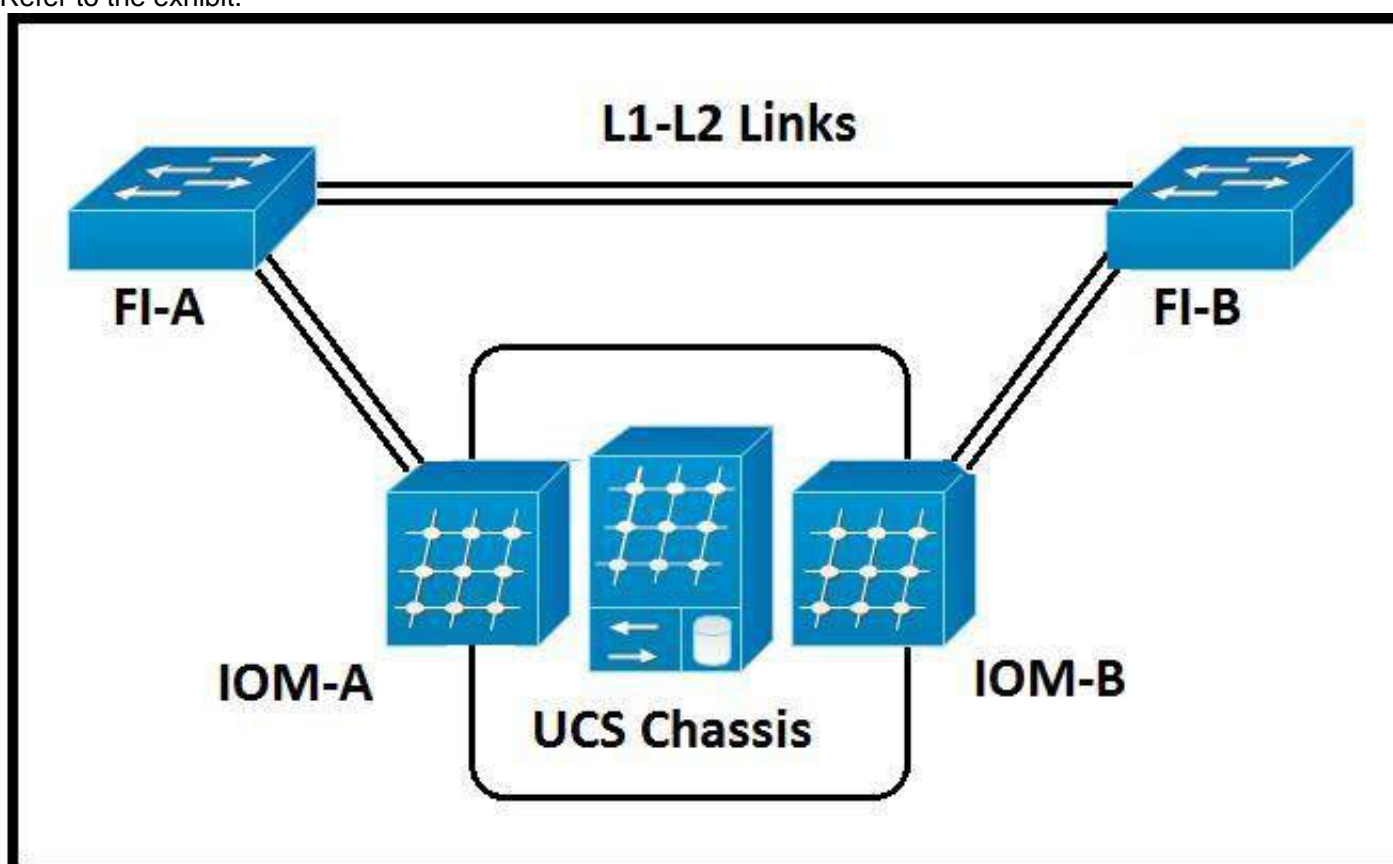

A Cisco UCS chassis that has two IOMs is discovered. The chassis discovery policy creates a fabric port channel. What is the result of this policy?

- A. Cisco UCS Manager creates two separate fabric port channels.
- B. Cisco UCS Manager creates a single fabric port channel.
- C. The port channel is disabled until an administrator enables it manually.
- D. Each uplink that connects an IOM is configured as a discrete link.

Answer: A

NEW QUESTION 27

Which technology enables Layer 2 extension between remote data center sites?

- A. FCIP
- B. GRE
- C. DMVPN
- D. OTV

Answer: D

NEW QUESTION 28

Drag the appropriate from the left onto the current UDLD modes of operation on the right.

Uses STP if UDLD information times out.

Detects when a port is stuck.

Disables a port that has a high error rate.

Allows a port that has a high error rate.

Normal Mode

Aggressive Mode

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Uses STP if UDLD information times out.

Detects when a port is stuck.

Disables a port that has a high error rate.

Allows a port that has a high error rate.

Normal Mode

Uses STP if UDLD information times out.


Allows a port that has a high error rate.

Aggressive Mode

Detects when a port is stuck.

Disables a port that has a high error rate.

NEW QUESTION 33
Refer to the exhibit.

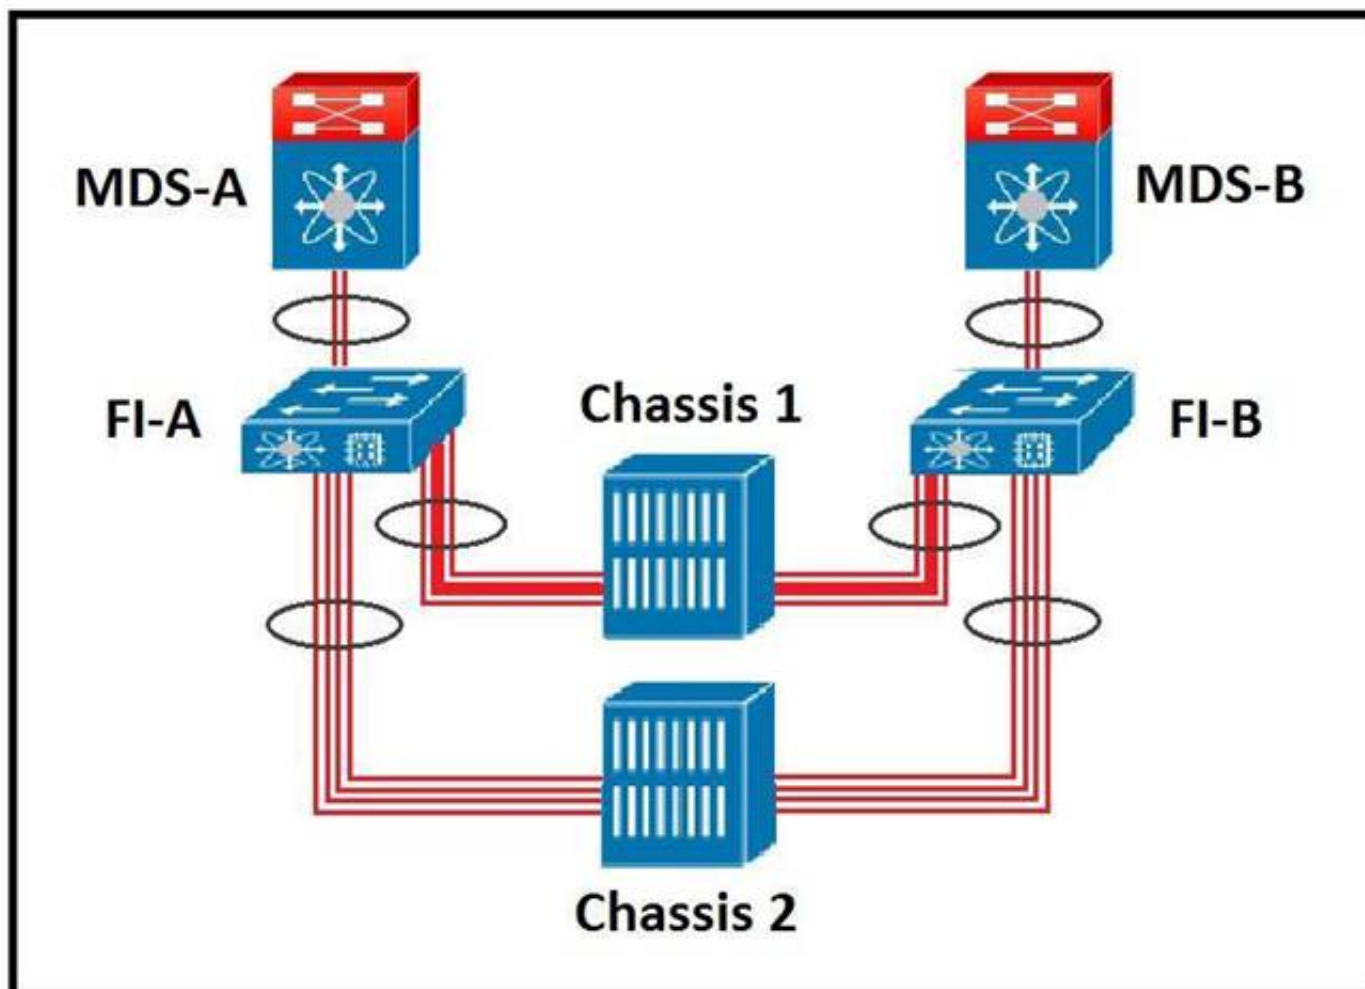

An engineer must assign multiple Fibre Channel IDs to a single port channel. Which two features must be enabled this goal? (Choose two.)

- A. SAN Pin Groups on the Cisco UCS Fabric Interconnects.
- B. NPV feature on the Cisco MDS Series.
- C. end-host mode feature on the Cisco UCS Fabric Interconnects
- D. NPIV feature on the Cisco MDS Series
- E. Smart Zoning feature on the Cisco UCS Fabric Interconnects

Answer: BD

NEW QUESTION 34

Which orchestration tool should be used for the management and analytics of servers across multiple sites?

- A. Cisco Intersight
- B. Cisco Nexus Fabric Manager
- C. Cisco UCS Manager
- D. Cisco Data Center Network Manager

Answer: A

NEW QUESTION 36

Which two methods mitigate congestion in a SAN network? (Choose two.)

- A. Configure ER_RDY to allow splitting of each ISL between switches into separate virtual links.
- B. Use the port-monitor command to detect slow drain devices.
- C. Configure the port channel to enable individual buffer-to-buffer credits.
- D. Configure the port monitor to allow categorization of a specific device as slow.
- E. Configure the flow control for the FC to use R_RDY.

Answer: BD

NEW QUESTION 37

Which factor determines the choice of platform designing a Cisco HyperFlex infrastructure to support computer-aided design applications?

- A. network speed
- B. GPU support
- C. storage capacity
- D. processor count

Answer: C

NEW QUESTION 39

An engineer deploys LISP VM mobility. Which feature is configured on the interfaces that have VM mobility enabled?

- A. IP redirects
- B. flow control
- C. proxy ARP
- D. HSRP

Answer: C

NEW QUESTION 43

Which pools are used when a vNIC template is created in Cisco UCS Manager?

- A. WWPN
- B. UUID
- C. MAC
- D. IP

Answer: C

NEW QUESTION 46

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

300-610 Practice Exam Features:

- * 300-610 Questions and Answers Updated Frequently
- * 300-610 Practice Questions Verified by Expert Senior Certified Staff
- * 300-610 Most Realistic Questions that Guarantee you a Pass on Your First Try
- * 300-610 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 300-610 Practice Test Here](#)