

# Network-Appliance

## Exam Questions NS0-184

NetApp Certified Storage Installation Engineer - ONTAP



#### NEW QUESTION 1

You have a 2-node FAS8300 ONTAP 9.8 cluster that serves SMB shares. You are configuring interface groups for higher performance and resiliency.

Which two NetApp best practices should you follow to satisfy these performance and resiliency requirements? (Choose two.)

- A. Use ports from different NICs.
- B. Use ports from the same NICs.
- C. Use ports with different chipsets.
- D. Use ports with the same chipsets.


**Answer:** AD

#### Explanation:

Reference: <https://www.netapp.com/media/19900-tr-4847.pdf> (7)

#### NEW QUESTION 2

Click the Exhibit button.

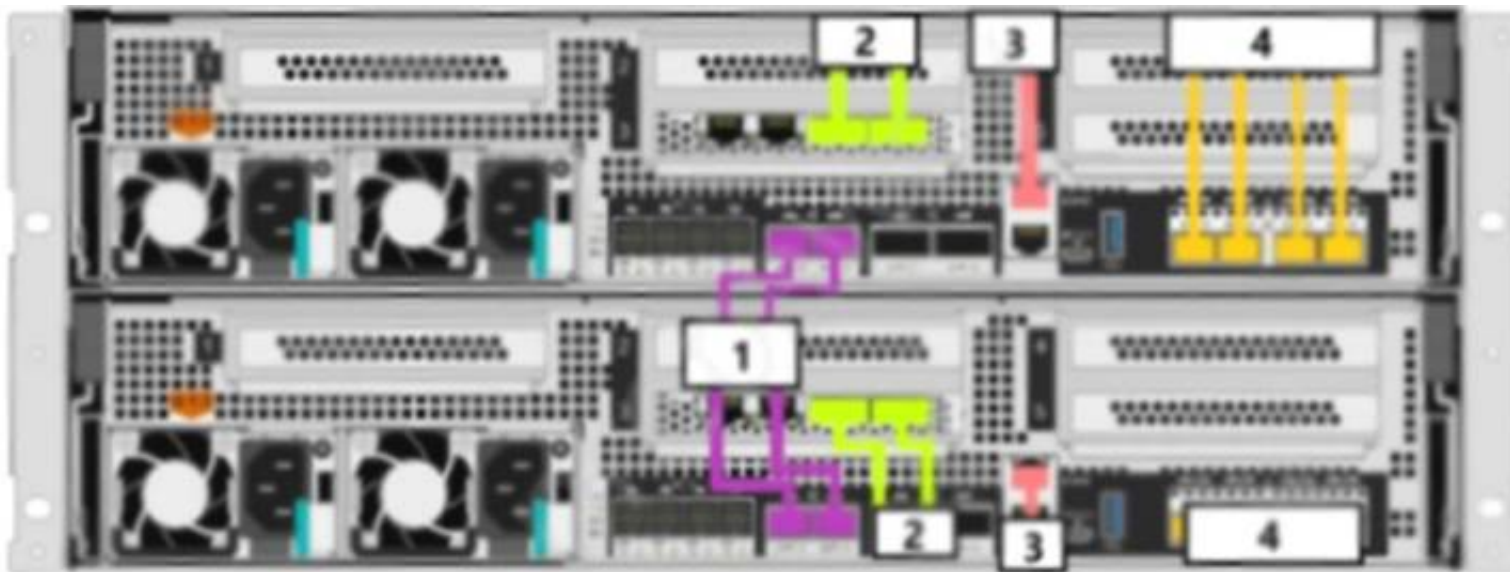

You want to add an AFF A400 system to an existing 4-node cluster.

Referring to the exhibit, which number points to the ports that are used to cable the new nodes to the cluster interconnect switches.

- A. 4
- B. 2
- C. 3
- D. 1

**Answer:** B

#### NEW QUESTION 3


You are adding new nodes to a 2-node switchless cluster. According to NetApp, what must you do before adding the nodes?

- A. You must configure cluster peering.
- B. must install interconnect switches.
- C. You must configure vservers peering.
- D. You must enable a cluster HA

**Answer:** B

#### NEW QUESTION 4

Exhibit:

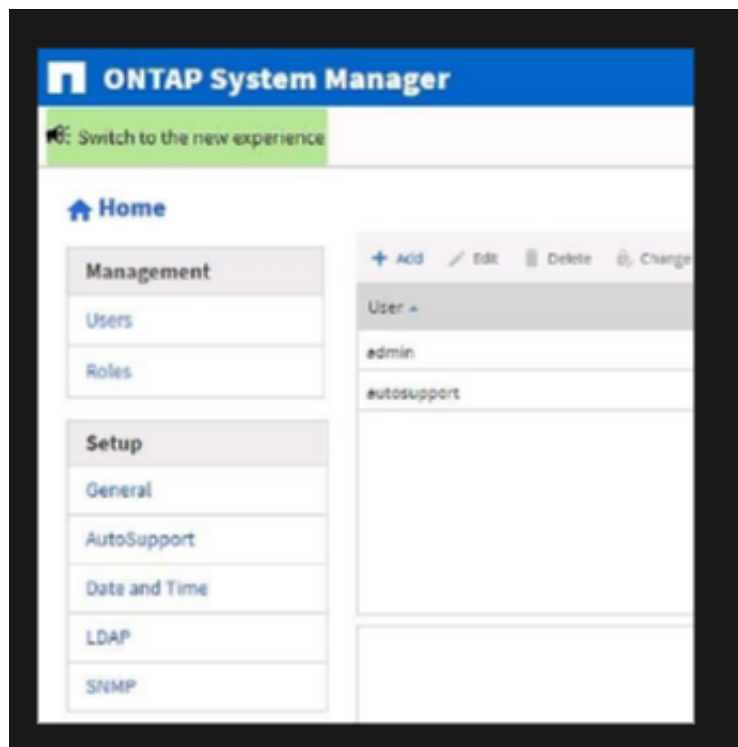

You finished installing an ONTAP cluster and must inform the customer of the completion. As part of this exercise, you will show how to configure the ONTAP cluster using ONTAP System Manager, so that NetApp will receive notifications of any future issues. What would you select to allow the customer to receive this information?

- A. General
- B. Date and Time
- C. Users
- D. AutoSupport

**Answer: D**

#### NEW QUESTION 5

You have added two new AFF A250 nodes to an existing 4-node cluster with NetApp CN1610 cluster Network switches. Although the nodes can join the cluster, the storage failover show command output shows that the NVRAM log is not synchronized, and it cannot reach the partner over an HA interconnect. In this scenario, which two statements are true? (Choose two.)

- A. The AFF A250 requires switches with 40GbE port support.
- B. The AFF A250 uses different ports for the cluster and the HA interconnect.
- C. The AFF A250 requires switches with 25GbE port support.
- D. The AFF A250 uses the same port for the cluster and the HA interconnect.

**Answer: BC**

#### NEW QUESTION 6

Data ONTAP 9 supports which three features? (Choose three.)

- A. SMB 3.0
- B. NFSv2
- C. SnapMirror
- D. Infinite Volumes

**Answer: ACD**

#### NEW QUESTION 7

Upon finishing the Installation of a new system for a customer, they request that you train them on how to administer the system. In this scenario, which two responses are appropriate? (Choose two.)

- A. Visit the NetApp MySupport Site and look for the Express Guides, they will guide you through the dailytasks and provide input and output examples.
- B. If you have a specific issue, you can visit the Knowledge Base Web site (<https://kb.netapp.com>).
- C. The answers to any of your questions can be found on the NetApp SmartSolve site(<http://smartsolve.netapp.com>).
- D. You should open a case with NetApp Support for all future questions with low priority and include thekeyword "Training" in the title.

**Answer: AC**

#### NEW QUESTION 8


Which two statements are true about the LIFs that are used for a cluster peer relationship? (Choose two.)

- A. The MTU size must be set to 9000 bytes on all the LIFs used for the cluster peering.
- B. The LIFs must use the default intercluster service policy.
- C. The LIFs must be in dedicated broadcast domains an IPspaces.
- D. At least one LIF per node is required on each cluster.

**Answer: BC**

#### NEW QUESTION 9

Click the Exhibit button.

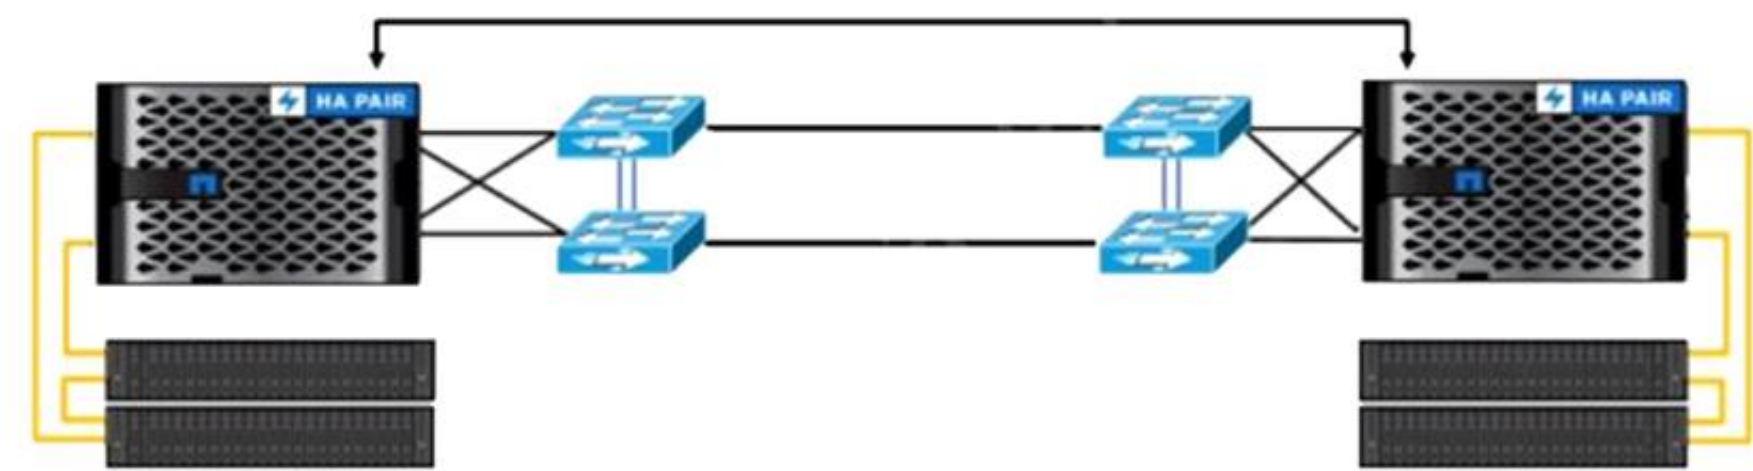

What are two functions of the four Ethernet switches in the supported configuration that is shown in the exhibit? (Choose two.)

- A. to provide a direct connection for the SnapMirror Synchronous (SM-S)
- B. to install cross-site cluster management switches
- C. to provide connectivity for NVRAM over iWARP
- D. to enable SyncMirror replication

Answer: AC

NEW QUESTION 10

An administrator issued the cluster setup command and configured a 2-node ONTAP 9.8 cluster. In this scenario, which tool would the administrator use to validate the configuration?

- A. Active IQ Upgrade Advisor
- B. Interoperability Matrix Tool
- C. NetAppDocs
- D. Active IQ Config Advisor

Answer: C

NEW QUESTION 10

Click the Exhibit button.

```
cluster1::> network interface show
```

Vserver	Logical Interface	Status Admin/Oper	Network Address/Mask	Current Node	Current Port	Is Home
Cluster	cluster1-01_clus1	up/up	169.254.145.151/16	cluster1-01	e0a	true
	cluster1-01_clus2	up/up	169.254.58.159/16	cluster1-01	e0b	true
	cluster1-02_clus1	up/up	169.254.110.0/16	cluster1-02	e0a	true
	cluster1-02_clus2	up/up	169.254.212.198/16	cluster1-02	e0b	true
cluster1	cluster1-01_mgmt1	up/up	192.168.0.111/24	cluster1-01	e0c	true
	cluster1-02_mgmt1	up/up	192.168.0.112/24	cluster1-02	e0c	true
	cluster_mgmt	up/up	192.168.0.101/24	cluster1-01	e0c	true

You are installing a new AFF All SAN Array A700 HA pair. Referring to the exhibit, which IP address would have been used to join node 02 to the cluster during setup?

- A. 192.168.0.112
- B. 169.254.212.198
- C. 169.254.145.151
- D. 192.168.0.101

Answer: A

NEW QUESTION 15

You want to disconnect a DS224C shelf with 3.8 TB NetApp Storage Encryption (NSE) SSDs to an AFF A300HApairwithtwoDS224C shelveswith3.8 TB SSDs without NSE in one stack. In this scenario, how would you add the shelf?

- A. Addtheshelftothe existingstack.
- B. Create a newstackon the HA pairto add the shelf.
- C. Connectthe shelfto anHA pair withNSE drives.




D. LicenseNSE and add the shelfto thisHA pair as a new stack.

**Answer:** A

#### NEW QUESTION 20

Click the Exhibit button.

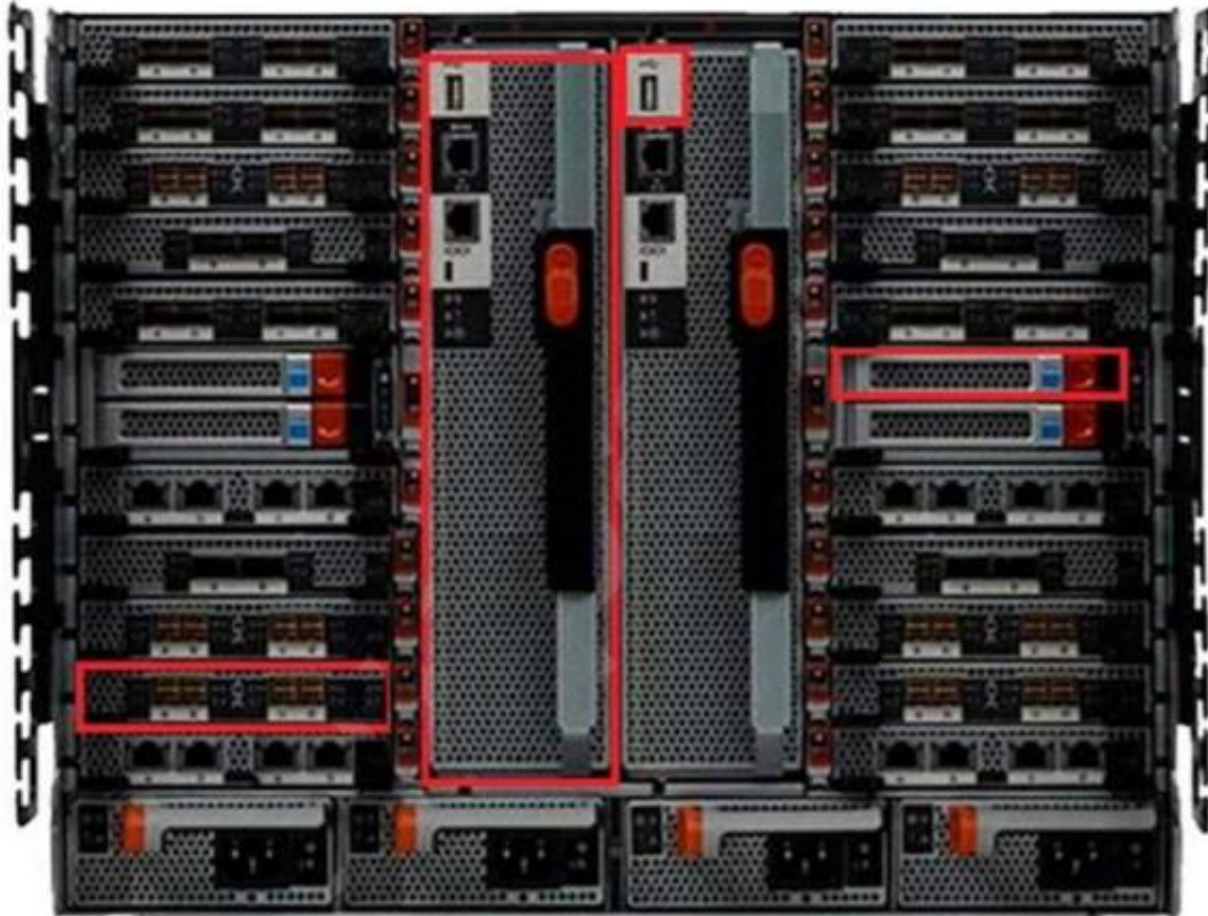

Which set of components on a FAS9000 are highlighted in the exhibit?

- A. FCVI-Module, Controller, Serial-Port, FlashCache-Module
- B. SAS-Module, Controller, USB-Port, FlashCache-Module
- C. NVRAM-Module, Controller, Serial-Port, FlashCache-Module
- D. Powersupply, Controller, USB-Port, NVRAM-Module

**Answer:** A

#### NEW QUESTION 25

YouareinstallinganAFFA700systemwithtwodisk shelves usingADPv2.Aftersettingupthecluster, you realize that one drive shelf was powered off and that the drives have not been assigned to any of the nodes.

In this scenario, which two resources will help you find a solution? (Choose two.)

- A. Active IQ Config Advisor
- B. NetApp Documentation Center
- C. NetApp Knowledge Base
- D. Active IQ Digital Advisor

**Answer:** AC

#### Explanation:

Reference: <https://docs.netapp.com/us-en/ontap-systems/fas9000/install-detailedguide.html#option-1-cable-the-controllers-to-ds212c-or-ds224c-drive-shelves>

#### NEW QUESTION 26

.....

## Thank You for Trying Our Product

### We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

### NS0-184 Practice Exam Features:

- \* NS0-184 Questions and Answers Updated Frequently
- \* NS0-184 Practice Questions Verified by Expert Senior Certified Staff
- \* NS0-184 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- \* NS0-184 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

**100% Actual & Verified — Instant Download, Please Click**  
**[Order The NS0-184 Practice Test Here](#)**