

## Exam Questions SSCP

System Security Certified Practitioner (SSCP)

<https://www.2passeasy.com/dumps/SSCP/>



### NEW QUESTION 1

- (Topic 1)

Which type of password token involves time synchronization?

- A. Static password tokens
- B. Synchronous dynamic password tokens
- C. Asynchronous dynamic password tokens
- D. Challenge-response tokens

**Answer: B**

#### Explanation:

Synchronous dynamic password tokens generate a new unique password value at fixed time intervals, so the server and token need to be synchronized for the password to be accepted.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 37).

Also check out: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw- Hill/Osborne, 2002, chapter 4: Access Control (page 136).

### NEW QUESTION 2

- (Topic 1)

The type of discretionary access control (DAC) that is based on an individual's identity is also called:

- A. Identity-based Access control
- B. Rule-based Access control
- C. Non-Discretionary Access Control
- D. Lattice-based Access control

**Answer: A**

#### Explanation:

An identity-based access control is a type of Discretionary Access Control (DAC) that is based on an individual's identity.

DAC is good for low level security environment. The owner of the file decides who has access to the file.

If a user creates a file, he is the owner of that file. An identifier for this user is placed in the file header and/or in an access control matrix within the operating system.

Ownership might also be granted to a specific individual. For example, a manager for a certain department might be made the owner of the files and resources within her department. A system that uses discretionary access control (DAC) enables the owner of the resource to specify which subjects can access specific resources.

This model is called discretionary because the control of access is based on the discretion of the owner. Many times department managers, or business unit managers, are the owners of the data within their specific department. Being the owner, they can specify who should have access and who should not.

Reference(s) used for this question:

Harris, Shon (2012-10-18). CISSP All-in-One Exam Guide, 6th Edition (p. 220). McGraw- Hill . Kindle Edition.

### NEW QUESTION 3

- (Topic 1)

Which of following is not a service provided by AAA servers (Radius, TACACS and DIAMETER)?

- A. Authentication
- B. Administration
- C. Accounting
- D. Authorization

**Answer: B**

#### Explanation:

Radius, TACACS and DIAMETER are classified as authentication, authorization, and accounting (AAA) servers.

Source: TIPTON, Harold F. & KRAUSE, MICKI, Information Security Management Handbook, 4th Edition, Volume 2, 2001, CRC Press, NY, Page 33.

also see:

The term "AAA" is often used, describing cornerstone concepts [of the AIC triad] Authentication, Authorization, and Accountability. Left out of the AAA acronym is Identification which is required before the three "A's" can follow. Identity is a claim, Authentication proves an identity, Authorization describes the action you can perform on a system once you have been identified and authenticated, and accountability holds users accountable for their actions.

Reference: CISSP Study Guide, Conrad Misenar, Feldman p. 10-11, (c) 2010 Elsevier.

### NEW QUESTION 4

- (Topic 1)

What is the main concern with single sign-on?

- A. Maximum unauthorized access would be possible if a password is disclosed.
- B. The security administrator's workload would increase.
- C. The users' password would be too hard to remember.
- D. User access rights would be increased.

**Answer: A**

#### Explanation:

A major concern with Single Sign-On (SSO) is that if a user's ID and password are compromised, the intruder would have access to all the systems that the user was authorized for.

The following answers are incorrect:

The security administrator's workload would increase. Is incorrect because the security administrator's workload would decrease and not increase. The admin

would not be responsible for maintaining multiple user accounts just the one.  
The users' password would be too hard to remember. Is incorrect because the users would have less passwords to remember.  
User access rights would be increased. Is incorrect because the user access rights would not be any different than if they had to log into systems manually.

#### NEW QUESTION 5

- (Topic 1)

Which of the following is implemented through scripts or smart agents that replays the users multiple log-ins against authentication servers to verify a user's identity which permit access to system services?

- A. Single Sign-On
- B. Dynamic Sign-On
- C. Smart cards
- D. Kerberos

**Answer:** A

#### Explanation:

SSO can be implemented by using scripts that replay the users multiple log- ins against authentication servers to verify a user's identity and to permit access to system services.

Single Sign on was the best answer in this case because it would include Kerberos. When you have two good answers within the 4 choices presented you must select the

BEST one. The high level choice is always the best. When one choice would include the other one that would be the best as well.

Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 40.

#### NEW QUESTION 6

- (Topic 1)

What is called the type of access control where there are pairs of elements that have the least upper bound of values and greatest lower bound of values?

- A. Mandatory model
- B. Discretionary model
- C. Lattice model
- D. Rule model

**Answer:** C

#### Explanation:

In a lattice model, there are pairs of elements that have the least upper bound of values and greatest lower bound of values.

Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 34.

#### NEW QUESTION 7

- (Topic 1)

Which of the following is most affected by denial-of-service (DOS) attacks?

- A. Confidentiality
- B. Integrity
- C. Accountability
- D. Availability

**Answer:** D

#### Explanation:

Denial of service attacks obviously affect availability of targeted systems. Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 3: Telecommunications and Network Security (page 61).

#### NEW QUESTION 8

- (Topic 1)

Which of the following offers advantages such as the ability to use stronger passwords, easier password administration, one set of credential, and faster resource access?

- A. Smart cards
- B. Single Sign-On (SSO)
- C. Symmetric Ciphers
- D. Public Key Infrastructure (PKI)

**Answer:** B

#### Explanation:

The advantages of SSO include having the ability to use stronger passwords, easier administration as far as changing or deleting the passwords, minimize the risks of orphan accounts, and requiring less time to access resources.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 39.

#### NEW QUESTION 9

- (Topic 1)

Which of the following is a trusted, third party authentication protocol that was developed under Project Athena at MIT?

- A. Kerberos
- B. SESAME
- C. KryptoKnight
- D. NetSP

**Answer:** A

**Explanation:**

Kerberos is a trusted, third party authentication protocol that was developed under Project Athena at MIT.

Kerberos is a network authentication protocol. It is designed to provide strong authentication for client/server applications by using secret-key cryptography. A free implementation of this protocol is available from the Massachusetts Institute of Technology. Kerberos is available in many commercial products as well.

The Internet is an insecure place. Many of the protocols used in the Internet do not provide any security. Tools to "sniff" passwords off of the network are in common use by systems crackers. Thus, applications which send an unencrypted password over the network are extremely vulnerable. Worse yet, other client/server applications rely on the client program to be "honest" about the identity of the user who is using it. Other applications rely on the client to restrict its activities to those which it is allowed to do, with no other enforcement by the server.

Some sites attempt to use firewalls to solve their network security problems. Unfortunately, firewalls assume that "the bad guys" are on the outside, which is often a very bad

assumption. Most of the really damaging incidents of computer crime are carried out by insiders. Firewalls also have a significant disadvantage in that they restrict how your users can use the Internet. (After all, firewalls are simply a less extreme example of the dictum that there is nothing more secure than a computer which is not connected to the network --- and powered off!) In many places, these restrictions are simply unrealistic and unacceptable.

Kerberos was created by MIT as a solution to these network security problems. The Kerberos protocol uses strong cryptography so that a client can prove its identity to a server (and vice versa) across an insecure network connection. After a client and server have used Kerberos to prove their identity, they can also encrypt all of their communications to assure privacy and data integrity as they go about their business.

Kerberos is freely available from MIT, under a copyright permission notice very similar to the one used for the BSD operating and X11 Windowing system. MIT provides Kerberos in source form, so that anyone who wishes to use it may look over the code for themselves and assure themselves that the code is trustworthy. In addition, for those who prefer to rely on a professional supported product, Kerberos is available as a product from many different vendors.

In summary, Kerberos is a solution to your network security problems. It provides the tools of authentication and strong cryptography over the network to help you secure your information systems across your entire enterprise. We hope you find Kerberos as useful as it has been to us. At MIT, Kerberos has been invaluable to our Information/Technology architecture.

KryptoKnight is a Peer to Peer authentication protocol incorporated into the NetSP product from IBM.

SESAME is an authentication and access control protocol, that also supports communication confidentiality and integrity. It provides public key based authentication along with the Kerberos style authentication, that uses symmetric key cryptography. Sesame supports the Kerberos protocol and adds some security extensions like public key based authentication and an ECMA-style Privilege Attribute Service. The complete Sesame protocol is a two step process. In the first step, the client successfully authenticates itself to the Authentication Server and obtains a ticket that can be presented to the Privilege Attribute Server. In the second step, the initiator obtains proof of his access rights in the form of Privilege Attributes Certificate (PAC). The PAC is a specific form of Access Control Certificate as defined in the ECMA-219 document. This document describes the extensions to Kerberos for public key based authentication as adopted in Sesame. SESAME, KryptoKnight, and NetSP never took off and the protocols are no longer commonly used.

References:

<http://www.cmf.nrl.navy.mil/CCS/people/kenh/kerberos-faq.html#whatis> and

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 40.

**NEW QUESTION 10**

- (Topic 1)

Which of the following access control techniques best gives the security officers the ability to specify and enforce enterprise-specific security policies in a way that maps naturally to an organization's structure?

- A. Access control lists
- B. Discretionary access control
- C. Role-based access control
- D. Non-mandatory access control

**Answer:** C

**Explanation:**

Role-based access control (RBAC) gives the security officers the ability to specify and enforce enterprise-specific security policies in a way that maps naturally to an organization's structure. Each user is assigned one or more roles, and each role is assigned one or more privileges that are given to users in that role. An access control list (ACL) is a table that tells a system which access rights each user has to a particular system object. With discretionary access control, administration is decentralized and owners of resources control other users' access. Non-mandatory access control is not a defined access control technique.

Source: ANDRESS, Mandy, Exam Cram CISSP, Coriolis, 2001, Chapter 2: Access Control Systems and Methodology (page 9).

**NEW QUESTION 10**

- (Topic 1)

In which of the following model are Subjects and Objects identified and the permissions applied to each subject/object combination are specified. Such a model can be used to quickly summarize what permissions a subject has for various system objects.

- A. Access Control Matrix model
- B. Take-Grant model
- C. Bell-LaPadula model
- D. Biba model

**Answer:** A

**Explanation:**

An access control matrix is a table of subjects and objects indicating what actions individual subjects can take upon individual objects. Matrices are data structures that programmers implement as table lookups that will be used and enforced by the operating system.

This type of access control is usually an attribute of DAC models. The access rights can be assigned directly to the subjects (capabilities) or to the objects (ACLs). Capability Table

A capability table specifies the access rights a certain subject possesses pertaining to specific objects. A capability table is different from an ACL because the subject is bound to the capability table, whereas the object is bound to the ACL.

Access control lists (ACLs)

ACLs are used in several operating systems, applications, and router configurations. They are lists of subjects that are authorized to access a specific object, and

they define what level of authorization is granted. Authorization can be specific to an individual, group, or role. ACLs map values from the access control matrix to the object.

Whereas a capability corresponds to a row in the access control matrix, the ACL corresponds to a column of the matrix.

NOTE: Ensure you are familiar with the terms Capability and ACLs for the purpose of the exam.

Resource(s) used for this question:

Harris, Shon (2012-10-25). CISSP All-in-One Exam Guide, 6th Edition (Kindle Locations 5264-5267). McGraw-Hill. Kindle Edition.

or

Harris, Shon (2012-10-25). CISSP All-in-One Exam Guide, 6th Edition, Page 229 and

Hernandez CISSP, Steven (2012-12-21). Official (ISC)2 Guide to the CISSP CBK, Third Edition ((ISC)2 Press) (Kindle Locations 1923-1925). Auerbach Publications. Kindle Edition.

#### NEW QUESTION 15

- (Topic 1)

What does the (star) property mean in the Bell-LaPadula model?

- A. No write up
- B. No read up
- C. No write down
- D. No read down

**Answer: C**

#### Explanation:

The (star) property of the Bell-LaPadula access control model states that writing of information by a subject at a higher level of sensitivity to an object at a lower level of sensitivity is not permitted (no write down).

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 5: Security Architectures and Models (page 202).

Also check out: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw- Hill/Osborne, 2002, Chapter 5: Security Models and Architecture (page 242, 243).

#### NEW QUESTION 16

- (Topic 1)

Rule-Based Access Control (RuBAC) access is determined by rules. Such rules would fit within what category of access control ?

- A. Discretionary Access Control (DAC)
- B. Mandatory Access control (MAC)
- C. Non-Discretionary Access Control (NDAC)
- D. Lattice-based Access control

**Answer: C**

#### Explanation:

Rule-based access control is a type of non-discretionary access control because this access is determined by rules and the subject does not decide what those rules will be, the rules are uniformly applied to ALL of the users or subjects.

In general, all access control policies other than DAC are grouped in the category of non- discretionary access control (NDAC). As the name implies, policies in this category have rules that are not established at the discretion of the user. Non-discretionary policies establish controls that cannot be changed by users, but only through administrative action.

Both Role Based Access Control (RBAC) and Rule Based Access Control (RuBAC) fall within Non Discretionary Access Control (NDAC). If it is not DAC or MAC then it is most likely NDAC.

IT IS NOT ALWAYS BLACK OR WHITE

The different access control models are not totally exclusive of each others. MAC is making use of Rules to be implemented. However with MAC you have requirements above and beyond having simple access rules. The subject would get formal approval from management, the subject must have the proper security clearance, objects must have labels/sensitivity levels attached to them, subjects must have the proper security clearance. If all of this is in place then you have MAC.

BELOW YOU HAVE A DESCRIPTION OF THE DIFFERENT CATEGORIES:

MAC = Mandatory Access Control

Under a mandatory access control environment, the system or security administrator will define what permissions subjects have on objects. The administrator does not dictate user's access but simply configure the proper level of access as dictated by the Data Owner.

The MAC system will look at the Security Clearance of the subject and compare it with the object sensitivity level or classification level. This is what is called the dominance relationship.

The subject must DOMINATE the object sensitivity level. Which means that the subject must have a security clearance equal or higher than the object he is attempting to access.

MAC also introduce the concept of labels. Every objects will have a label attached to them indicating the classification of the object as well as categories that are used to impose the need to know (NTK) principle. Even thou a user has a security clearance of Secret it does not mean he would be able to access any Secret documents within the system. He would be allowed to access only Secret document for which he has a Need To Know, formal approval, and object where the user belong to one of the categories attached to the object.

If there is no clearance and no labels then IT IS NOT Mandatory Access Control.

Many of the other models can mimic MAC but none of them have labels and a dominance relationship so they are NOT in the MAC category.

NISTR-7316 Says:

Usually a labeling mechanism and a set of interfaces are used to determine access based on the MAC policy; for example, a user who is running a process at the Secret classification should not be allowed to read a file with a label of Top Secret. This is known as the "simple security rule" or "no read up." Conversely, a user who is running a process with a label of Secret should not be allowed to write to a file with a label of Confidential. This rule is called the "\*-property" (pronounced "star property") or "no write down." The \*- property is required to maintain system security in an automated environment. A variation on this rule called the "strict \*-property" requires that information can be written at, but not above, the subject's clearance level. Multilevel security models such as the Bell-La Padula Confidentiality and Biba Integrity models are used to formally specify this kind of MAC policy.

DAC = Discretionary Access Control

DAC is also known as: Identity Based access control system.

The owner of an object is define as the person who created the object. As such the owner has the discretion to grant access to other users on the network. Access will be granted based solely on the identity of those users.

Such system is good for low level of security. One of the major problem is the fact that a user who has access to someone's else file can further share the file with other users without the knowledge or permission of the owner of the file. Very quickly this could become the wild wild west as there is no control on the

dissimination of the information.

RBAC = Role Based Access Control

RBAC is a form of Non-Discretionary access control.

Role Based access control usually maps directly with the different types of jobs performed by employees within a company.

For example there might be 5 security administrator within your company. Instead of creating each of their profile one by one, you would simply create a role and assign the administrators to the role. Once an administrator has been assigned to a role, he will IMPLICITLY inherit the permissions of that role.

RBAC is great tool for environment where there is a a large rotation of employees on a daily basis such as a very large help desk for example.

RBAC or RuBAC = Rule Based Access Control RuBAC is a form of Non-Discretionary access control.

A good example of a Rule Based access control device would be a Firewall. A single set of rules is imposed to all users attempting to connect through the firewall.

NOTE FROM CLEMENT:

Lot of people tend to confuse MAC and Rule Based Access Control.

Mandatory Access Control must make use of LABELS. If there is only rules and no label, it cannot be Mandatory Access Control. This is why they call it Non Discretionary Access control (NDAC).

There are even books out there that are WRONG on this subject. Books are sometimes opiated and not strictly based on facts.

In MAC subjects must have clearance to access sensitive objects. Objects have labels that contain the classification to indicate the sensitivity of the object and the label also has categories to enforce the need to know.

Today the best example of rule based access control would be a firewall. All rules are imposed globally to any user attempting to connect through the device. This is NOT the case with MAC.

I strongly recommend you read carefully the following document:

NISTIR-7316 at <http://csrc.nist.gov/publications/nistir/7316/NISTIR-7316.pdf>

It is one of the best Access Control Study document to prepare for the exam. Usually I tell people not to worry about the hundreds of NIST documents and other reference. This document is an exception. Take some time to read it.

Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 33.  
and

NISTIR-7316 at <http://csrc.nist.gov/publications/nistir/7316/NISTIR-7316.pdf> and

Conrad, Eric; Misener, Seth; Feldman, Joshua (2012-09-01). CISSP Study Guide (Kindle Locations 651-652). Elsevier Science (reference). Kindle Edition.

### NEW QUESTION 17

- (Topic 1)

What is the most critical characteristic of a biometric identifying system?

- A. Perceived intrusiveness
- B. Storage requirements
- C. Accuracy
- D. Scalability

**Answer: C**

#### Explanation:

Accuracy is the most critical characteristic of a biometric identifying verification system.

Accuracy is measured in terms of false rejection rate (FRR, or type I errors) and false acceptance rate (FAR or type II errors).

The Crossover Error Rate (CER) is the point at which the FRR equals the FAR and has become the most important measure of biometric system accuracy.

Source: TIPTON, Harold F. & KRAUSE, Micki, Information Security Management Handbook, 4th edition (volume 1), 2000, CRC Press, Chapter 1, Biometric Identification (page 9).

### NEW QUESTION 19

- (Topic 1)

In biometrics, the "one-to-one" search used to verify claim to an identity made by a person is considered:

- A. Authentication
- B. Identification
- C. Auditing
- D. Authorization

**Answer: A**

#### Explanation:

Biometric devices can be use for either IDENTIFICATION or AUTHENTICATION

ONE TO ONE is for AUTHENTICATION

This means that you as a user would provide some biometric credential such as your fingerprint. Then they will compare the template that you have provided with the one stored in the Database. If the two are exactly the same that prove that you are who you pretend to be.

ONE TO MANY is for IDENTIFICATION

A good example of this would be within airport. Many airports today have facial recognition cameras, as you walk through the airport it will take a picture of your face and then compare the template (your face) with a database full of templates and see if there is a match between your template and the ones stored in the Database. This is for IDENTIFICATION of a person.

Some additional clarification or comments that might be helpful are: Biometrics establish authentication using specific information and comparing results to expected data. It does not perform well for identification purposes such as scanning for a person's face in a moving crowd for example.

Identification methods could include: username, user ID, account number, PIN, certificate, token, smart card, biometric device or badge.

Auditing is a process of logging or tracking what was done after the identity and authentication process is completed.

Authorization is the rights the subject is given and is performed after the identity is established.

Reference OIG (2007) p148, 167

Authentication in biometrics is a "one-to-one" search to verify claim to an identity made by a person.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 38.

### NEW QUESTION 21

- (Topic 1)

The number of violations that will be accepted or forgiven before a violation record is produced is called which of the following?

- A. clipping level
- B. acceptance level
- C. forgiveness level
- D. logging level

**Answer:** A

**Explanation:**

The correct answer is "clipping level". This is the point at which a system decides to take some sort of action when an action repeats a preset number of times. That action may be to log the activity, lock a user account, temporarily close a port, etc.

Example: The most classic example of a clipping level is failed login attempts. If you have a system configured to lock a user's account after three failed login attempts, that is the "clipping level".

The other answers are not correct because:

Acceptance level, forgiveness level, and logging level are nonsensical terms that do not exist (to my knowledge) within network security.

Reference:

Official ISC2 Guide - The term "clipping level" is not in the glossary or index of that book. I cannot find it in the text either. However, I'm quite certain that it would be considered part of the CBK, despite its exclusion from the Official Guide.

All in One Third Edition page: 136 - 137

**NEW QUESTION 26**

- (Topic 1)

In discretionary access environments, which of the following entities is authorized to grant information access to other people?

- A. Manager
- B. Group Leader
- C. Security Manager
- D. Data Owner

**Answer:** D

**Explanation:**

In Discretionary Access Control (DAC) environments, the user who creates a file is also considered the owner and has full control over the file including the ability to set permissions for that file.

The following answers are incorrect:

manager. Is incorrect because in Discretionary Access Control (DAC) environments it is the owner/user that is authorized to grant information access to other people.

group leader. Is incorrect because in Discretionary Access Control (DAC) environments it is the owner/user that is authorized to grant information access to other people.

security manager. Is incorrect because in Discretionary Access Control (DAC) environments it is the owner/user that is authorized to grant information access to other people.

IMPORTANT NOTE:

The term Data Owner is also used within Classifications as well. Under the subject of classification the Data Owner is a person from management who has been entrusted with a data set that belongs to the company. For example it could be the Chief Financial Officer (CFO) who is entrusted with all of the financial data for a company. As such the CFO would determine the classification of the financial data and who can access as well. The Data Owner would then tell the Data Custodian (a technical person) what the classification and need to know is on the specific set of data.

The term Data Owner under DAC simply means whoever created the file and as the creator of the file the owner has full access and can grant access to other subjects based on their identity.

**NEW QUESTION 27**

- (Topic 1)

Which integrity model defines a constrained data item, an integrity verification procedure and a transformation procedure?

- A. The Take-Grant model
- B. The Biba integrity model
- C. The Clark Wilson integrity model
- D. The Bell-LaPadula integrity model

**Answer:** C

**Explanation:**

The Clark Wilson integrity model addresses the three following integrity goals: 1) data is protected from modification by unauthorized users; 2) data is protected from unauthorized modification by authorized users; and 3) data is internally and externally consistent. It also defines a Constrained Data Item (CDI), an Integrity Verification Procedure (IVP), a Transformation Procedure (TP) and an Unconstrained Data item. The Bell-LaPadula and Take-Grant models are not integrity models.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 5: Security Architecture and Models (page 205).

**NEW QUESTION 30**

- (Topic 1)

A network-based vulnerability assessment is a type of test also referred to as:

- A. An active vulnerability assessment.
- B. A routing vulnerability assessment.
- C. A host-based vulnerability assessment.
- D. A passive vulnerability assessment.

**Answer:** A

**Explanation:**

A network-based vulnerability assessment tool/system either re-enacts system attacks, noting and recording responses to the attacks, or probes different targets to infer weaknesses from their responses.

Since the assessment is actively attacking or scanning targeted systems, network-based vulnerability assessment systems are also called active vulnerability systems.

There are mostly two main types of test:

**PASSIVE:** You don't send any packet or interact with the remote target. You make use of public database and other techniques to gather information about your target.

**ACTIVE:** You do send packets to your target, you attempt to stimulate response which will help you in gathering information about hosts that are alive, services runnings, port state, and more.

See example below of both types of attacks:

Eavesdropping and sniffing data as it passes over a network are considered passive attacks because the attacker is not affecting the protocol, algorithm, key, message, or any parts of the encryption system. Passive attacks are hard to detect, so in most cases methods are put in place to try to prevent them rather than to detect and stop them.

Altering messages, modifying system files, and masquerading as another individual are acts that are considered active attacks because the attacker is actually doing something instead of sitting back and gathering data. Passive attacks are usually used to gain information prior to carrying out an active attack.

**IMPORTANT NOTE:**

On the commercial vendors will sometimes use different names for different types of scans. However, the exam is product agnostic. They do not use vendor terms but general terms. Experience could trick you into selecting the wrong choice sometimes. See feedback from Jason below:

"I am a system security analyst. It is my daily duty to perform system vulnerability analysis. We use Nessus and Retina (among other tools) to perform our network based vulnerability scanning. Both commercially available tools refer to a network based vulnerability scan as a "credentialed" scan. Without credentials, the scan tool cannot login to the system being scanned, and as such will only receive a port scan to see what ports are open and exploitable"

Reference(s) used for this question:

Harris, Shon (2012-10-18). CISSP All-in-One Exam Guide, 6th Edition (p. 865). McGraw- Hill. Kindle Edition.

and

DUPUIS, Clement, Access Control Systems and Methodology CISSP Open Study Guide, version 1.0, march 2002 (page 97).

### NEW QUESTION 32

- (Topic 1)

Which one of the following authentication mechanisms creates a problem for mobile users?

- A. Mechanisms based on IP addresses
- B. Mechanism with reusable passwords
- C. one-time password mechanism.
- D. challenge response mechanism.

**Answer:** A

#### Explanation:

Anything based on a fixed IP address would be a problem for mobile users because their location and its associated IP address can change from one time to the next. Many providers will assign a new IP every time the device would be restarted. For example an insurance adjuster using a laptop to file claims online. He goes to a different client each time and the address changes every time he connects to the ISP.

**NOTE FROM CLEMENT:**

The term **MOBILE** in this case is synonymous with Road Warriors where a user is constantly traveling and changing location. With smartphone today that may not be an issue but it would be an issue for laptops or WIFI tablets. Within a carrier network the IP will tend to be the same and would change rarely. So this question is more applicable to devices that are not cellular devices but in some cases this issue could affect cellular devices as well.

The following answers are incorrect:

mechanism with reusable password. This is incorrect because reusable password mechanism would not present a problem for mobile users. They are the least secure and change only at specific interval.

one-time password mechanism. This is incorrect because a one-time password mechanism would not present a problem for mobile users. Many are based on a clock and not on the IP address of the user.

challenge response mechanism. This is incorrect because challenge response mechanism would not present a problem for mobile users.

### NEW QUESTION 35

- (Topic 1)

Which of the following access control models is based on sensitivity labels?

- A. Discretionary access control
- B. Mandatory access control
- C. Rule-based access control
- D. Role-based access control

**Answer:** B

#### Explanation:

Access decisions are made based on the clearance of the subject and the sensitivity label of the object.

Example: Eve has a "Secret" security clearance and is able to access the "Mugwump Missile Design Profile" because its sensitivity label is "Secret." She is denied access to the "Presidential Toilet Tissue Formula" because its sensitivity label is "Top Secret."

The other answers are not correct because:

Discretionary Access Control is incorrect because in DAC access to data is determined by the data owner. For example, Joe owns the "Secret Chili Recipe" and grants read access to Charles.

Role Based Access Control is incorrect because in RBAC access decisions are made based on the role held by the user. For example, Jane has the role "Auditor" and that role includes read permission on the "System Audit Log."

Rule Based Access Control is incorrect because it is a form of MAC. A good example would be a Firewall where rules are defined and apply to anyone connecting through the firewall.

References:

All in One third edition, page 164. Official ISC2 Guide page 187.

### NEW QUESTION 38

- (Topic 1)

Logical or technical controls involve the restriction of access to systems and the protection of information. Which of the following statements pertaining to these

types of controls is correct?

- A. Examples of these types of controls include policies and procedures, security awareness training, background checks, work habit checks but do not include a review of vacation history, and also do not include increased supervision.
- B. Examples of these types of controls do not include encryption, smart cards, access lists, and transmission protocols.
- C. Examples of these types of controls are encryption, smart cards, access lists, and transmission protocols.
- D. Examples of these types of controls include policies and procedures, security awareness training, background checks, work habit checks, a review of vacation history, and increased supervision.

**Answer: C**

**Explanation:**

Logical or technical controls involve the restriction of access to systems and the protection of information. Examples of these types of controls are encryption, smart cards, access lists, and transmission protocols.  
Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 33.

**NEW QUESTION 41**

- (Topic 1)

Which of the following can best eliminate dial-up access through a Remote Access Server as a hacking vector?

- A. Using a TACACS+ server.
- B. Installing the Remote Access Server outside the firewall and forcing legitimate users to authenticate to the firewall.
- C. Setting modem ring count to at least 5.
- D. Only attaching modems to non-networked hosts.

**Answer: B**

**Explanation:**

Containing the dial-up problem is conceptually easy: by installing the Remote Access Server outside the firewall and forcing legitimate users to authenticate to the firewall, any access to internal resources through the RAS can be filtered as would any other connection coming from the Internet. The use of a TACACS+ Server by itself cannot eliminate hacking. Setting a modem ring count to 5 may help in defeating war-dialing hackers who look for modem by dialing long series of numbers. Attaching modems only to non-networked hosts is not practical and would not prevent these hosts from being hacked.  
Source: STREBE, Matthew and PERKINS, Charles, Firewalls 24seven, Sybex 2000, Chapter 2: Hackers.

**NEW QUESTION 46**

- (Topic 1)

Organizations should consider which of the following first before allowing external access to their LANs via the Internet?

- A. plan for implementing workstation locking mechanisms.
- B. plan for protecting the modem pool.
- C. plan for providing the user with his account usage information.
- D. plan for considering proper authentication options.

**Answer: D**

**Explanation:**

Before a LAN is connected to the Internet, you need to determine what the access controls mechanisms are to be used, this would include how you are going to authenticate individuals that may access your network externally through access control. The following answers are incorrect:  
plan for implementing workstation locking mechanisms. This is incorrect because locking the workstations have no impact on the LAN or Internet access.  
plan for protecting the modem pool. This is incorrect because protecting the modem pool has no impact on the LAN or Internet access, it just protects the modem.  
plan for providing the user with his account usage information. This is incorrect because the question asks what should be done first. While important your primary concern should be focused on security.

**NEW QUESTION 47**

- (Topic 1)

Which access control model provides upper and lower bounds of access capabilities for a subject?

- A. Role-based access control
- B. Lattice-based access control
- C. Biba access control
- D. Content-dependent access control

**Answer: B**

**Explanation:**

In the lattice model, users are assigned security clearances and the data is classified. Access decisions are made based on the clearance of the user and the classification of the object. Lattice-based access control is an essential ingredient of formal security models such as Bell-LaPadula, Biba, Chinese Wall, etc. The bounds concept comes from the formal definition of a lattice as a "partially ordered set for which every pair of elements has a greatest lower bound and a least upper bound." To see the application, consider a file classified as "SECRET" and a user Joe with a security clearance of "TOP SECRET." Under Bell-LaPadula, Joe's "least upper bound" access to the file is "READ" and his least lower bound is "NO WRITE" (star property). Role-based access control is incorrect. Under RBAC, the access is controlled by the permissions assigned to a role and the specific role assigned to the user. Biba access control is incorrect. The Biba integrity model is based on a lattice structure but the context of the question disqualifies it as the best answer. Content-dependent access control is incorrect. In content dependent access control, the actual content of the information determines access as enforced by the arbiter.  
References:  
CBK, pp. 324-325.  
AIO3, pp. 291-293. See particularly Figure 5-19 on p. 293 for an illustration of bounds in action.

#### NEW QUESTION 50

- (Topic 1)

Which of the following security models does NOT concern itself with the flow of data?

- A. The information flow model
- B. The Biba model
- C. The Bell-LaPadula model
- D. The noninterference model

**Answer:** D

#### Explanation:

The goal of a noninterference model is to strictly separate differing security levels to assure that higher-level actions do not determine what lower-level users can see. This is in contrast to other security models that control information flows between differing levels of users. By maintaining strict separation of security levels, a noninterference model minimizes leakages that might happen through a covert channel.

The Bell-LaPadula model is incorrect. The Bell-LaPadula model is concerned with confidentiality and bases access control decisions on the classification of objects and the clearances of subjects.

The information flow model is incorrect. The information flow models have a similar framework to the Bell-LaPadula model and control how information may flow between objects based on security classes.

The Biba model is incorrect. The Biba model is concerned with integrity and is a complement to the Bell-LaPadula model in that higher levels of integrity are more trusted than lower levels. Access control is based on these integrity levels to assure that read/write operations do not decrease an object's integrity.

References:

CBK, pp 325 - 326

AIO3, pp. 290 - 291

#### NEW QUESTION 51

- (Topic 1)

Which of the following describes the major disadvantage of many Single Sign-On (SSO) implementations?

- A. Once an individual obtains access to the system through the initial log-on, they have access to all resources within the environment that the account has access to.
- B. The initial logon process is cumbersome to discourage potential intruders.
- C. Once a user obtains access to the system through the initial log-on, they only need to logon to some applications.
- D. Once a user obtains access to the system through the initial log-on, he has to logout from all other systems

**Answer:** A

#### Explanation:

Single Sign-On is a distributed Access Control methodology where an individual only has to authenticate once and would have access to all primary and secondary network domains. The individual would not be required to re-authenticate when they needed additional resources. The security issue that this creates is if a fraudster is able to compromise those credentials they too would have access to all the resources that account has access to.

All the other answers are incorrect as they are distractors.

#### NEW QUESTION 55

- (Topic 1)

Which access control model enables the OWNER of the resource to specify what subjects can access specific resources based on their identity?

- A. Discretionary Access Control
- B. Mandatory Access Control
- C. Sensitive Access Control
- D. Role-based Access Control

**Answer:** A

#### Explanation:

Data owners decide who has access to resources based only on the identity of the person accessing the resource.

The following answers are incorrect :

Mandatory Access Control : users and data owners do not have as much freedom to determine who can access files. The operating system makes the final decision and can override the users' wishes and access decisions are based on security labels.

Sensitive Access Control : There is no such access control in the context of the above question.

Role-based Access Control : uses a centrally administered set of controls to determine how subjects and objects interact , also called as non discretionary access control.

In a mandatory access control (MAC) model, users and data owners do not have as much freedom to determine who can access files. The operating system makes the final decision and can override the users' wishes. This model is much more structured and strict and is based on a security label system. Users are given a security clearance (secret, top secret, confidential, and so on), and data is classified in the same way. The clearance and classification data is stored in the security labels, which are bound to the specific subjects and objects. When the system makes a decision about fulfilling a request to access an object, it is based on the clearance of the subject, the classification of the object, and the security policy of the system. The rules for how subjects access objects are made by the security officer, configured by the administrator, enforced by the operating system, and supported by security technologies

Reference : Shon Harris , AIO v3 , Chapter-4 : Access Control , Page : 163-165

#### NEW QUESTION 57

- (Topic 1)

What is called a password that is the same for each log-on session?

- A. "one-time password"
- B. "two-time password"
- C. static password
- D. dynamic password

**Answer:** C

**Explanation:**

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 36.

**NEW QUESTION 62**

- (Topic 1)

Which security model is based on the military classification of data and people with clearances?

- A. Brewer-Nash model
- B. Clark-Wilson model
- C. Bell-LaPadula model
- D. Biba model

**Answer:** C

**Explanation:**

The Bell-LaPadula model is a confidentiality model for information security based on the military classification of data, on people with clearances and data with a classification or sensitivity model. The Biba, Clark-Wilson and Brewer-Nash models are concerned with integrity.

Source: HARE, Chris, Security Architecture and Models, Area 6 CISSP Open Study Guide, January 2002.

**NEW QUESTION 66**

- (Topic 1)

Which of the following would constitute the best example of a password to use for access to a system by a network administrator?

- A. holiday
- B. Christmas12
- C. Jenny
- D. GyN19Za!

**Answer:** D

**Explanation:**

GyN19Za! would be the the best answer because it contains a mixture of upper and lower case characters, alphabetic and numeric characters, and a special character making it less vulnerable to password attacks.

All of the other answers are incorrect because they are vulnerable to brute force or dictionary attacks. Passwords should not be common words or names. The addition of a number to the end of a common word only marginally strengthens it because a common password attack would also check combinations of words: Christmas23 Christmas123 etc...

**NEW QUESTION 71**

- (Topic 1)

Which of the following is not a physical control for physical security?

- A. lighting
- B. fences
- C. training
- D. facility construction materials

**Answer:** C

**Explanation:**

Some physical controls include fences, lights, locks, and facility construction materials. Some administrative controls include facility selection and construction, facility management, personnel controls, training, and emergency response and procedures.

From: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw-Hill/Osborne, 3rd. Ed., Chapter 6, page 403.

**NEW QUESTION 72**

- (Topic 1)

Pin, Password, Passphrases, Tokens, smart cards, and biometric devices are all items that can be used for Authentication. When one of these item listed above in conjunction with a second factor to validate authentication, it provides robust authentication of the individual by practicing which of the following?

- A. Multi-party authentication
- B. Two-factor authentication
- C. Mandatory authentication
- D. Discretionary authentication

**Answer:** B

**Explanation:**

Once an identity is established it must be authenticated. There exist numerous technologies and implementation of authentication methods however they almost all fall under three major areas.

There are three fundamental types of authentication: Authentication by knowledge??something a person knows

Authentication by possession??something a person has

Authentication by characteristic??something a person is Logical controls related to these types are called ??factors.??

Something you know can be a password or PIN, something you have can be a token fob or smart card, and something you are is usually some form of biometrics.

Single-factor authentication is the employment of one of these factors, two-factor authentication is using two of the three factors, and three-factor authentication is the combination of all three factors.

The general term for the use of more than one factor during authentication is multifactor authentication or strong authentication.

Reference(s) used for this question:

Hernandez CISSP, Steven (2012-12-21). Official (ISC)2 Guide to the CISSP CBK, Third Edition ((ISC)2 Press) (Kindle Locations 2367-2379). Auerbach Publications. Kindle Edition.

#### NEW QUESTION 77

- (Topic 1)

The three classic ways of authenticating yourself to the computer security software are by something you know, by something you have, and by something:

- A. you need.
- B. non-trivial
- C. you are.
- D. you can get.

**Answer:** C

#### Explanation:

This is more commonly known as biometrics and is one of the most accurate ways to authenticate an individual. The rest of the answers are incorrect because they not one of the three recognized forms for Authentication.

#### NEW QUESTION 82

- (Topic 1)

Which of the following control pairings include: organizational policies and procedures, pre- employment background checks, strict hiring practices, employment agreements, employee termination procedures, vacation scheduling, labeling of sensitive materials, increased supervision, security awareness training, behavior awareness, and sign-up procedures to obtain access to information systems and networks?

- A. Preventive/Administrative Pairing
- B. Preventive/Technical Pairing
- C. Preventive/Physical Pairing
- D. Detective/Administrative Pairing

**Answer:** A

#### Explanation:

The Answer: Preventive/Administrative Pairing: These mechanisms include organizational policies and procedures, pre-employment background checks, strict hiring practices, employment agreements, friendly and unfriendly employee termination procedures, vacation scheduling, labeling of sensitive materials, increased supervision, security awareness training, behavior awareness, and sign-up procedures to obtain access to information systems and networks.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 34.

#### NEW QUESTION 84

- (Topic 1)

Which of the following was developed by the National Computer Security Center (NCSC) for the US Department of Defense ?

- A. TCSEC
- B. ITSEC
- C. DIACAP
- D. NIACAP

**Answer:** A

#### Explanation:

The Answer TCSEC; The TCSEC, frequently referred to as the Orange Book, is the centerpiece of the DoD Rainbow Series publications.

Initially issued by the National Computer Security Center (NCSC) an arm of the National Security Agency in 1983 and then updated in 1985, TCSEC was replaced with the development of the Common Criteria international standard originally published in 2005.

References:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, pages 197-199.

Wikipedia <http://en.wikipedia.org/wiki/TCSEC>

#### NEW QUESTION 89

- (Topic 1)

Which of the following statements pertaining to biometrics is false?

- A. Increased system sensitivity can cause a higher false rejection rate
- B. The crossover error rate is the point at which false rejection rate equals the false acceptance rate.
- C. False acceptance rate is also known as Type II error.
- D. Biometrics are based on the Type 2 authentication mechanism.

**Answer:** D

#### Explanation:

Authentication is based on three factor types: type 1 is something you know, type 2 is something you have and type 3 is something you are. Biometrics are based on the Type 3 authentication mechanism.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 37).

#### NEW QUESTION 93

- (Topic 1)

In regards to information classification what is the main responsibility of information (data) owner?

- A. determining the data sensitivity or classification level

- B. running regular data backups
- C. audit the data users
- D. periodically check the validity and accuracy of the data

**Answer:** A

**Explanation:**

Making the determination to decide what level of classification the information requires is the main responsibility of the data owner.

The data owner within classification is a person from Management who has been entrusted with a data set that belong to the company. It could be for example the Chief Financial Officer (CFO) who has been entrusted with all financial data or it could be the Human Resource Director who has been entrusted with all Human Resource data. The information owner will decide what classification will be applied to the data based on Confidentiality, Integrity, Availability, Criticality, and Sensitivity of the data.

The Custodian is the technical person who will implement the proper classification on objects in accordance with the Data Owner. The custodian DOES NOT decide what classification to apply, it is the Data Owner who will dictate to the Custodian what is the classification to apply.

NOTE:

The term Data Owner is also used within Discretionary Access Control (DAC). Within DAC it means the person who has created an object. For example, if I create a file on my system then I am the owner of the file and I can decide who else could get access to the file. It is left to my discretion. Within DAC access is granted based solely on the Identity of the subject, this is why sometimes DAC is referred to as Identity Based Access Control.

The other choices were not the best answer

Running regular backups is the responsibility of custodian. Audit the data users is the responsibility of the auditors

Periodically check the validity and accuracy of the data is not one of the data owner responsibility

Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Page 14, Chapter 1: Security Management Practices.

**NEW QUESTION 94**

- (Topic 1)

In the context of Biometric authentication, what is a quick way to compare the accuracy of devices. In general, the device that have the lowest value would be the most accurate. Which of the following would be used to compare accuracy of devices?

- A. the CER is used.
- B. the FRR is used
- C. the FAR is used
- D. the FER is used

**Answer:** A

**Explanation:**

equal error rate or crossover error rate (EER or CER): the rate at which both accept and reject errors are equal. The value of the EER can be easily obtained from the ROC curve. The EER is a quick way to compare the accuracy of devices with different ROC curves. In general, the device with the lowest EER is most accurate.

In the context of Biometric Authentication almost all types of detection permit a system's sensitivity to be increased or decreased during an inspection process. If the system's sensitivity is increased, such as in an airport metal detector, the system becomes increasingly selective and has a higher False Reject Rate (FRR). Conversely, if the sensitivity is decreased, the False Acceptance Rate (FAR) will increase. Thus, to have a valid measure of the system performance, the CrossOver Error Rate (CER) is used.

The following are used as performance metrics for biometric systems:

false accept rate or false match rate (FAR or FMR): the probability that the system incorrectly matches the input pattern to a non-matching template in the database. It measures the percent of invalid inputs which are incorrectly accepted. In case of similarity scale, if the person is imposter in real, but the matching score is higher than the threshold, then he is treated as genuine that increase the FAR and hence performance also depends upon the selection of threshold value.

false reject rate or false non-match rate (FRR or FNMR): the probability that the system fails to detect a match between the input pattern and a matching template in the database. It measures the percent of valid inputs which are incorrectly rejected.

failure to enroll rate (FTE or FER): the rate at which attempts to create a template from an input is unsuccessful. This is most commonly caused by low quality inputs.

failure to capture rate (FTC): Within automatic systems, the probability that the system fails to detect a biometric input when presented correctly.

template capacity: the maximum number of sets of data which can be stored in the system. Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 37. and

Wikipedia at: <https://en.wikipedia.org/wiki/Biometrics>

**NEW QUESTION 95**

- (Topic 1)

What is called the verification that the user's claimed identity is valid and is usually implemented through a user password at log-on time?

- A. Authentication
- B. Identification
- C. Integrity
- D. Confidentiality

**Answer:** A

**Explanation:**

Authentication is verification that the user's claimed identity is valid and is usually implemented through a user password at log-on time.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 36.

**NEW QUESTION 100**

- (Topic 1)

Identification and authentication are the keystones of most access control systems. Identification establishes:

- A. User accountability for the actions on the system.

- B. Top management accountability for the actions on the system.
- C. EDP department accountability for the actions of users on the system.
- D. Authentication for actions on the system

**Answer:** A

**Explanation:**

Identification and authentication are the keystones of most access control systems. Identification establishes user accountability for the actions on the system. The control environment can be established to log activity regarding the identification, authentication, authorization, and use of privileges on a system. This can be used to detect the occurrence of errors, the attempts to perform an unauthorized action, or to validate when provided credentials were exercised. The logging system as a detective device provides evidence of actions (both successful and unsuccessful) and tasks that were executed by authorized users.

Once a person has been identified through the user ID or a similar value, she must be authenticated, which means she must prove she is who she says she is. Three general factors can be used for authentication: something a person knows, something a person has, and something a person is. They are also commonly called authentication by knowledge, authentication by ownership, and authentication by characteristic.

For a user to be able to access a resource, he first must prove he is who he claims to be, has the necessary credentials, and has been given the necessary rights or privileges to perform the actions he is requesting. Once these steps are completed successfully, the user can access and use network resources; however, it is necessary to track the user's activities and enforce accountability for his actions.

Identification describes a method of ensuring that a subject (user, program, or process) is the entity it claims to be. Identification can be provided with the use of a username or account number. To be properly authenticated, the subject is usually required to provide a second piece to the credential set. This piece could be a password, passphrase,

cryptographic key, personal identification number (PIN), anatomical attribute, or token.

These two credential items are compared to information that has been previously stored for this subject. If these credentials match the stored information, the subject is authenticated. But we are not done yet. Once the subject provides its credentials and is properly identified, the system it is trying to access needs to determine if this subject has been given the necessary rights and privileges to carry out the requested actions. The system will look at some type of access control matrix or compare security labels to verify that this subject may indeed access the requested resource and perform the actions it is attempting. If the system determines that the subject may access the resource, it authorizes the subject.

Although identification, authentication, authorization, and accountability have close and complementary definitions, each has distinct functions that fulfill a specific requirement in the process of access control. A user may be properly identified and authenticated to the network, but he may not have the authorization to access the files on the file server. On the other hand, a user may be authorized to access the files on the file server, but until she is properly identified and authenticated, those resources are out of reach.

Reference(s) used for this question:

Schneiter, Andrew (2013-04-15). Official (ISC)2 Guide to the CISSP CBK, Third Edition: Access Control ((ISC)2 Press) (Kindle Locations 889-892). Auerbach Publications. Kindle Edition.

and

Harris, Shon (2012-10-25). CISSP All-in-One Exam Guide, 6th Edition (Kindle Locations 3875-3878). McGraw-Hill. Kindle Edition.

and

Harris, Shon (2012-10-25). CISSP All-in-One Exam Guide, 6th Edition (Kindle Locations 3833-3848). McGraw-Hill. Kindle Edition.

and

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 36.

**NEW QUESTION 102**

- (Topic 1)

When submitting a passphrase for authentication, the passphrase is converted into ...

- A. a virtual password by the system
- B. a new passphrase by the system
- C. a new passphrase by the encryption technology
- D. a real password by the system which can be used forever

**Answer:** A

**Explanation:**

Passwords can be compromised and must be protected. In the ideal case, a password should only be used once. The changing of passwords can also fall between these two extremes.

Passwords can be required to change monthly, quarterly, or at other intervals, depending on the criticality of the information needing protection and the password's frequency of use.

Obviously, the more times a password is used, the more chance there is of it being compromised.

It is recommended to use a passphrase instead of a password. A passphrase is more resistant to attacks. The passphrase is converted into a virtual password by the system. Often time the passphrase will exceed the maximum length supported by the system and it must be truncated into a Virtual Password.

Reference(s) used for this question: <http://www.itl.nist.gov/fipspubs/fip112.htm>

and

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 36 & 37.

**NEW QUESTION 104**

- (Topic 1)

Which of the following is not a security goal for remote access?

- A. Reliable authentication of users and systems
- B. Protection of confidential data
- C. Easy to manage access control to systems and network resources
- D. Automated login for remote users

**Answer:** D

**Explanation:**

An automated login function for remote users would imply a weak authentication, thus certainly not a security goal.

Source: TIPTON, Harold F. & KRAUSE, Micki, Information Security Management Handbook, 4th edition, volume 2, 2001, CRC Press, Chapter 5: An Introduction to Secure Remote Access (page 100).

**NEW QUESTION 106**

- (Topic 1)

In the CIA triad, what does the letter A stand for?

- A. Auditability
- B. Accountability
- C. Availability
- D. Authentication

**Answer:** C

**Explanation:**

The CIA triad stands for Confidentiality, Integrity and Availability.

#### NEW QUESTION 111

- (Topic 1)

In biometric identification systems, at the beginning, it was soon apparent that truly positive identification could only be based on physical attributes of a person. This raised the necessity of answering 2 questions :

- A. what was the sex of a person and his age
- B. what part of body to be used and how to accomplish identification that is viable
- C. what was the age of a person and his income level
- D. what was the tone of the voice of a person and his habits

**Answer:** B

**Explanation:**

Today implementation of fast, accurate reliable and user-acceptable biometric identification systems is already taking place. Unique physical attributes or behavior of a person are used for that purpose.

From: TIPTON, Harold F. & KRAUSE, MICKI, Information Security Management Handbook, 4th Edition, Volume 1, Page 7.

#### NEW QUESTION 114

- (Topic 1)

Which of the following forms of authentication would most likely apply a digital signature algorithm to every bit of data that is sent from the claimant to the verifier?

- A. Dynamic authentication
- B. Continuous authentication
- C. Encrypted authentication
- D. Robust authentication

**Answer:** B

**Explanation:**

Continuous authentication is a type of authentication that provides protection against impostors who can see, alter, and insert information passed between the claimant and verifier even after the claimant/verifier authentication is complete. These are typically referred to as active attacks, since they assume that the imposter can actively influence the connection between claimant and verifier. One way to provide this form of authentication is to apply a digital signature algorithm to every bit of data that is sent from the claimant to the verifier. There are other combinations of cryptography that can provide this form of authentication but current strategies rely on applying some type of cryptography to every bit

of data sent. Otherwise, any unprotected bit would be suspect. Robust authentication relies on dynamic authentication data that changes with each authenticated session between a claimant and a verifier, but does not provide protection against active attacks. Encrypted authentication is a distracter.

Source: GUTTMAN, Barbara & BAGWILL, Robert, NIST Special Publication 800-xx, Internet Security Policy: A Technical Guide, Draft Version, May 25, 2000 (page 34).

#### NEW QUESTION 117

- (Topic 1)

Which of the following statements pertaining to access control is false?

- A. Users should only access data on a need-to-know basis.
- B. If access is not explicitly denied, it should be implicitly allowed.
- C. Access rights should be granted based on the level of trust a company has on a subject.
- D. Roles can be an efficient way to assign rights to a type of user who performs certain tasks.

**Answer:** B

**Explanation:**

Access control mechanisms should default to no access to provide the necessary level of security and ensure that no security holes go unnoticed. If access is not explicitly allowed, it should be implicitly denied.

Source: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw- Hill/Osborne, 2002, Chapter 4: Access Control (page 143).

#### NEW QUESTION 118

- (Topic 1)

A department manager has read access to the salaries of the employees in his/her department but not to the salaries of employees in other departments. A database security mechanism that enforces this policy would typically be said to provide which of the following?

- A. Content-dependent access control
- B. Context-dependent access control
- C. Least privileges access control
- D. Ownership-based access control

**Answer:** A

**Explanation:**

When access control is based on the content of an object, it is considered to be content dependent access control.

Content-dependent access control is based on the content itself. The following answers are incorrect:

context-dependent access control. Is incorrect because this type of control is based on what the context is, facts about the data rather than what the object contains.

least privileges access control. Is incorrect because this is based on the least amount of rights needed to perform their jobs and not based on what is contained in the database. ownership-based access control. Is incorrect because this is based on the owner of the data and not based on what is contained in the database.

References:

OIG CBK Access Control (page 191)

**NEW QUESTION 123**

- (Topic 1)

Which of the following attacks could capture network user passwords?

- A. Data diddling
- B. Sniffing
- C. IP Spoofing
- D. Smurfing

**Answer: B**

**Explanation:**

A network sniffer captures a copy every packet that traverses the network segment the sniffer is connect to.

Sniffers are typically devices that can collect information from a communication medium, such as a network. These devices can range from specialized equipment to basic workstations with customized software.

A sniffer can collect information about most, if not all, attributes of the communication. The most common method of sniffing is to plug a sniffer into an existing network device like a hub or switch. A hub (which is designed to relay all traffic passing through it to all of its ports) will automatically begin sending all the traffic on that network segment to the sniffing device. On the other hand, a switch (which is designed to limit what traffic gets sent to which port) will have to be specially configured to send all traffic to the port where the sniffer is plugged in.

Another method for sniffing is to use a network tap??a device that literally splits a network transmission into two identical streams; one going to the original network destination and the other going to the sniffing device. Each of these methods has its advantages and disadvantages, including cost, feasibility, and the desire to maintain the secrecy of the sniffing activity.

The packets captured by sniffer are decoded and then displayed by the sniffer. Therefore, if the username/password are contained in a packet or packets traversing the segment the sniffer is connected to, it will capture and display that information (and any other information on that segment it can see).

Of course, if the information is encrypted via a VPN, SSL, TLS, or similar technology, the information is still captured and displayed, but it is in an unreadable format.

The following answers are incorrect:

Data diddling involves changing data before, as it is entered into a computer, or after it is extracted.

Spoofing is forging an address and inserting it into a packet to disguise the origin of the communication - or causing a system to respond to the wrong address.

Smurfing would refer to the smurf attack, where an attacker sends spoofed packets to the broadcast address on a gateway in order to cause a denial of service.

The following reference(s) were/was used to create this question: CISA Review manual 2014 Page number 321

Official ISC2 Guide to the CISSP 3rd edition Page Number 153

**NEW QUESTION 124**

- (Topic 1)

In biometric identification systems, at the beginning, it was soon apparent that truly positive identification could only be based on :

- A. sex of a person
- B. physical attributes of a person
- C. age of a person
- D. voice of a person

**Answer: B**

**Explanation:**

Today implementation of fast, accurate reliable and user-acceptable biometric identification systems is already under way.

From: TIPTON, Harold F. & KRAUSE, MICKI, Information Security Management Handbook, 4th Edition, Volume 1, Page 7.

**NEW QUESTION 127**

- (Topic 1)

The Orange Book is founded upon which security policy model?

- A. The Biba Model
- B. The Bell LaPadula Model
- C. Clark-Wilson Model
- D. TEMPEST

**Answer: B**

**Explanation:**

From the glossary of Computer Security Basics:

The Bell-LaPadula model is the security policy model on which the Orange Book requirements are based. From the Orange Book definition, "A formal state transition model of computer security policy that describes a set of access control rules. In this formal model, the entities in a computer system are divided into abstract sets of subjects and objects. The notion of secure state is defined and it is proven that each state transition preserves security by moving from secure state to secure state; thus, inductively proving the system is secure. A system state is defined to be 'secure' if the only permitted access modes of subjects to objects are in accordance with a specific security policy. In order to determine whether or not a specific access mode is allowed, the clearance of a subject is compared to the classification of the object and a determination is made as to whether the subject is authorized for the specific access mode."

The Biba Model is an integrity model of computer security policy that describes a set of rules. In this model, a subject may not depend on any object or other subject that is less trusted than itself.

The Clark Wilson Model is an integrity model for computer security policy designed for a commercial environment. It addresses such concepts as nondiscretionary access control, privilege separation, and least privilege. TEMPEST is a government program that prevents the compromising electrical and electromagnetic signals that emanate from computers and related equipment from being intercepted and deciphered.

Source: RUSSEL, Deborah & GANGEMI, G.T. Sr., Computer Security Basics, O'Reilly, 1991.

Also: U.S. Department of Defense, Trusted Computer System Evaluation Criteria (Orange Book), DOD 5200.28-STD. December 1985 (also available here).

#### NEW QUESTION 132

- (Topic 1)

Which of the following Operation Security controls is intended to prevent unauthorized intruders from internally or externally accessing the system, and to lower the amount and impact of unintentional errors that are entering the system?

- A. Detective Controls
- B. Preventative Controls
- C. Corrective Controls
- D. Directive Controls

**Answer: B**

#### Explanation:

In the Operations Security domain, Preventative Controls are designed to prevent unauthorized intruders from internally or externally accessing the system, and to lower the amount and impact of unintentional errors that are entering the system. Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 217.

#### NEW QUESTION 135

- (Topic 1)

Which of the following floors would be most appropriate to locate information processing facilities in a 6-stories building?

- A. Basement
- B. Ground floor
- C. Third floor
- D. Sixth floor

**Answer: C**

#### Explanation:

Your data center should be located in the middle of the facility or the core of a building to provide protection from natural disasters or bombs and provide easier access to emergency crewmembers if necessary. By being at the core of the facility the external wall would act as a secondary layer of protection as well. Information processing facilities should not be located on the top floors of buildings in case of a fire or flooding coming from the roof. Many crimes and theft have also been conducted by simply cutting a large hole on the roof.

They should not be in the basement because of flooding where water has a natural tendency to flow down :-). Even a little amount of water would affect your operation

considering the quantity of electrical cabling sitting directly on the cement floor under your raised floor.

The data center should not be located on the first floor due to the presence of the main entrance where people are coming in and out. You have a lot of high traffic areas such as the elevators, the loading docks, cafeteria, coffee shop, etc.. Really a bad location for a data center.

So it was easy to come up with the answer by using the process of elimination where the top, the bottom, and the basement are all bad choices. That left you with only one possible answer which is the third floor.

Source: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, 5th Edition, Page 425.

#### NEW QUESTION 136

- (Topic 1)

Which of the following choices describe a Challenge-response tokens generation?

- A. A workstation or system that generates a random challenge string that the user enters into the token when prompted along with the proper PIN.
- B. A workstation or system that generates a random login id that the user enters when prompted along with the proper PIN.
- C. A special hardware device that is used to generate random text in a cryptography system.
- D. The authentication mechanism in the workstation or system does not determine if the owner should be authenticated.

**Answer: A**

#### Explanation:

Challenge-response tokens are:

- A workstation or system generates a random challenge string and the owner enters the string into the token along with the proper PIN.
- The token generates a response that is then entered into the workstation or system.
- The authentication mechanism in the workstation or system then determines if the owner should be authenticated.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 37.

Also: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw-Hill/Osborne, 2002, chapter 4: Access Control (pages 136-137).

#### NEW QUESTION 137

- (Topic 1)

In addition to the accuracy of the biometric systems, there are other factors that must also be considered:

- A. These factors include the enrollment time and the throughput rate, but not acceptability.
- B. These factors do not include the enrollment time, the throughput rate, and acceptability.
- C. These factors include the enrollment time, the throughput rate, and acceptability.
- D. These factors include the enrollment time, but not the throughput rate, neither the acceptability.

**Answer: C**

#### Explanation:

In addition to the accuracy of the biometric systems, there are other factors that must also be considered. These factors include the enrollment time, the throughput rate, and acceptability. Enrollment time is the time it takes to initially "register" with a system by providing samples of the biometric characteristic to be evaluated. An acceptable enrollment time is around two minutes.

For example, in fingerprint systems, the actual fingerprint is stored and requires approximately 250kb per finger for a high quality image. This level of information is required for one-to-many searches in forensics applications on very large databases.

In finger-scan technology, a full fingerprint is not stored-the features extracted from this fingerprint are stored using a small template that requires approximately 500 to 1000 bytes of storage. The original fingerprint cannot be reconstructed from this template.

Updates of the enrollment information may be required because some biometric characteristics, such as voice and signature, may change with time.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 37 & 38.

#### NEW QUESTION 142

- (Topic 1)

Which of the following is an example of discretionary access control?

- A. Identity-based access control
- B. Task-based access control
- C. Role-based access control
- D. Rule-based access control

**Answer:** A

#### Explanation:

An identity-based access control is an example of discretionary access control that is based on an individual's identity. Identity-based access control (IBAC) is access control based on the identity of the user (typically relayed as a characteristic of the process acting on behalf of that user) where access authorizations to specific objects are assigned based on user identity.

Rule Based Access Control (RuBAC) and Role Based Access Control (RBAC) are examples of non-discretionary access controls.

Rule-based access control is a type of non-discretionary access control because this access is determined by rules and the subject does not decide what those rules will be, the rules are uniformly applied to ALL of the users or subjects.

In general, all access control policies other than DAC are grouped in the category of non- discretionary access control (NDAC). As the name implies, policies in this category have rules that are not established at the discretion of the user. Non-discretionary policies establish controls that cannot be changed by users, but only through administrative action.

Both Role Based Access Control (RBAC) and Rule Based Access Control (RuBAC) fall within Non Discretionary Access Control (NDAC). If it is not DAC or MAC then it is most likely NDAC.

BELOW YOU HAVE A DESCRIPTION OF THE DIFFERENT CATEGORIES:

MAC = Mandatory Access Control

Under a mandatory access control environment, the system or security administrator will define what permissions subjects have on objects. The administrator does not dictate user's access but simply configure the proper level of access as dictated by the Data Owner.

The MAC system will look at the Security Clearance of the subject and compare it with the object sensitivity level or classification level. This is what is called the dominance relationship.

The subject must DOMINATE the object sensitivity level. Which means that the subject must have a security clearance equal or higher than the object he is attempting to access.

MAC also introduce the concept of labels. Every objects will have a label attached to them indicating the classification of the object as well as categories that are used to impose the need to know (NTK) principle. Even thou a user has a security clearance of Secret it does not mean he would be able to access any Secret documents within the system. He would be allowed to access only Secret document for which he has a Need To Know, formal approval, and object where the user belong to one of the categories attached to the object.

If there is no clearance and no labels then IT IS NOT Mandatory Access Control.

Many of the other models can mimic MAC but none of them have labels and a dominance relationship so they are NOT in the MAC category.

DAC = Discretionary Access Control

DAC is also known as: Identity Based access control system.

The owner of an object is define as the person who created the object. As such the owner has the discretion to grant access to other users on the network. Access will be granted based solely on the identity of those users.

Such system is good for low level of security. One of the major problem is the fact that a user who has access to someone's else file can further share the file with other users without the knowledge or permission of the owner of the file. Very quickly this could become the wild wild west as there is no control on the dissimination of the information.

RBAC = Role Based Access Control

RBAC is a form of Non-Discretionary access control.

Role Based access control usually maps directly with the different types of jobs performed by employees within a company.

For example there might be 5 security administrator within your company. Instead of creating each of their profile one by one, you would simply create a role and assign the administrators to the role. Once an administrator has been assigned to a role, he will IMPLICITLY inherit the permissions of that role.

RBAC is great tool for environment where there is a a large rotation of employees on a daily basis such as a very large help desk for example.

RBAC or RuBAC = Rule Based Access Control RuBAC is a form of Non-Discretionary access control.

A good example of a Rule Based access control device would be a Firewall. A single set of rules is imposed to all users attempting to connect through the firewall.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 33. and

NISTIR-7316 at <http://csrc.nist.gov/publications/nistir/7316/NISTIR-7316.pdf> and

[http://itlaw.wikia.com/wiki/Identity-based\\_access\\_control](http://itlaw.wikia.com/wiki/Identity-based_access_control)

#### NEW QUESTION 147

- (Topic 1)

Which type of control is concerned with avoiding occurrences of risks?

- A. Deterrent controls
- B. Detective controls
- C. Preventive controls
- D. Compensating controls

**Answer:** C

**Explanation:**

Preventive controls are concerned with avoiding occurrences of risks while deterrent controls are concerned with discouraging violations. Detecting controls identify occurrences and compensating controls are alternative controls, used to compensate weaknesses in other controls. Supervision is an example of compensating control. Source: TIPTON, Hal, (ISC)2, Introduction to the CISSP Exam presentation.

**NEW QUESTION 150**

- (Topic 1)

Which of the following is not a two-factor authentication mechanism?

- A. Something you have and something you know.
- B. Something you do and a password.
- C. A smartcard and something you are.
- D. Something you know and a password.

**Answer:** D

**Explanation:**

Something you know and a password fits within only one of the three ways authentication could be done. A password is an example of something you know, thereby something you know and a password does not constitute a two-factor authentication as both are in the same category of factors.

A two-factor (strong) authentication relies on two different kinds of authentication factors out of a list of three possible choice:

something you know (e.g. a PIN or password),

something you have (e.g. a smart card, token, magnetic card),

something you are is mostly Biometrics (e.g. a fingerprint) or something you do (e.g. signature dynamics).

TIP FROM CLEMENT:

On the real exam you can expect to see synonyms and sometimes sub-categories under the main categories. People are familiar with Pin, Passphrase, Password as subset of Something you know.

However, when people see choices such as Something you do or Something you are they immediately get confused and they do not think of them as subset of Biometrics where you have Biometric implementation based on behavior and physiological attributes. So something you do falls under the Something you are category as a subset.

Something you do would be signing your name or typing text on your keyboard for example.

Strong authentication is simply when you make use of two factors that are within two different categories.

Reference(s) used for this question:

Shon Harris, CISSP All In One, Fifth Edition, pages 158-159

**NEW QUESTION 153**

- (Topic 1)

In an organization where there are frequent personnel changes, non-discretionary access control using Role Based Access Control (RBAC) is useful because:

- A. people need not use discretion
- B. the access controls are based on the individual's role or title within the organization.
- C. the access controls are not based on the individual's role or title within the organization
- D. the access controls are often based on the individual's role or title within the organization

**Answer:** B

**Explanation:**

In an organization where there are frequent personnel changes, non- discretionary access control (also called Role Based Access Control) is useful because the access controls are based on the individual's role or title within the organization. You can easily configure a new employee access by assigning the user to a role that has been predefined. The user will implicitly inherit the permissions of the role by being a member of that role.

These access permissions defined within the role do not need to be changed whenever a new person takes over the role.

Another type of non-discretionary access control model is the Rule Based Access Control (RBAC or RuBAC) where a global set of rule is uniformly applied to all subjects accessing the resources. A good example of RuBAC would be a firewall.

This question is a sneaky one, one of the choice has only one added word to it which is often. Reading questions and their choices very carefully is a must for the real exam. Reading it twice if needed is recommended.

Shon Harris in her book list the following ways of managing RBAC: Role-based access control can be managed in the following ways:

Non-RBAC Users are mapped directly to applications and no roles are used. (No roles being used)

Limited RBAC Users are mapped to multiple roles and mapped directly to other types of applications that do not have role-based access functionality. (A mix of roles for applications that supports roles and explicit access control would be used for applications that do not support roles)

Hybrid RBAC Users are mapped to multiapplication roles with only selected rights assigned to those roles.

Full RBAC Users are mapped to enterprise roles. (Roles are used for all access being granted)

NIST defines RBAC as:

Security administration can be costly and prone to error because administrators usually specify access control lists for each user on the system individually. With RBAC, security is managed at a level that corresponds closely to the organization's structure. Each user is assigned one or more roles, and each role is assigned one or more privileges that are permitted to users in that role. Security administration with RBAC consists of determining the operations that must be executed by persons in particular jobs, and assigning employees to the proper roles. Complexities introduced by mutually exclusive roles or role hierarchies are handled by the RBAC software, making security administration easier.

Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 32.

and

Harris, Shon (2012-10-25). CISSP All-in-One Exam Guide, 6th Edition McGraw-Hill. and

<http://csrc.nist.gov/groups/SNS/rbac/>

**NEW QUESTION 156**

- (Topic 1)

Why should batch files and scripts be stored in a protected area?

- A. Because of the least privilege concept.

- B. Because they cannot be accessed by operators.
- C. Because they may contain credentials.
- D. Because of the need-to-know concept.

**Answer:** C

**Explanation:**

Because scripts contain credentials, they must be stored in a protected area and the transmission of the scripts must be dealt with carefully. Operators might need access to batch files and scripts. The least privilege concept requires that each subject in a system be granted the most restrictive set of privileges needed for the performance of authorized tasks. The need-to-know principle requires a user having necessity for access to, knowledge of, or possession of specific information required to perform official tasks or services.

Source: WALLHOFF, John, CISSP Summary 2002, April 2002, CBK#1 Access Control System & Methodology (page 3)

**NEW QUESTION 158**

- (Topic 1)

Kerberos can prevent which one of the following attacks?

- A. tunneling attack.
- B. playback (replay) attack.
- C. destructive attack.
- D. process attack.

**Answer:** B

**Explanation:**

Each ticket in Kerberos has a timestamp and are subject to time expiration to help prevent these types of attacks. The following answers are incorrect:

tunneling attack. This is incorrect because a tunneling attack is an attempt to bypass security and access low-level systems. Kerberos cannot totally prevent these types of attacks.

destructive attack. This is incorrect because depending on the type of destructive attack, Kerberos cannot prevent someone from physically destroying a server.

process attack. This is incorrect because with Kerberos cannot prevent an authorized individuals from running processes.

**NEW QUESTION 159**

- (Topic 1)

What is called a sequence of characters that is usually longer than the allotted number for a password?

- A. passphrase
- B. cognitive phrase
- C. anticipated phrase
- D. Real phrase

**Answer:** A

**Explanation:**

A passphrase is a sequence of characters that is usually longer than the allotted number for a password.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, page 37.

**NEW QUESTION 162**

- (Topic 1)

Which of the following is not a logical control when implementing logical access security?

- A. access profiles.
- B. userids.
- C. employee badges.
- D. passwords.

**Answer:** C

**Explanation:**

Employee badges are considered Physical so would not be a logical control. The following answers are incorrect:

userids. Is incorrect because userids are a type of logical control.

access profiles. Is incorrect because access profiles are a type of logical control. passwords. Is incorrect because passwords are a type of logical control.

**NEW QUESTION 166**

- (Topic 1)

This is a common security issue that is extremely hard to control in large environments. It occurs when a user has more computer rights, permissions, and access than what is required for the tasks the user needs to fulfill. What best describes this scenario?

- A. Excessive Rights
- B. Excessive Access
- C. Excessive Permissions
- D. Excessive Privileges

**Answer:** D

**Explanation:**

Even thou all 4 terms are very close to each other, the best choice is Excessive Privileges which would include the other three choices presented.

Reference(s) used for this question:

HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw-Hill/Osborne, 2001, Page 645.  
and

#### NEW QUESTION 168

- (Topic 1)

What physical characteristic does a retinal scan biometric device measure?

- A. The amount of light reaching the retina
- B. The amount of light reflected by the retina
- C. The pattern of light receptors at the back of the eye
- D. The pattern of blood vessels at the back of the eye

**Answer:** D

#### Explanation:

The retina, a thin nerve (1/50th of an inch) on the back of the eye, is the part of the eye which senses light and transmits impulses through the optic nerve to the brain - the equivalent of film in a camera. Blood vessels used for biometric identification are located along the neural retina, the outermost of retina's four cell layers.

The following answers are incorrect:

The amount of light reaching the retina The amount of light reaching the retina is not used in the biometric scan of the retina.

The amount of light reflected by the retina The amount of light reflected by the retina is not used in the biometric scan of the retina.

The pattern of light receptors at the back of the eye This is a distractor The following reference(s) were/was used to create this question: Reference: Retina Scan Technology.

ISC2 Official Guide to the CBK, 2007 (Page 161)

#### NEW QUESTION 170

- (Topic 1)

Which of the following is the FIRST step in protecting data's confidentiality?

- A. Install a firewall
- B. Implement encryption
- C. Identify which information is sensitive
- D. Review all user access rights

**Answer:** C

#### Explanation:

In order to protect the confidentiality of the data. The following answers are incorrect because :

Install a firewall is incorrect as this would come after the information has been identified for sensitivity levels.

Implement encryption is also incorrect as this is one of the mechanisms to protect the data once it has been identified.

Review all user access rights is also incorrect as this is also a protection mechanism for the identified information.

Reference : Shon Harris AIO v3 , Chapter-4 : Access Control , Page : 126

#### NEW QUESTION 173

- (Topic 1)

Which of the following access control models requires defining classification for objects?

- A. Role-based access control
- B. Discretionary access control
- C. Identity-based access control
- D. Mandatory access control

**Answer:** D

#### Explanation:

With mandatory access control (MAC), the authorization of a subject's access to an object is dependant upon labels, which indicate the subject's clearance, and classification of objects.

The Following answers were incorrect:

Identity-based Access Control is a type of Discretionary Access Control (DAC), they are synonymous.

Role Based Access Control (RBAC) and Rule Based Access Control (RuBAC or RBAC) are types of Non Discretionary Access Control (NDAC).

Tip:

When you have two answers that are synonymous they are not the right choice for sure.

There is only one access control model that makes use of Label, Clearances, and Categories, it is Mandatory Access Control, none of the other one makes use of those items.

Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 33).

#### NEW QUESTION 176

- (Topic 1)

Which of the following can be defined as a framework that supports multiple, optional authentication mechanisms for PPP, including cleartext passwords, challenge-response, and arbitrary dialog sequences?

- A. Extensible Authentication Protocol
- B. Challenge Handshake Authentication Protocol
- C. Remote Authentication Dial-In User Service
- D. Multilevel Authentication Protocol.

**Answer:** A

**Explanation:**

RFC 2828 (Internet Security Glossary) defines the Extensible Authentication Protocol as a framework that supports multiple, optional authentication mechanisms for PPP, including cleartext passwords, challenge-response, and arbitrary dialog sequences. It is intended for use primarily by a host or router that connects to a PPP network server via switched circuits or dial-up lines. The Remote Authentication Dial-In User Service (RADIUS) is defined as an Internet protocol for carrying dial-in user's authentication information and configuration information between a shared, centralized authentication server and a network access server that needs to authenticate the users of its network access ports. The other option is a distracter.

Source: SHIREY, Robert W., RFC2828: Internet Security Glossary, may 2000.

**NEW QUESTION 181**

- (Topic 1)

Examples of types of physical access controls include all EXCEPT which of the following?

- A. badges
- B. locks
- C. guards
- D. passwords

**Answer: D**

**Explanation:**

Passwords are considered a Preventive/Technical (logical) control. The following answers are incorrect:

badges Badges are a physical control used to identify an individual. A badge can include a smart device which can be used for authentication and thus a Technical control, but the actual badge itself is primarily a physical control.

locks Locks are a Preventative Physical control and has no Technical association. guards Guards are a Preventative Physical control and has no Technical association.

The following reference(s) were/was used to create this question:

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 35).

**NEW QUESTION 185**

- (Topic 1)

What is one disadvantage of content-dependent protection of information?

- A. It increases processing overhead.
- B. It requires additional password entry.
- C. It exposes the system to data locking.
- D. It limits the user's individual address space.

**Answer: A**

**Explanation:**

Source: TIPTON, Hal, (ISC)2, Introduction to the CISSP Exam presentation.

**NEW QUESTION 188**

- (Topic 1)

The following is NOT a security characteristic we need to consider while choosing a biometric identification systems:

- A. data acquisition process
- B. cost
- C. enrollment process
- D. speed and user interface

**Answer: B**

**Explanation:**

Cost is a factor when considering Biometrics but it is not a security characteristic.

All the other answers are incorrect because they are security characteristics related to Biometrics.

data acquisition process can cause a security concern because if the process is not fast and efficient it can discourage individuals from using the process.

enrollment process can cause a security concern because the enrollment process has to be quick and efficient. This process captures data for authentication.

speed and user interface can cause a security concern because this also impacts the users acceptance rate of biometrics. If they are not comfortable with the interface and speed they might sabotage the devices or otherwise attempt to circumvent them.

References:

OIG Access Control (Biometrics) (pgs 165-167)

From: TIPTON, Harold F. & KRAUSE, MICKI, Information Security Management Handbook, 4th Edition, Volume 1, Pages 5-6.

in process of correction

**NEW QUESTION 189**

- (Topic 1)

Because all the secret keys are held and authentication is performed on the Kerberos TGS and the authentication servers, these servers are vulnerable to:

- A. neither physical attacks nor attacks from malicious code.
- B. physical attacks only
- C. both physical attacks and attacks from malicious code.
- D. physical attacks but not attacks from malicious code.

**Answer: C**

**Explanation:**

Since all the secret keys are held and authentication is performed on the Kerberos TGS and the authentication servers, these servers are vulnerable to both

physical attacks and attacks from malicious code.

Because a client's password is used in the initiation of the Kerberos request for the service protocol, password guessing can be used to impersonate a client.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 42.

### NEW QUESTION 193

- (Topic 1)

When a biometric system is used, which error type deals with the possibility of GRANTING access to impostors who should be REJECTED?

- A. Type I error
- B. Type II error
- C. Type III error
- D. Crossover error

**Answer: B**

#### Explanation:

When the biometric system accepts impostors who should have been rejected, it is called a Type II error or False Acceptance Rate or False Accept Rate.

Biometrics verifies an individual's identity by analyzing a unique personal attribute or behavior, which is one of the most effective and accurate methods of verifying identification.

Biometrics is a very sophisticated technology; thus, it is much more expensive and complex than the other types of identity verification processes. A biometric system can make authentication decisions based on an individual's behavior, as in signature dynamics, but these can change over time and possibly be forged. Biometric systems that base authentication decisions on physical attributes (iris, retina, fingerprint) provide more accuracy, because physical attributes typically don't change much, absent some disfiguring injury, and are harder to impersonate.

When a biometric system rejects an authorized individual, it is called a Type I error (False Rejection Rate (FRR) or False Reject Rate (FRR)).

When the system accepts impostors who should be rejected, it is called a Type II error (False Acceptance Rate (FAR) or False Accept Rate (FAR)). Type II errors are the most dangerous and thus the most important to avoid.


The goal is to obtain low numbers for each type of error, but When comparing different biometric systems, many different variables are used, but one of the most important metrics is the crossover error rate (CER).

The accuracy of any biometric method is measured in terms of Failed Acceptance Rate (FAR) and Failed Rejection Rate (FRR). Both are expressed as percentages. The FAR is the rate at which attempts by unauthorized users are incorrectly accepted as valid. The FRR is just the opposite. It measures the rate at which authorized users are denied access.

The relationship between FRR (Type I) and FAR (Type II) is depicted in the graphic below. As one rate increases, the other decreases. The Cross-over Error Rate (CER) is sometimes considered a good indicator of the overall accuracy of a biometric system. This

is the point at which the FRR and the FAR have the same value. Solutions with a lower CER are typically more accurate.

See graphic below from Biometria showing this relationship. The Cross-over Error Rate (CER) is also called the Equal Error Rate (EER), the two are synonymous.

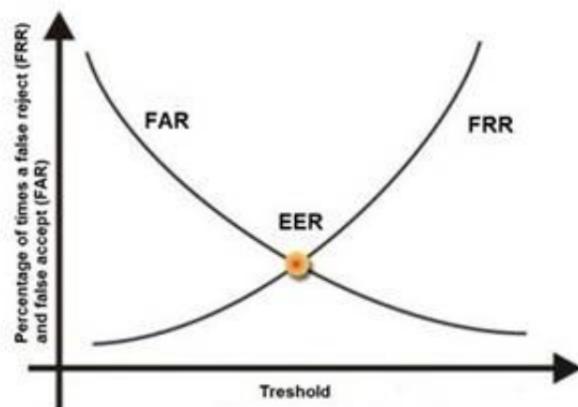

C:\Users\MCS\Desktop\1.jpg Cross Over Error Rate

The other answers are incorrect:

Type I error is also called as False Rejection Rate where a valid user is rejected by the system.

Type III error : there is no such error type in biometric system.

Crossover error rate stated in percentage, represents the point at which false rejection equals the false acceptance rate.

Reference(s) used for this question: <http://www.biometria.sk/en/principles-of-biometrics.html>

and

Shon Harris, CISSP All In One (AIO), 6th Edition, Chapter 3, Access Control, Page 188- 189

and

Tech Republic, Reduce Multi\_Factor Authentication Cost

### NEW QUESTION 197

- (Topic 1)

Which of the following is true of two-factor authentication?

- A. It uses the RSA public-key signature based on integers with large prime factors.
- B. It requires two measurements of hand geometry.
- C. It does not use single sign-on technology.
- D. It relies on two independent proofs of identity.

**Answer: D**

#### Explanation:

The Answer It relies on two independent proofs of identity. Two-factor authentication refers to using two independent proofs of identity, such as something the user has (e.g. a token card) and something the user knows (a password). Two-factor authentication may be used with single sign-on.

The following answers are incorrect: It requires two measurements of hand geometry. Measuring hand geometry twice does not yield two independent proofs.

It uses the RSA public-key signature based on integers with large prime factors. RSA encryption uses integers with exactly two prime factors, but the term "two-factor authentication" is not used in that context.

It does not use single sign-on technology. This is a detractor. The following reference(s) were/was used to create this question:

Shon Harris AIO v.3 p.129

ISC2 OIG, 2007 p. 126

### NEW QUESTION 198

- (Topic 1)

What does it mean to say that sensitivity labels are "incomparable"?

- A. The number of classification in the two labels is different.
- B. Neither label contains all the classifications of the other.
- C. the number of categories in the two labels are different.
- D. Neither label contains all the categories of the other.

**Answer:** D

#### Explanation:

If a category does not exist then you cannot compare it. Incomparable is when you have two disjointed sensitivity labels, that is a category in one of the labels is not in the other label. "Because neither label contains all the categories of the other, the labels can't be compared. They're said to be incomparable"

COMPARABILITY:

The label:

TOP SECRET [VENUS ALPHA]

is "higher" than either of the labels:

SECRET [VENUS ALPHA] TOP SECRET [VENUS]

But you can't really say that the label:

TOP SECRET [VENUS]

is higher than the label:

SECRET [ALPHA]

Because neither label contains all the categories of the other, the labels can't be compared. They're said to be incomparable. In a mandatory access control system, you won't be allowed access to a file whose label is incomparable to your clearance.

The Multilevel Security policy uses an ordering relationship between labels known as the dominance relationship. Intuitively, we think of a label that dominates another as being "higher" than the other. Similarly, we think of a label that is dominated by another as being "lower" than the other. The dominance relationship is used to determine permitted operations and information flows.

DOMINANCE

The dominance relationship is determined by the ordering of the Sensitivity/Clearance component of the label and the intersection of the set of Compartments.

Sample Sensitivity/Clearance ordering are:

Top Secret > Secret > Confidential > Unclassified s3 > s2 > s1 > s0

Formally, for label one to dominate label 2 both of the following must be true: The sensitivity/clearance of label one must be greater than or equal to the sensitivity/clearance of label two.

The intersection of the compartments of label one and label two must equal the compartments of label two.

Additionally:

Two labels are said to be equal if their sensitivity/clearance and set of compartments are exactly equal. Note that dominance includes equality.

One label is said to strictly dominate the other if it dominates the other but is not equal to the other.

Two labels are said to be incomparable if each label has at least one compartment that is not included in the other's set of compartments.

The dominance relationship will produce a partial ordering over all possible MLS labels, resulting in what is known as the MLS Security Lattice.

The following answers are incorrect:

The number of classification in the two labels is different. Is incorrect because the categories are what is being compared, not the classifications.

Neither label contains all the classifications of the other. Is incorrect because the categories are what is being compared, not the classifications.

the number of categories in the two labels is different. Is incorrect because it is possible a category exists more than once in one sensitivity label and does exist in the other so they would be comparable.

Reference(s) used for this question:

OReilly - Computer Systems and Access Control (Chapter 3) <http://www.oreilly.com/catalog/csb/chapter/ch03.html>

and [http://rubix.com/cms/mls\\_dom](http://rubix.com/cms/mls_dom)

### NEW QUESTION 199

- (Topic 1)

Which of the following exemplifies proper separation of duties?

- A. Operators are not permitted modify the system time.
- B. Programmers are permitted to use the system console.
- C. Console operators are permitted to mount tapes and disks.
- D. Tape operators are permitted to use the system console.

**Answer:** A

#### Explanation:

This is an example of Separation of Duties because operators are prevented from modifying the system time which could lead to fraud. Tasks of this nature should be performed by they system administrators.

AIO defines Separation of Duties as a security principle that splits up a critical task among two or more individuals to ensure that one person cannot complete a risky task by himself.

The following answers are incorrect:

Programmers are permitted to use the system console. Is incorrect because programmers should not be permitted to use the system console, this task should be performed by operators. Allowing programmers access to the system console could allow fraud to occur so this is not an example of Separation of Duties..

Console operators are permitted to mount tapes and disks. Is incorrect because operators should be able to mount tapes and disks so this is not an example of Separation of Duties.

Tape operators are permitted to use the system console. Is incorrect because operators should be able to use the system console so this is not an example of Separation of Duties.

References:

OIG CBK Access Control (page 98 - 101) AIOv3 Access Control (page 182)

### NEW QUESTION 203

- (Topic 1)

Sensitivity labels are an example of what application control type?

- A. Preventive security controls
- B. Detective security controls

- C. Compensating administrative controls
- D. Preventive accuracy controls

**Answer:** A

**Explanation:**

Sensitivity labels are a preventive security application controls, such as are firewalls, reference monitors, traffic padding, encryption, data classification, one-time passwords, contingency planning, separation of development, application and test environments.

The incorrect answers are:

Detective security controls - Intrusion detection systems (IDS), monitoring activities, and audit trails.

Compensating administrative controls - There no such application control. Preventive accuracy controls - data checks, forms, custom screens, validity checks, contingency planning, and backups. Sources:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 7:

Applications and Systems Development (page 264).

KRUTZ, Ronald & VINES, Russel, The CISSP Prep Guide: Gold Edition, Wiley Publishing Inc., 2003, Chapter 7: Application Controls, Figure 7.1 (page 360).

**NEW QUESTION 204**

- (Topic 1)

What is called the percentage of valid subjects that are falsely rejected by a Biometric Authentication system?

- A. False Rejection Rate (FRR) or Type I Error
- B. False Acceptance Rate (FAR) or Type II Error
- C. Crossover Error Rate (CER)
- D. True Rejection Rate (TRR) or Type III Error

**Answer:** A

**Explanation:**

The percentage of valid subjects that are falsely rejected is called the False Rejection Rate (FRR) or Type I Error.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 38.

**NEW QUESTION 206**

- (Topic 1)

Which of the following biometric devices offers the LOWEST CER?

- A. Keystroke dynamics
- B. Voice verification
- C. Iris scan
- D. Fingerprint

**Answer:** C

**Explanation:**

From most effective (lowest CER) to least effective (highest CER) are: Iris scan, fingerprint, voice verification, keystroke dynamics.

Reference : Shon Harris Aio v3 , Chapter-4 : Access Control , Page : 131

Also see: [http://www.sans.org/reading\\_room/whitepapers/authentication/biometric-selection-body-parts-online\\_139](http://www.sans.org/reading_room/whitepapers/authentication/biometric-selection-body-parts-online_139)

**NEW QUESTION 209**

- (Topic 1)

Which of the following division is defined in the TCSEC (Orange Book) as minimal protection?

- A. Division D
- B. Division C
- C. Division B
- D. Division A

**Answer:** A

**Explanation:**

The criteria are divided into four divisions: D, C, B, and A ordered in a hierarchical manner with the highest division (A) being reserved for systems providing the most comprehensive security.

Each division represents a major improvement in the overall confidence one can place in the system for the protection of sensitive information.

Within divisions C and B there are a number of subdivisions known as classes. The classes are also ordered in a hierarchical manner with systems representative of division C and lower classes of division B being characterized by the set of computer security mechanisms that they possess.

Assurance of correct and complete design and implementation for these systems is gained mostly through testing of the security- relevant portions of the system.

The security-relevant portions of a system are referred to throughout this document as the Trusted Computing Base (TCB).

Systems representative of higher classes in division B and division A derive their security attributes more from their design and implementation structure.

Increased assurance that the required features are operative, correct, and tamperproof under all circumstances is gained through progressively more rigorous analysis during the design process.

TCSEC provides a classification system that is divided into hierarchical divisions of assurance levels:

Division D - minimal security Division C - discretionary protection Division B - mandatory protection Division A - verified protection

Reference: page 358 AIO V.5 Shon Harris

also

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, page 197.

Also:

THE source for all TCSEC "level" questions: <http://csrc.nist.gov/publications/secpubs/rainbow/std001.txt>

**NEW QUESTION 213**

- (Topic 1)

A confidential number used as an authentication factor to verify a user's identity is called a:

- A. PIN
- B. User ID
- C. Password
- D. Challenge

**Answer:** A

**Explanation:**

PIN Stands for Personal Identification Number, as the name states it is a combination of numbers.

The following answers are incorrect:

User ID This is incorrect because a Userid is not required to be a number and a Userid is only used to establish identity not verify it.

Password. This is incorrect because a password is not required to be a number, it could be any combination of characters.

Challenge. This is incorrect because a challenge is not defined as a number, it could be anything.

**NEW QUESTION 214**

- (Topic 1)

In non-discretionary access control using Role Based Access Control (RBAC), a central authority determines what subjects can have access to certain objects based on the organizational security policy. The access controls may be based on:

- A. The societies role in the organization
- B. The individual's role in the organization
- C. The group-dynamics as they relate to the individual's role in the organization
- D. The group-dynamics as they relate to the master-slave role in the organization

**Answer:** B

**Explanation:**

In Non-Discretionary Access Control, when Role Based Access Control is being used, a central authority determines what subjects can have access to certain objects based on the organizational security policy. The access controls may be based on the individual's role in the organization.

Reference(S) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 33.

**NEW QUESTION 215**

- (Topic 1)

The throughput rate is the rate at which individuals, once enrolled, can be processed and identified or authenticated by a biometric system. Acceptable throughput rates are in the range of:

- A. 100 subjects per minute.
- B. 25 subjects per minute.
- C. 10 subjects per minute.
- D. 50 subjects per minute.

**Answer:** C

**Explanation:**

The throughput rate is the rate at which individuals, once enrolled, can be processed and identified or authenticated by a biometric system.

Acceptable throughput rates are in the range of 10 subjects per minute.

Things that may impact the throughput rate for some types of biometric systems may include:

A concern with retina scanning systems may be the exchange of body fluids on the eyepiece.

Another concern would be the retinal pattern that could reveal changes in a person's health, such as diabetes or high blood pressure.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 38.

**NEW QUESTION 218**

- (Topic 1)

Which of the following is the LEAST user accepted biometric device?

- A. Fingerprint
- B. Iris scan
- C. Retina scan
- D. Voice verification

**Answer:** C

**Explanation:**

The biometric device that is least user accepted is the retina scan, where a system scans the blood-vessel pattern on the backside of the eyeball. When using this device, an individual has to place their eye up to a device, and may require a puff of air to be blown into the eye. The iris scan only needs for an individual to glance at a camera that could be placed above a door.

Source: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw- Hill/Osborne, 2002, Chapter 4: Access Control (page 131).

**NEW QUESTION 222**

- (Topic 1)

Controls provide accountability for individuals who are accessing sensitive information. This accountability is accomplished:

- A. through access control mechanisms that require identification and authentication and through the audit function.
- B. through logical or technical controls involving the restriction of access to systems and the protection of information.
- C. through logical or technical controls but not involving the restriction of access to systems and the protection of information.
- D. through access control mechanisms that do not require identification and authentication and do not operate through the audit function.

**Answer:** A

**Explanation:**

Controls provide accountability for individuals who are accessing sensitive information. This accountability is accomplished through access control mechanisms that require identification and authentication and through the audit function. These controls must be in accordance with and accurately represent the organization's security policy. Assurance procedures ensure that the control mechanisms correctly implement the security policy for the entire life cycle of an information system. Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 33.

**NEW QUESTION 223**

- (Topic 1)

Examples of types of physical access controls include all EXCEPT which of the following?

- A. badges
- B. locks
- C. guards
- D. passwords

**Answer:** D

**Explanation:**

Passwords are considered a Preventive/Technical (logical) control. The following answers are incorrect:

badges Badges are a physical control used to identify an individual. A badge can include a smart device which can be used for authentication and thus a Technical control, but the actual badge itself is primarily a physical control.

locks Locks are a Preventative Physical control and has no Technical association. guards Guards are a Preventative Physical control and has no Technical association.

The following reference(s) were/was used to create this question:

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 35).

**NEW QUESTION 224**

.....

## THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual SSCP Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the SSCP Product From:

<https://www.2passeasy.com/dumps/SSCP/>

### Money Back Guarantee

#### **SSCP Practice Exam Features:**

- \* SSCP Questions and Answers Updated Frequently
- \* SSCP Practice Questions Verified by Expert Senior Certified Staff
- \* SSCP Most Realistic Questions that Guarantee you a Pass on Your First Try
- \* SSCP Practice Test Questions in Multiple Choice Formats and Updates for 1 Year