


az-500 Dumps

Microsoft Azure Security Technologies

<https://www.certleader.com/az-500-dumps.html>

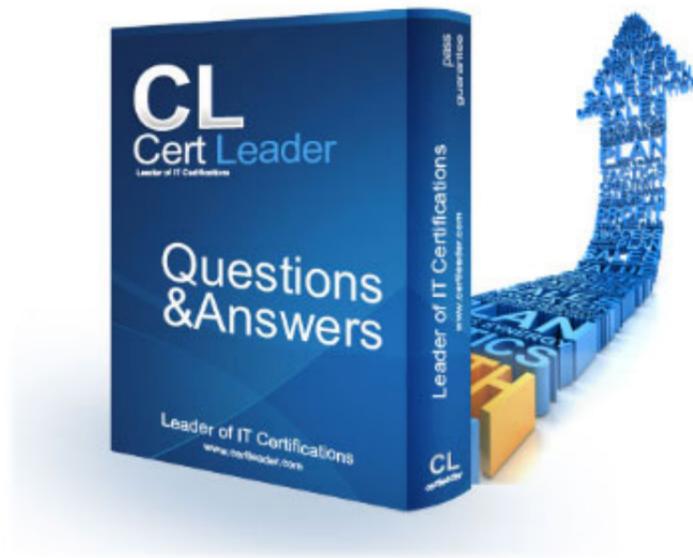

NEW QUESTION 1

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have a hybrid configuration of Azure Active Directory (AzureAD). You have an Azure HDInsight cluster on a virtual network.

You plan to allow users to authenticate to the cluster by using their on-premises Active Directory credentials. You need to configure the environment to support the planned authentication.

Solution: You create a site-to-site VPN between the virtual network and the on-premises network. Does this meet the goal?

- A. Yes
- B. No

Answer: A

Explanation:

You can connect HDInsight to your on-premises network by using Azure Virtual Networks and a VPN gateway.

- Note: To allow HDInsight and resources in the joined network to communicate by name, you must perform the following actions: Create Azure Virtual Network.
- Create a custom DNS server in the Azure Virtual Network.
- Configure the virtual network to use the custom DNS server instead of the default Azure Recursive Resolver. Configure forwarding between the custom DNS server and your on-premises DNS server.

References:

<https://docs.microsoft.com/en-us/azure/hdinsight/connect-on-premises-network>

NEW QUESTION 2

DRAG DROP

You are implementing conditional access policies.

You must evaluate the existing Azure Active Directory (Azure AD) risk events and risk levels to configure and implement the policies. You need to identify the risk level of the following risk events:

- Users with leaked credentials Impossible travel to atypical locations
- Sign ins from IP addresses with suspicious activity

Which level should you identify for each risk event? To answer, drag the appropriate levels to the correct risk events. Each level may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Select and Place:

Levels	Answer Area
High	Impossible travel to atypical locations: <input type="text"/>
Low	Users with leaked credentials: <input type="text"/>
Medium	Sign ins from IP addresses with suspicious activity: <input type="text"/>

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

- Azure AD Identity protection can detect six types of suspicious sign-in activities: Users with leaked credentials
 - Sign-ins from anonymous IP addresses Impossible travel to atypical locations
 - Sign-ins from infected devices
 - Sign-ins from IP addresses with suspicious activity Sign-ins from unfamiliar locations
- These six types of events are categorized in to 3 levels of risks – High, Medium & Low:

Sign-in Activity	Risk Level
Users with leaked credentials	High
Sign-ins from anonymous IP addresses	Medium
Impossible travel to atypical locations	Medium
Sign-ins from infected devices	Medium
Sign-ins from IP addresses with suspicious activity	Low
Sign-ins from unfamiliar locations	Medium

References:

<http://www.rebeladmin.com/2018/09/step-step-guide-configure-risk-based-azure-conditional-access-policies/>

NEW QUESTION 3

You have an Azure subscription.

You create an Azure web app named Contoso1812 that uses an S1 App service plan.

You create a DNS record for www.contoso.com that points to the IP address of Contoso1812.

You need to ensure that users can access Contoso1812 by using the https://www.contoso.com URL. Which two actions should you perform? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. Turn on the system-assigned managed identity for Contoso1812.
- B. Add a hostname to Contoso1812.
- C. Scale out the App Service plan of Contoso1812.
- D. Add a deployment slot to Contoso1812.
- E. Scale up the App Service plan of Contoso1812.

Answer: BE

Explanation:

B: You can configure Azure DNS to host a custom domain for your web apps. For example, you can create an Azure web app and have your users access it using either www.contoso.com or contoso.com as a fully qualified domain name (FQDN).

To do this, you have to create three records:

A root "A" record pointing to contoso.com A root "TXT" record for verification

A "CNAME" record for the www name that points to the A record

E: To map a custom DNS name to a web app, the web app's App Service plan must be a paid tier (Shared, Basic, Standard, Premium or Consumption for Azure Functions). I

Scale up the App Service plan: Select any of the non-free tiers (D1, B1, B2, B3, or any tier in the Production category). References:

<https://docs.microsoft.com/en-us/azure/dns/dns-web-sites-custom-domain>

Testlet 1

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other question on this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next sections of the exam. After you begin a new section, you cannot return to this section.

To start the case study

To display the first question on this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview

Litware, Inc. is a digital media company that has 500 employees in the Chicago area and 20 employees in the San Francisco area.

Existing Environment

Litware has an Azure subscription named Sub1 that has a subscription ID of 43894a43-17c2-4a39-8cfc-3540c2653ef4.

Sub1 is associated to an Azure Active Directory (Azure AD) tenant named litwareinc.com. The tenant contains the user objects and the device objects of all the Litware employees and their devices. Each user is assigned an Azure AD Premium P2 license. Azure AD Privileged Identity Management (PIM) is activated.

The tenant contains the groups shown in the following table.

Name	Type	Description
Group1	Security group	A group that has the Dynamic User membership type, contains all the San Francisco users, and provides access to many Azure AD applications and Azure resources.
Group2	Security group	A group that has the Dynamic User membership type and contains the Chicago IT team

The Azure subscription contains the objects shown in the following table.

Name	Type	Description
VNet1	Virtual network	VNet1 is a virtual network that contains security-sensitive IT resources. VNet1 contains three subnets named Subnet0, Subnet1, and AzureFirewallSubnet.
VM0	Virtual machine	VM0 is an Azure virtual machine that runs Windows Server 2016, connects to Subnet0, and has just in time (JIT) VM access configured.
VM1	Virtual machine	VM1 is an Azure virtual machine that runs Windows Server 2016 and connects to Subnet0.
SQLDB1	Azure SQL Database	SQLDB1 is an Azure SQL database on a SQL Database server named LitwareSQLServer1.
WebApp1	Web app	WebApp1 is an Azure web app that is accessible by using https://litwareinc.com and http://www.litwareinc.com .
Resource Group1	Resource group	Resource Group1 is a resource group that contains VNet1, VM0, and VM1.
Resource Group2	Resource group	Resource Group2 is a resource group that contains shared IT resources.

Azure Security Center is set to the Free tier.

Planned changes

Litware plans to deploy the Azure resources shown in the following table.

Name	Type	Description
Firewall1	Azure Firewall	An Azure firewall on VNet1.
RT1	Route table	A route table that will contain a route pointing to Firewall1 as the default gateway and will be assigned to Subnet0.
AKS1	Azure Kubernetes Service (AKS)	A managed AKS cluster

Litware identifies the following identity and access requirements:

- All San Francisco users and their devices must be members of Group1.
- The members of Group2 must be assigned the Contributor role to Resource Group2 by using a permanent eligible assignment.
- Users must be prevented from registering applications in Azure AD and from consenting to applications that access company information on the users' behalf.

Platform Protection Requirements

Litware identifies the following platform protection requirements:

- Microsoft Antimalware must be installed on the virtual machines in Resource Group1.
- The members of Group2 must be assigned the Azure Kubernetes Service Cluster Admin Role. Azure AD users must be able to authenticate to AKS1 by using their Azure AD credentials.
- Following the implementation of the planned changes, the IT team must be able to connect to VM0 by using JIT VM access.
- A new custom RBAC role named Role1 must be used to delegate the administration of the managed disks in Resource Group1. Role1 must be available only for Resource Group1.

Security Operations Requirements

Litware must be able to customize the operating system security configurations in Azure Security Center.

NEW QUESTION 4

You need to ensure that users can access VM0. The solution must meet the platform protection requirements.

What should you do?

- Move VM0 to Subnet1.
- On Firewall, configure a network traffic filtering rule.
- Assign RT1 to AzureFirewallSubnet.
- On Firewall, configure a DNAT rule.

Answer: A

Explanation:

Azure Firewall has the following known issue:

Conflict with Azure Security Center (ASC) Just-in-Time (JIT) feature.

If a virtual machine is accessed using JIT, and is in a subnet with a user-defined route that points to Azure Firewall as a default gateway, ASC JIT doesn't work. This is a result of asymmetric routing – a packet comes in via the virtual machine public IP (JIT opened the access), but the return path is via the firewall, which drops the packet because there is no established session on the firewall.

Solution: To work around this issue, place the JIT virtual machines on a separate subnet that doesn't have a user-defined route to the firewall. Scenario:

VM0	Virtual machine	VM0 is an Azure virtual machine that runs Windows Server 2016, connects to Subnet0, and has just in time (JIT) VM access configured.
-----	-----------------	--

Following the implementation of the planned changes, the IT team must be able to connect to VM0 by using JIT VM access.

Name	Type	Description
Firewall1	Azure Firewall	An Azure firewall on VNet1.
RT1	Route table	A route table that will contain a route pointing to Firewall1 as the default gateway and will be assigned to Subnet0.

References:

<https://docs.microsoft.com/en-us/azure/firewall/overview>

Testlet 2

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other question on this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next sections of the exam. After you begin a new section, you cannot return to this section.

To start the case study

To display the first question on this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview

Contoso, Ltd. is a consulting company that has a main office in Montreal and two branch offices in Seattle and New York. The company hosts its entire server infrastructure in Azure.

Contoso has two Azure subscriptions named Sub1 and Sub2. Both subscriptions are associated to an Azure Active Directory (Azure AD) tenant named contoso.com.

Technical requirements

Contoso identifies the following technical requirements:

- Deploy Azure Firewall to VNetWork1 in Sub2. Register an application named App2 in contoso.com.
- Whenever possible, use the principle of least privilege.
- Enable Azure AD Privileged Identity Management (PIM) for contoso.com

Existing Environment Azure AD

Contoso.com contains the users shown in the following table.

Name	City	Role
User1	Montreal	Global administrator
User2	MONTREAL	Security administrator
User3	London	Privileged role administrator
User4	Ontario	Application administrator
User5	Seattle	Cloud application administrator
User6	Seattle	User administrator
User7	Sydney	Reports reader
User8	Sydney	None

Contoso.com contains the security groups shown in the following table.

Name	Membership type	Dynamic membership rule
Group1	Dynamic user	user.city -contains "ON"
Group2	Dynamic user	user.city -match "*on"

Sub1

Sub1 contains six resource groups named RG1, RG2, RG3, RG4, RG5, and RG6. User2 creates the virtual networks shown in the following table.

Name	Resource group
VNET1	RG1
VNET2	RG2
VNET3	RG3
VNET4	RG4

Sub1 contains the locks shown in the following table.

Name	Set on	Lock type
Lock1	RG1	Delete
Lock2	RG2	Read-only
Lock3	RG3	Delete
Lock4	RG3	Read-only

Sub1 contains the Azure policies shown in the following table.

Policy definition	Resource type	Scope
Allowed resource types	networkSecurityGroups	RG4
Not allowed resource types	virtualNetworks/subnets	RG5
Not allowed resource types	networksSecurityGroups	RG5
Not allowed resource types	virtualNetworks/virtualNetworkPeerings	RG6

Sub2

Sub2 contains the network security groups (NSGs) shown in the following table.

Name	Associated to
NSG1	NIC2
NSG2	Subnet1.1
NSG3	Subnet1.3
NSG4	Subnet2.1

NSG1 has the inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
65000	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Any	Any	AzureLoadBalancer	Any	Allow
65500	Any	Any	Any	Any	Deny

NSG2 has the inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
100	80	TCP	Internet	VirtualNetwork	Allow
65000	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Any	Any	AzureLoadBalancer	Any	Allow
65500	Any	Any	Any	Any	Deny

NSG3 has the inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
100	Any	TCP	ASG1	ASG1	Allow
150	Any	Any	ASG2	VirtualNetwork	Allow
200	Any	Any	Any	Any	Deny
65000	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Any	Any	AzureLoadBalancer	Any	Allow
65500	Any	Any	Any	Any	Deny

NSG4 has the inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
100	Any	Any	Any	Any	Allow
65000	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Any	Any	AzureLoadBalancer	Any	Allow
65500	Any	Any	Any	Any	Deny

NSG1, NSG2, NSG3, and NSG4 have the outbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
65000	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Any	Any	Any	Internet	Allow
65500	Any	Any	Any	Any	Deny

Contoso identifies the following technical requirements:

- Deploy Azure Firewall to VNetwork1 in Sub2. Register an application named App2 in contoso.com.
- Whenever possible, use the principle of least privilege.
- Enable Azure AD Privileged Identity Management (PIM) for contoso.com.

NEW QUESTION 5
HOTSPOT

You are evaluating the security of the network communication between the virtual machines in Sub2. For each of the following statements, select Yes if the statement is true. Otherwise, select No. NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements

Yes

No

From VM1, you can successfully ping the public IP address of VM2. Yes No

From VM1, you can successfully ping the private IP address of VM3. Yes No

From VM1, you can successfully ping the public IP address of VM5. Yes No

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: Yes

NSG1 has the inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
65000	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Any	Any	AzureLoadBalancer	Any	Allow
65500	Any	Any	Any	Any	Deny

NSG2 has the inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
100	80	TCP	Internet	VirtualNetwork	Allow
65000	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Any	Any	AzureLoadBalancer	Any	Allow
65500	Any	Any	Any	Any	Deny

Box 2: Yes

Box 3: No Note:

Sub2 contains the virtual machines shown in the following table.

Name	Network interface	Application security group	Connected to
VM1	NIC1	ASG1	Subnet1.1
VM2	NIC2	ASG2	Subnet1.1
VM3	NIC3	None	Subnet1.2
VM4	NIC4	ASG1	Subnet1.3
VM5	NIC5	None	Subnet2.1

Name	Subnet
VNetwork1	Subnet1.1, Subnet1.2 and Subnet1.3
VNetwork2	Subnet2.1

Sub2 contains the network security groups (NSGs) shown in the following table.

Name	Associated to
NSG1	NIC2
NSG2	Subnet1.1
NSG3	Subnet1.3
NSG4	Subnet2.1

Question Set 3

NEW QUESTION 6

HOTSPOT

You have an Azure subscription. The subscription contains Azure virtual machines that run Windows Server 2016.

You need to implement a policy to ensure that each virtual machine has a custom antimalware virtual machine extension installed. How should you complete the policy? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```

{
  "if": {
    "allOf": [
      {
        "field": "type",
        "equals": "Microsoft.Compute/virtualMachines"
      },
      {
        "field": "Microsoft.Compute/imagesSKU",
        "equals": "2016-Datacenter",
      }
    ]
  },
  "then": {
    "effect": "
    [
      Append
      Deny
      DeployIfNotExists
    ]"
  },
  "details": {
    "type": "Microsoft.GuestConfiguration/guestConfigurationAssignments",
    "roleDefinitionsIds": [
      "/providers/microsoft.authorization/roleDefinitions/12345678-1234-5678-abcd-012345678910"
    ],
    "name": "customExtension",
    "deployment": {
      "properties": {
        "mode": "incremental",
        "parameters": {
          "
          [
            existenceCondition
            resources
            template
          ]"
        }
      }
    }
  }
}

```

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: DeployIfNotExists

DeployIfNotExists executes a template deployment when the condition is met.

Box 2: Template

The details property of the DeployIfNotExists effects has all the subproperties that define the related resources to match and the template deployment to execute.

Deployment [required]

This property should include the full template deployment as it would be passed to the Microsoft.Resources/deployment References:

<https://docs.microsoft.com/en-us/azure/governance/policy/concepts/effects>

NEW QUESTION 7

You are configuring an Azure Kubernetes Service (AKS) cluster that will connect to an Azure Container Registry.

You need to use the auto-generated service principal to authenticate to the Azure Container Registry. What should you create?

- A. an Azure Active Directory (Azure AD) group
- B. an Azure Active Directory (Azure AD) role assignment
- C. an Azure Active Directory (Azure AD) user
- D. a secret in Azure Key Vault

Answer: B

Explanation:

When you create an AKS cluster, Azure also creates a service principal to support cluster operability with other Azure resources. You can use this auto-generated service principal for authentication with an ACR registry. To do so, you need to create an Azure AD role assignment that grants the cluster's service principal access to the container registry.

References:

<https://docs.microsoft.com/bs-latn-ba/azure/container-registry/container-registry-auth-aks>

NEW QUESTION 8

HOTSPOT

You have an Azure subscription that contains the virtual machines shown in the following table.

Name	Resource group	Status
VM1	RG1	Stopped (Deallocated)
VM2	RG2	Stopped (Deallocated)

You create the Azure policies shown in the following table.

Policy definition	Resource type	Scope
Not allowed resource types	virtualMachines	RG1
Allowed resource types	virtualMachines	RG2

You create the resource locks shown in the following table.

Name	Type	Created on
Lock1	Read-only	VM1
Lock2	Read-only	RG2

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
You can start VM1.	<input type="radio"/>	<input type="radio"/>
You can start VM2.	<input type="radio"/>	<input type="radio"/>
You can create a virtual machine in RG2.	<input type="radio"/>	<input type="radio"/>

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Answer Area

Statements	Yes	No
You can start VM1.	<input type="radio"/>	<input checked="" type="radio"/>
You can start VM2.	<input checked="" type="radio"/>	<input type="radio"/>
You can create a virtual machine in RG2.	<input checked="" type="radio"/>	<input type="radio"/>

References:

<https://docs.microsoft.com/en-us/azure/governance/blueprints/concepts/resource-locking>

NEW QUESTION 9

HOTSPOT

You have an Azure key vault.

You need to delegate administrative access to the key vault to meet the following requirements:

_ Provide a user named User1 with the ability to set advanced access policies for the key vault. Provide a user named User2 with the ability to add and delete certificates in the key vault. Use the principle of least privilege.

What should you use to assign access to each user? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

User1: ▼

A key vault access policy
Azure Information Protection
Azure Policy
Managed identities for Azure resources
RBAC

User2: ▼

A key vault access policy
Azure Information Protection
Azure Policy
Managed identities for Azure resources
RBAC

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

User1: RBAC

- _ RBAC is used as the Key Vault access control mechanism for the management plane. It would allow a user with the proper identity to: set Key Vault access policies
- _ create, read, update, and delete key vaults set Key Vault tags

Note: Role-based access control (RBAC) is a system that provides fine-grained access management of Azure resources. Using RBAC, you can segregate duties within your team and grant only the amount of access to users that they need to perform their jobs.

User2: A key vault access policy

A key vault access policy is the access control mechanism to get access to the key vault data plane. Key Vault access policies grant permissions separately to keys, secrets, and certificates.

References:

<https://docs.microsoft.com/en-us/azure/key-vault/key-vault-secure-your-key-vault>

NEW QUESTION 10

HOTSPOT

You have two Azure virtual machines in the East US2 region as shown in the following table.

Name	Operating system	Type	Tier
VM1	Windows Server 2008 R2	A3	Basic
VM2	Ubuntu 16.04-DAILY-LTS	L4s	Standard

You deploy and configure an Azure Key vault.

You need to ensure that you can enable Azure Disk Encryption on VM1 and VM2.

What should you modify on each virtual machine? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

VM1:

	▼
The operating system version	
The tier	
The type	

VM2:

	▼
The operating system version	
The tier	
The type	

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

VM1: The Tier

The Tier needs to be upgraded to standard.

Disk Encryption for Windows and Linux IaaS VMs is in General Availability in all Azure public regions and Azure Government regions for Standard VMs and VMs with Azure Premium Storage.

VM2: The type

Need to change the VMtype to any of A, D, DS, G, GS, F, and so on, series IaaS VMs.

Not the operating system version: Ubuntu 16.04 is supported. References:

<https://docs.microsoft.com/en-us/azure/security/azure-security-disk-encryption-overview>

https://docs.microsoft.com/en-us/azure/security/azure-security-disk-encryption-faq#bkmk_LinuxOSSupport

NEW QUESTION 10

HOTSPOT

You assign User8 the Owner role for RG4, RG5, and RG6.

In which resource groups can User8 create virtual networks and NSGs? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

User8 can create virtual networks in:

	▼
RG4 only	
RG6 only	
RG4 and RG6 only	
RG4, RG5, and RG6	

User8 can create NSGs in:

	▼
RG4 only	
RG4 and RG5 only	
RG4 and RG6 only	
RG4, RG5, and RG6	

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: RG4 only

Virtual Networks are not allowed for Rg5 and Rg6.

Box 2: Rg4,Rg5, and Rg6 Scenario:

Contoso has two Azure subscriptions named Sub1 and Sub2.

Sub1 contains six resource groups named RG1, RG2, RG3, RG4, RG5, and RG6. You assign User8 the Owner role for RG4, RG5, and RG6

User8 city Sidney, Role:None

Note: A network security group (NSG) contains a list of security rules that allow or deny network traffic to resources connected to Azure Virtual Networks (VNet). NSGs can be associated to subnets, individual VMs (classic), or individual network interfaces (NIC) attached to VMs (Resource Manager).

References:

<https://docs.microsoft.com/en-us/azure/governance/policy/overview>

NEW QUESTION 15

HOTSPOT

Which virtual networks in Sub1 can User2 modify and delete in their current state? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Virtual networks that User2 can modify:

▼
VNET4 only
VNET4 and VNET1 only
VNET4, VNET3, and VNET1 only
VNET4, VNET3, VNET2, and VNET1

Virtual networks that User2 can delete:

▼
VNET4 only
VNET4 and VNET1 only
VNET4, VNET3, and VNET1 only
VNET4, VNET3, VNET2, and VNET1

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: VNET4 and VNET1 only

RG1 has only Delete lock, while there are no locks on RG4. RG2 and RG3 both have Read-only locks.

Box 2: VNET4 only

There are no locks on RG4, while the other resource groups have either Delete or Read-only locks.

Note: As an administrator, you may need to lock a subscription, resource group, or resource to prevent other users in your organization from accidentally deleting or modifying critical resources. You can set the lock level to CanNotDelete or ReadOnly. In the portal, the locks are called Delete and Read-only respectively.

_ CanNotDelete means authorized users can still read and modify a resource, but they can't delete the resource.

_ ReadOnly means authorized users can read a resource, but they can't delete or update the resource. Applying this lock is similar to restricting all authorized users to the permissions granted by the Reader role.

Scenario:

User2 is a Security administrator.

Sub1 contains six resource groups named RG1, RG2, RG3, RG4, RG5, and RG6.

User2 creates the virtual networks shown in the following table.

Name	Resource group
VNET1	RG1
VNET2	RG2
VNET3	RG3
VNET4	RG4

Sub1 contains the locks shown in the following table.

Name	Set on	Lock type
Lock1	RG1	Delete
Lock2	RG2	Read-only
Lock3	RG3	Delete
Lock4	RG3	Read-only

References:

<https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-group-lock-resources>

Testlet 2

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other question on this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next sections of the exam. After you begin a new section, you cannot return to this section.

To start the case study

To display the first question on this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview

Litware, Inc. is a digital media company that has 500 employees in the Chicago area and 20 employees in the San Francisco area.

Existing Environment

Litware has an Azure subscription named Sub1 that has a subscription ID of 43894a43-17c2-4a39-8cfc-3540c2653ef4.

Sub1 is associated to an Azure Active Directory (Azure AD) tenant named litwareinc.com. The tenant contains the user objects and the device objects of all the Litware employees and their devices. Each user is assigned an Azure AD Premium P2 license. Azure AD Privileged Identity Management (PIM) is activated.

The tenant contains the groups shown in the following table.

Name	Type	Description
Group1	Security group	A group that has the Dynamic User membership type, contains all the San Francisco users, and provides access to many Azure AD applications and Azure resources.
Group2	Security group	A group that has the Dynamic User membership type and contains the Chicago IT team

The Azure subscription contains the objects shown in the following table.

Name	Type	Description
VNet1	Virtual network	VNet1 is a virtual network that contains security-sensitive IT resources. VNet1 contains three subnets named Subnet0, Subnet1, and AzureFirewallSubnet.
VM0	Virtual machine	VM0 is an Azure virtual machine that runs Windows Server 2016, connects to Subnet0, and has just in time (JIT) VM access configured.
VM1	Virtual machine	VM1 is an Azure virtual machine that runs Windows Server 2016 and connects to Subnet0.
SQLDB1	Azure SQL Database	SQLDB1 is an Azure SQL database on a SQL Database server named LitwareSQLServer1.
WebApp1	Web app	WebApp1 is an Azure web app that is accessible by using https://litwareinc.com and http://www.litwareinc.com .
Resource Group1	Resource group	Resource Group1 is a resource group that contains VNet1, VM0, and VM1.
Resource Group2	Resource group	Resource Group2 is a resource group that contains shared IT resources.

Azure Security Center is set to the Free tier.

Planned changes

Litware plans to deploy the Azure resources shown in the following table.

Name	Type	Description
Firewall1	Azure Firewall	An Azure firewall on VNet1.
RT1	Route table	A route table that will contain a route pointing to Firewall1 as the default gateway and will be assigned to Subnet0.
AKS1	Azure Kubernetes Service (AKS)	A managed AKS cluster

Litware identifies the following identity and access requirements:

- All San Francisco users and their devices must be members of Group1.
- The members of Group2 must be assigned the Contributor role to Resource Group2 by using a permanent eligible assignment.
- Users must be prevented from registering applications in Azure AD and from consenting to applications that access company information on the users' behalf.

Platform Protection Requirements

Litware identifies the following platform protection requirements:

- Microsoft Antimalware must be installed on the virtual machines in Resource Group1.
- The members of Group2 must be assigned the Azure Kubernetes Service Cluster Admin Role. Azure AD users must be able to authenticate to AKS1 by using their Azure AD credentials.
- Following the implementation of the planned changes, the IT team must be able to connect to VM0 by using JIT VM access.
- A new custom RBAC role named Role1 must be used to delegate the administration of the managed disks in Resource Group1. Role1 must be available only for Resource Group1.

Security Operations Requirements

Litware must be able to customize the operating system security configurations in Azure Security Center.

NEW QUESTION 16

HOTSPOT

You plan to use Azure Log Analytics to collect logs from 200 servers that run Windows Server 2016.

You need to automate the deployment of the Microsoft Monitoring Agent to all the servers by using an Azure Resource Manager template. How should you complete the template? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```
{
  "type": "Microsoft.Compute/virtualMachines/extensions",
  "name": "[concat(parameter('vmname'), /OMSExtension)]",
  "apiVersion": "[variables('apiVersion')]",
  "location": "[resourceGroup().location]",
  "dependsOn": [
    "[concat('Microsoft.Compute/virtualMachines/', parameters('vmName'))]"
  ],
  "properties": {
    "publisher": "Microsoft.EnterpriseCloud.Monitoring",
    "type": "MicrosoftMonitoringAgent",
    "typeHandlerVersion": "1.0",
    "autoUpgradeMinorVersion": true,
    "settings": {
      "[variable('var1')]"
      "AzureADApplicationID"
      "WorkspaceID"
      "WorkspaceName"
      "WorkspaceURL"
    },
    "protectedSettings": {
      "[variable('var2')]"
      "AzureADApplicationSecret"
      "StorageAccountKey"
      "WorkspaceID"
      "WorkspaceKey"
    }
  }
}
```

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Answer Area

```
{
  "type": "Microsoft.Compute/virtualMachines/extensions",
  "name": "[concat(parameter('vmname'), /OMSExtension)]",
  "apiVersion": "[variables('apiVersion')]",
  "location": "[resourceGroup().location]",
  "dependsOn": [
    "[concat('Microsoft.Compute/virtualMachines/', parameters('vmName'))]"
  ],
  "properties": {
    "publisher": "Microsoft.EnterpriseCloud.Monitoring",
    "type": "MicrosoftMonitoringAgent",
    "typeHandlerVersion": "1.0",
    "autoUpgradeMinorVersion": true,
    "settings": {
      "[variable('var1')]"
      "AzureADApplicationID"
      "WorkspaceID"
      "WorkspaceName"
      "WorkspaceURL"
    },
    "protectedSettings": {
      "[variable('var2')]"
      "AzureADApplicationSecret"
      "StorageAccountKey"
      "WorkspaceID"
      "WorkspaceKey"
    }
  }
}
```

References:

<https://blogs.technet.microsoft.com/manageabilityguys/2015/11/19/enabling-the-microsoft-monitoring-agent-in-windows-json-templates/>

NEW QUESTION 20

You have an Azure subscription named Sub1 that is associated to an Azure Active Directory (Azure AD) tenant named contoso.com.

You are assigned the Global administrator role for the tenant. You are responsible for managing Azure Security Center settings. You need to create a custom sensitivity label.

What should you do first?

- A. Create a custom sensitive information type.

- B. Elevate access for global administrators in Azure AD.
- C. Upgrade the pricing tier of the Security Center to Standard.
- D. Enable integration with Microsoft Cloud App Security.

Answer: A

Explanation:

First, you need to create a new sensitive information type because you can't directly modify the default rules.
References:
<https://docs.microsoft.com/en-us/office365/securitycompliance/customize-a-built-in-sensitive-information-type>

NEW QUESTION 21

HOTSPOT

You suspect that users are attempting to sign in to resources to which they have no access. You need to create an Azure Log Analytics query to identify failed user sign-in attempts from the last three days. The results must only show users who had more than five failed sign-in attempts. How should you configure the query? To answer, select the appropriate options in the answer area. NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```
let timeframe = 3d;
SecurityEvent
| where TimeGenerated > ago(3d)
| where AccountType == 'User' and  ==4625
| Summarize failed_login_attempts=
latest_failed_login=arg_max(TimeGenerated by Account
| where failed_login_attempts > 5
```

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

The following example identifies user accounts that failed to log in more than five times in the last day, and when they last attempted to log in. let timeframe = 1d;
SecurityEvent
| where TimeGenerated > ago(1d)
| where AccountType == 'User' and EventID == 4625 // 4625 - failed log in
| summarize failed_login_attempts=count(), latest_failed_login=arg_max(TimeGenerated, Account) by Account
| where failed_login_attempts > 5
| project-away Account1
References:
<https://docs.microsoft.com/en-us/azure/azure-monitor/log-query/examples>

NEW QUESTION 25

You need to configure WebApp1 to meet the data and application requirements. Which two actions should you perform? Each correct answer presents part of the solution. NOTE: Each correct selection is worth one point.

- A. Upload a public certificate.
- B. Turn on the HTTPS Only protocol setting.
- C. Set the Minimum TLS Version protocol setting to 1.2.
- D. Change the pricing tier of the App Service plan.
- E. Turn on the Incoming client certificates protocol setting.

Answer: AC

Explanation:

A: To configure Certificates for use in Azure Websites Applications you need to upload a public Certificate.
C: Over time, multiple versions of TLS have been released to mitigate different vulnerabilities. TLS 1.2 is the most current version available for apps running on Azure App Service.
Incorrect Answers:
B: We need support the http url as well.
Note:

WebApp1 is an Azure web app that is accessible by using <https://litwareinc.com> and <http://www.litwareinc.com>.

References:

<https://docs.microsoft.com/en-us/azure/app-service/app-service-web-configure-tls-mutual-auth>

<https://azure.microsoft.com/en-us/updates/app-service-and-functions-hosted-apps-can-now-update-tls-versions/>

NEW QUESTION 30

HOTSPOT

You need to create Role1 to meet the platform protection requirements.

How should you complete the role definition of Role1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```
(
  "Name" | "Role1",
  "Id" | "11111111-1111-1111-1111-111111111111",
  "IsCustom" : true,
  "Description": "VM storage operator"
  "Actions" : [
    

|                       |   |
|-----------------------|---|
|                       | ▼ |
| "Microsoft.Compute/   |   |
| "Microsoft.Resources/ |   |
| "Microsoft.Storage/   |   |



|                           |   |
|---------------------------|---|
|                           | ▼ |
| disks/*",                 |   |
| storageAccounts/*",       |   |
| virtualMachines/disks/*", |   |


  ],
  "NotActions": [
    ],
  "AssignableScopes" : [
    ]
  ]
}
```

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Scenario: A new custom RBAC role named Role1 must be used to delegate the administration of the managed disks in Resource Group1. Role1 must be available only for Resource Group1.

Azure RBAC template managed disks "Microsoft.Storage/" References:

<https://blogs.msdn.microsoft.com/azureedu/2017/02/11/new-managed-disk-storage-option-for-your-azure-vms/>

NEW QUESTION 31

DRAG DROP

You need to configure SQLDB1 to meet the data and application requirements.

Which three actions should you recommend be performed in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

Actions	Answer Area
From the Azure portal, create an Azure AD administrator for LitwareSQLServer1.	
In SQLDB1, create contained database users.	
Connect to SQLDB1 by using Microsoft SQL Server Management Studio (SSMS).	⬅️ ➡️
In Azure AD, create a system-assigned managed identity.	⬆️ ⬇️
In Azure AD, create a user-assigned managed identity.	

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Step 1: Connect to SQLDB1 by using Microsoft SQL Server Management Studio (SSMS)

Step 2: In SQLDB1, create contained database users.

Create a contained user in the database that represents the VM's system-assigned identity.

Step 3: In Azure AD, create a system-assigned managed identity.

A system-assigned identity for a Windows virtual machine (VM) can be used to access an Azure SQL server. Managed Service Identities are automatically managed by Azure and enable you to authenticate to services that support Azure AD authentication, without needing to insert credentials into your code.

References:

<https://docs.microsoft.com/en-us/azure/active-directory/managed-identities-azure-resources/tutorial-windows-vm-access-sql>

Question Set 2

NEW QUESTION 33

Your company has an Azure subscription named Sub1 that is associated to an Azure Active Directory (Azure AD) tenant named contoso.com.

The company develops an application named App1. App1 is registered in Azure AD.

You need to ensure that App1 can access secrets in Azure Key Vault on behalf of the application users. What should you configure?

- A. an application permission without admin consent
- B. a delegated permission without admin consent
- C. a delegated permission that requires admin consent
- D. an application permission that requires admin consent

Answer: B

Explanation:

Delegated permissions - Your client application needs to access the web API as the signed-in user, but with access limited by the selected permission. This type of permission can be granted by a user unless the permission requires administrator consent.

Incorrect Answers:

A, D: Application permissions - Your client application needs to access the web API directly as itself (no user context). This type of permission requires administrator consent and is also not available for public (desktop and mobile) client applications.

References:

<https://docs.microsoft.com/en-us/azure/active-directory/develop/quickstart-configure-app-access-web-apis>

NEW QUESTION 36

DRAG DROP

Your company has an Azure Active Directory (Azure AD) tenant named contoso.com.

The company is developing an application named App1. App1 will run as a service on server that runs Windows Server 2016. App1 will authenticate to contoso.com and access Microsoft Graph to read directory data.

You need to delegate the minimum required permissions to App1.

Which three actions should you perform in sequence from the Azure portal? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

Actions

Answer Area

- Grant permissions
- Add a delegated permission.
- Configure Azure AD Application Proxy.
- Add an application permission.
- Create an app registration.



- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Step 1: Create an app registration
First the application must be created/registered.
Step 2: Add an application permission
Application permissions are used by apps that run without a signed-in user present.
Step 3: Grant permissions
Incorrect Answers: Delegated permission
Delegated permissions are used by apps that have a signed-in user present.
Application Proxy:
Azure Active Directory's Application Proxy provides secure remote access to on-premises web applications.
References:
<https://docs.microsoft.com/en-us/azure/active-directory/develop/v2-permissions-and-consent>

NEW QUESTION 37

From the Azure portal, you are configuring an Azure policy. You plan to assign policies that use the DeployIfNotExist, AuditIfNotExist, Append, and Deny effects. Which effect requires a managed identity for the assignment?

- A. AuditIfNotExist
- B. Append
- C. DeployIfNotExist
- D. Deny

Answer: C

Explanation:

When Azure Policy runs the template in the deployIfNotExists policy definition, it does so using a managed identity.
References:
<https://docs.microsoft.com/bs-latn-ba/azure/governance/policy/how-to/remediate-resources>

NEW QUESTION 38

HOTSPOT

You need to create an Azure key vault. The solution must ensure that any object deleted from the key vault be retained for 90 days. How should you complete the command? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```
New-AzureRmKeyVault -VaultName 'KeyVault1' -ResourceGroupName 'RG1'
```

-Location 'East US'

<div style="border: 1px solid gray; padding: 2px; margin-bottom: 2px;"> ▼ </div> <ul style="list-style-type: none"> -EnabledForDeployment -EnablePurgeProtection -Tag 	<div style="border: 1px solid gray; padding: 2px; margin-bottom: 2px;"> ▼ </div> <ul style="list-style-type: none"> -Confirm -DefaultProfile -EnableSoftDelete -SKU
---	--

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: -EnablePurgeProtection
If specified, protection against immediate deletion is enabled for this vault; requires soft delete to be enabled as well.
Box 2: -EnableSoftDelete
Specifies that the soft-delete functionality is enabled for this key vault. When soft-delete is enabled, for a grace period, you can recover this key vault and its

contents after it is deleted.

References:

<https://docs.microsoft.com/en-us/powershell/module/azurerm.keyvault/new-azurermkeyvault>

NEW QUESTION 40

You have an Azure SQL database.

You implement Always Encrypted.

You need to ensure that application developers can retrieve and decrypt data in the database.

Which two pieces of information should you provide to the developers? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. a stored access policy
- B. a shared access signature (SAS)
- C. the column encryption key
- D. user credentials
- E. the column master key

Answer: CE

Explanation:

Always Encrypted uses two types of keys: column encryption keys and column master keys. A column encryption key is used to encrypt data in an encrypted column. A column master key is a key-protecting key that encrypts one or more column encryption keys.

References:

<https://docs.microsoft.com/en-us/sql/relational-databases/security/encryption/always-encrypted-database-engine>

NEW QUESTION 45

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your az-500 Exam with Our Prep Materials Via below:

<https://www.certleader.com/az-500-dumps.html>