

EC-Council

Exam Questions 312-50v12

Certified Ethical Hacker Exam (CEHv12)



NEW QUESTION 1

- (Exam Topic 3)

Juliet, a security researcher in an organization, was tasked with checking for the authenticity of images to be used in the organization's magazines. She used these images as a search query and tracked the original source and details of the images, which included photographs, profile pictures, and memes. Which of the following footprinting techniques did Rachel use to finish her task?

- A. Reverse image search
- B. Meta search engines
- C. Advanced image search
- D. Google advanced search

Answer: C

NEW QUESTION 2

- (Exam Topic 3)

What useful information is gathered during a successful Simple Mail Transfer Protocol (SMTP) enumeration?

- A. The two internal commands VRFY and EXPN provide a confirmation of valid users, email addresses, aliases, and mailing lists.
- B. Reveals the daily outgoing message limits before mailboxes are locked
- C. The internal command RCPT provides a list of ports open to message traffic.
- D. A list of all mail proxy server addresses used by the targeted host

Answer: A

NEW QUESTION 3

- (Exam Topic 3)

You want to do an ICMP scan on a remote computer using hping2. What is the proper syntax?

- A. hping2 host.domain.com
- B. hping2 --set-ICMP host.domain.com
- C. hping2 -i host.domain.com
- D. hping2 -1 host.domain.com

Answer: D

Explanation:

<http://www.carnal0wnage.com/papers/LSO-Hping2-Basics.pdf>

Most ping programs use ICMP echo requests and wait for echo replies to come back to test connectivity. Hping2 allows us to do the same testing using any IP packet, including ICMP, UDP, and TCP. This can be helpful since nowadays most firewalls or routers block ICMP. Hping2, by default, will use TCP, but, if you still want to send an ICMP scan, you can. We send ICMP scans using the -1 (one) mode. Basically the syntax will be hping2 -1 IPADDRESS

```
> [root@localhost hping2-rc3]# hping2 -1 192.168.0.100
> HPING 192.168.0.100 (eth0 192.168.0.100): icmp mode set, 28 headers + 0 data bytes
> len=46 ip=192.168.0.100 ttl=128 id=27118 icmp_seq=0 rtt=14.9 ms
> len=46 ip=192.168.0.100 ttl=128 id=27119 icmp_seq=1 rtt=0.5 ms
> len=46 ip=192.168.0.100 ttl=128 id=27120 icmp_seq=2 rtt=0.5 ms
> len=46 ip=192.168.0.100 ttl=128 id=27121 icmp_seq=3 rtt=1.5 ms
> len=46 ip=192.168.0.100 ttl=128 id=27122 icmp_seq=4 rtt=0.9 ms
> — 192.168.0.100 hping statistic —
> 5 packets tramitted, 5 packets received, 0% packet loss
> round-trip min/avg/max = 0.5/3.7/14.9 ms
> [root@localhost hping2-rc3]#
```

NEW QUESTION 4

- (Exam Topic 3)

Insecure direct object reference is a type of vulnerability where the application does not verify if the user is authorized to access the internal object via its name or key. Suppose a malicious user Rob tries to get access to the account of a benign user Ned.

Which of the following requests best illustrates an attempt to exploit an insecure direct object reference vulnerability?

- A. "GET /restricted/goldtransfer?to=Rob&from=1 or 1=1' HTTP/1.1Host: westbank.com"
- B. "GET /restricted/\r\n%00account%00Ned%00access HTTP/1.1 Host: westbank.com"
- C. "GET /restricted/accounts/?name=Ned HTTP/1.1 Host westbank.com"
- D. "GET /restricted/ HTTP/1.1 Host: westbank.com"

Answer: C

Explanation:

This question shows a classic example of an IDOR vulnerability. Rob substitutes Ned's name in the "name" parameter and if the developer has not fixed this vulnerability, then Rob will gain access to Ned's account. Below you will find more detailed information about IDOR vulnerability.

Insecure direct object references (IDOR) are a cybersecurity issue that occurs when a web application developer uses an identifier for direct access to an internal implementation object but provides no additional access control and/or authorization checks. For example, an IDOR vulnerability would happen if the URL of a transaction could be changed through client-side user input to show unauthorized data of another transaction.

Most web applications use simple IDs to reference objects. For example, a user in a database will usually be referred to via the user ID. The same user ID is the primary key to the database column containing user information and is generated automatically. The database key generation algorithm is very simple: it usually uses the next available integer. The same database ID generation mechanisms are used for all other types of database records.

The approach described above is legitimate but not recommended because it could enable the attacker to enumerate all users. If it's necessary to maintain this approach, the developer must at least make absolutely sure that more than just a reference is needed to access resources. For example, let's say that the web application displays transaction details using the following URL:

> <https://www.example.com/transaction.php?id=74656>

A malicious hacker could try to substitute the id parameter value 74656 with other similar values, for example

> <https://www.example.com/transaction.php?id=74657>

The 74657 transaction could be a valid transaction belonging to another user. The malicious hacker should not be authorized to see it. However, if the developer made an error, the attacker would see this transaction and hence we would have an insecure direct object reference vulnerability.

NEW QUESTION 5

- (Exam Topic 3)

Which among the following is the best example of the third step (delivery) in the cyber kill chain?

- A. An intruder sends a malicious attachment via email to a target.
- B. An intruder creates malware to be used as a malicious attachment to an email.
- C. An intruder's malware is triggered when a target opens a malicious email attachment.
- D. An intruder's malware is installed on a target's machine.

Answer: A

NEW QUESTION 6

- (Exam Topic 3)

Harper, a software engineer, is developing an email application. To ensure the confidentiality of email messages. Harper uses a symmetric-key block cipher having a classical 12- or 16-round Feistel network with a block size of 64 bits for encryption, which includes large 8 x 32-bit S-boxes (S1, S2, S3, S4) based on bent functions, modular addition and subtraction, key-dependent rotation, and XOR operations. This cipher also uses a masking key(Km1)and a rotation key (Kr1) for performing its functions. What is the algorithm employed by Harper to secure the email messages?

- A. CAST-128
- B. AES
- C. GOST block cipher
- D. DES

Answer: A

NEW QUESTION 7

- (Exam Topic 3)

A post-breach forensic investigation revealed that a known vulnerability in Apache Struts was to blame for the Equifax data breach that affected 143 million customers. A fix was available from the software vendor for several months prior to the intrusion. This is likely a failure in which of the following security processes?

- A. vendor risk management
- B. Security awareness training
- C. Secure deployment lifecycle
- D. Patch management

Answer: D

Explanation:

Patch management is that the method that helps acquire, test and install multiple patches (code changes) on existing applications and software tools on a pc, enabling systems to remain updated on existing patches and determining that patches are the suitable ones. Managing patches so becomes simple and simple. Patch Management is usually done by software system firms as a part of their internal efforts to mend problems with the various versions of software system programs and also to assist analyze existing software system programs and discover any potential lack of security features or different upgrades. Software patches help fix those problems that exist and are detected solely once the software's initial unharness. Patches mostly concern security while there are some patches that concern the particular practicality of programs as well.

NEW QUESTION 8

- (Exam Topic 3)

Calvin, a grey-hat hacker, targets a web application that has design flaws in its authentication mechanism. He enumerates usernames from the login form of the web application, which requests users to feed data and specifies the incorrect field in case of invalid credentials. Later, Calvin uses this information to perform social engineering.

Which of the following design flaws in the authentication mechanism is exploited by Calvin?

- A. Insecure transmission of credentials
- B. Verbose failure messages
- C. User impersonation
- D. Password reset mechanism

Answer: D

NEW QUESTION 9

- (Exam Topic 3)

Stella, a professional hacker, performs an attack on web services by exploiting a vulnerability that provides additional routing information in the SOAP header to support asynchronous communication. This further allows the transmission of web-service requests and response messages using different TCP connections.

Which of the following attack techniques is used by Stella to compromise the web services?

- A. XML injection

- B. WS-Address spoofing
- C. SOAPAction spoofing
- D. Web services parsing attacks

Answer: B

Explanation:

WS-Address provides additional routing information in the SOAP header to support asynchronous communication. This technique allows the transmission of web service requests and response messages using different TCP connections

<https://www.google.com/search?client=firefox-b-d&q=WS-Address+spoofing> CEH V11 Module 14 Page 1896

NEW QUESTION 10

- (Exam Topic 3)

Alex, a cloud security engineer working in Eyecloud Inc. is tasked with isolating applications from the underlying infrastructure and stimulating communication via well-defined channels. For this purpose, he used an open-source technology that helped him in developing, packaging, and running applications; further, the technology provides PaaS through OS-level visualization, delivers containerized software packages, and promotes fast software delivery. What is the cloud technology employed by Alex in the above scenario?

- A. Virtual machine
- B. Serverless computing
- C. Docker
- D. Zero trust network

Answer: C

NEW QUESTION 10

- (Exam Topic 3)

BitLocker encryption has been implemented for all the Windows-based computers in an organization. You are concerned that someone might lose their cryptographic key. Therefore, a mechanism was implemented to recover the keys from Active Directory. What is this mechanism called in cryptography?

- A. Key archival
- B. Key escrow.
- C. Certificate rollover
- D. Key renewal

Answer: B

NEW QUESTION 15

- (Exam Topic 3)

An attacker changes the profile information of a particular user (victim) on the target website. The attacker uses this string to update the victim's profile to a text file and then submit the data to the attacker's database.

```
<
iframe src=""http://www.vulnweb.com/updateif.php"" style=""display:none""
> < /iframe >
```

What is this type of attack (that can use either HTTP GET or HTTP POST) called?

- A. Browser Hacking
- B. Cross-Site Scripting
- C. SQL Injection
- D. Cross-Site Request Forgery

Answer: D

Explanation:

<https://book.hacktricks.xyz/pentesting-web/csrf-cross-site-request-forgery>

Cross-site request forgery (also known as CSRF) is a web security vulnerability that allows an attacker to induce users to perform actions that they do not intend to perform.

This is done by making a logged in user in the victim platform access an attacker controlled website and from there execute malicious JS code, send forms or retrieve "images" to the victims account.

In order to be able to abuse a CSRF vulnerability you first need to find a relevant action to abuse (change password or email, make the victim follow you on a social network, give you more privileges...). The session must rely only on cookies or HTTP Basic Authentication header, any other header can't be used to handle the session. An finally, there shouldn't be unpredictable parameters on the request.

Several counter-measures could be in place to avoid this vulnerability. Common defenses:

- SameSite cookies: If the session cookie is using this flag, you may not be able to send the cookie from arbitrary web sites.
- Cross-origin resource sharing: Depending on which kind of HTTP request you need to perform to abuse the relevant action, you may take into account the CORS policy of the victim site. Note that the CORS policy won't affect if you just want to send a GET request or a POST request from a form and you don't need to read the response.
- Ask for the password user to authorise the action.
- Resolve a captcha
- Read the Referrer or Origin headers. If a regex is used it could be bypassed for example with:
`http://mal.net?orig=http://example.com` (ends with the url) `http://example.com.mal.net` (starts with the url)
- Modify the name of the parameters of the Post or Get request
- Use a CSRF token in each session. This token has to be sent inside the request to confirm the action. This token could be protected with CORS.

Diagram Description automatically generated

NEW QUESTION 20

- (Exam Topic 3)

Louis, a professional hacker, had used specialized tools or search engines to encrypt all his browsing activity and navigate anonymously to obtain sensitive/hidden

information about official government or federal databases. After gathering the Information, he successfully performed an attack on the target government organization without being traced. Which of the following techniques is described in the above scenario?

- A. Dark web footprinting
- B. VoIP footpnting
- C. VPN footprinting
- D. website footprinting

Answer: A

Explanation:

The deep web is the layer of the online cyberspace that consists of web pages and content that are hidden and unindexed.

NEW QUESTION 21

- (Exam Topic 3)

Which of the following tactics uses malicious code to redirect users' web traffic?

- A. Spimming
- B. Pharming
- C. Phishing
- D. Spear-phishing

Answer: B

NEW QUESTION 22

- (Exam Topic 3)

Tony wants to integrate a 128-bit symmetric block cipher with key sizes of 128,192, or 256 bits into a software program, which involves 32 rounds of computational operations that include substitution and permutation operations on four 32-bit word blocks using 8-variable S-boxes with 4-bit entry and 4-bit exit. Which of the following algorithms includes all the above features and can be integrated by Tony into the software program?

- A. TEA
- B. CAST-128
- C. RC5
- D. serpent

Answer: D

NEW QUESTION 25

- (Exam Topic 3)

Sam, a web developer, was instructed to incorporate a hybrid encryption software program into a web application to secure email messages. Sam used an encryption software, which is a free implementation of the OpenPGP standard that uses both symmetric-key cryptography and asymmetric-key cryptography for improved speed and secure key exchange. What is the encryption software employed by Sam for securing the email messages?

- A. PGP
- B. S/MIME
- C. SMTP
- D. GPG

Answer: A

NEW QUESTION 29

- (Exam Topic 3)

Lewis, a professional hacker, targeted the IoT cameras and devices used by a target venture-capital firm. He used an information-gathering tool to collect information about the IoT devices connected to a network, open ports and services, and the attack surface area. Using this tool, he also generated statistical reports on broad usage patterns and trends. This tool helped Lewis continually monitor every reachable server and device on the Internet, further allowing him to exploit these devices in the network. Which of the following tools was employed by Lewis in the above scenario?

- A. Censys
- B. Wapiti
- C. NeuVector
- D. Lacework

Answer: A

Explanation:

Censys scans help the scientific community accurately study the Internet. The data is sometimes used to detect security problems and to inform operators of vulnerable systems so that they can fixed

NEW QUESTION 31

- (Exam Topic 3)

John is investigating web-application firewall logs and observers that someone is attempting to inject the following:

char buff[10]; buff[>o] - 'a':


What type of attack is this?

- A. CSRF
- B. XSS
- C. Buffer overflow
- D. SQL injection

Answer: C

Explanation:

Buffer overflow this attack is an anomaly that happens when software writing data to a buffer overflows the buffer's capacity, leading to adjacent memory locations being overwritten. In other words, an excessive amount of information is being passed into a container that doesn't have enough space, which information finishes up replacing data in adjacent containers. Buffer overflows are often exploited by attackers with a goal of modifying a computer's memory so as to undermine or take hold of program execution.

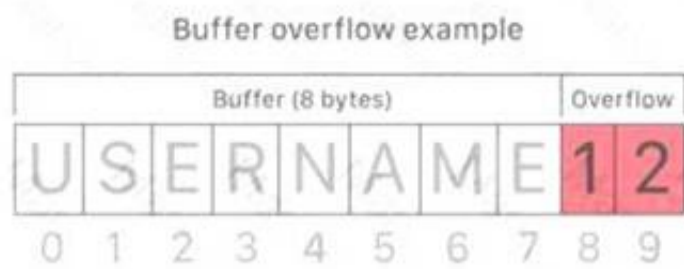

What's a buffer? A buffer, or data buffer, is a neighborhood of physical memory storage used to temporarily store data while it's being moved from one place to a different . These buffers typically sleep in RAM memory. Computers frequently use buffers to assist improve performance; latest hard drives cash in of buffering to efficiently access data, and lots of online services also use buffers. for instance , buffers are frequently utilized in online video streaming to stop interruption. When a video is streamed, the video player downloads and stores perhaps 20% of the video at a time during a buffer then streams from that buffer. This way, minor drops in connection speed or quick service disruptions won't affect the video stream performance. Buffers are designed to contain specific amounts of knowledge . Unless the program utilizing the buffer has built-in instructions to discard data when an excessive amount of is shipped to the buffer, the program will overwrite data in memory adjacent to the buffer. Buffer overflows are often exploited by attackers to corrupt software. Despite being well-understood, buffer overflow attacks are still a serious security problem that torment cyber-security teams. In 2014 a threat referred to as 'heartbleed' exposed many many users to attack due to a buffer overflow vulnerability in SSL software.

How do attackers exploit buffer overflows? An attacker can deliberately feed a carefully crafted input into a program which will cause the program to undertake and store that input during a buffer that isn't large enough, overwriting portions of memory connected to the buffer space. If the memory layout of the program is well-defined, the attacker can deliberately overwrite areas known to contain executable code. The attacker can then replace this code together with his own executable code, which may drastically change how the program is meant to figure .For example if the overwritten part in memory contains a pointer (an object that points to a different place in memory) the attacker's code could replace that code with another pointer that points to an exploit payload. this will transfer control of the entire program over to the attacker's code.

NEW QUESTION 35

- (Exam Topic 3)

Richard, an attacker, targets an MNC In this process, he uses a footprinting technique to gather as much information as possible. Using this technique, he gathers domain information such as the target domain name, contact details of its owner, expiry date, and creation date. With this information, he creates a map of the organization's network and misleads domain owners with social engineering to obtain internal details of its network. What type of footprinting technique is employed by Richard?

- A. VPN footprinting
- B. Email footprinting
- C. VoIP footprinting
- D. Whois footprinting

Answer: B

NEW QUESTION 38

- (Exam Topic 3)

You start performing a penetration test against a specific website and have decided to start from grabbing all the links from the main page. What Is the best Linux pipe to achieve your milestone?

- A. `dirb https://site.com | grep "site"`
- B. `curl -s https://sile.com | grep "< a href=\`http" | grep "Site-com- | cut -d "V" -f 2`
- C. `wget https://stte.com | grep "< a href=\`http" | grep "site.com"`
- D. `wgethttps://site.com | cut-d"http`

Answer: C

NEW QUESTION 40

- (Exam Topic 3)

John, a professional hacker, decided to use DNS to perform data exfiltration on a target network, in this process, he embedded malicious data into the DNS protocol packets that even DNSSEC cannot detect. Using this technique. John successfully injected malware to bypass a firewall and maintained communication with the victim machine and C&C server. What is the technique employed by John to bypass the firewall?

- A. DNS cache snooping
- B. DNSSEC zone walking
- C. DNS tunneling method
- D. DNS enumeration

Answer: C

Explanation:

DNS tunneling may be a method wont to send data over the DNS protocol, a protocol which has never been intended for data transfer. due to that, people tend to overlook it and it's become a well-liked but effective tool in many attacks. Most popular use case for DNS tunneling is obtaining free internet through bypassing captive portals at airports, hotels, or if you are feeling patient the not-so-cheap on the wing Wi-Fi. On those shared internet hotspots HTTP traffic is blocked until a username/password is provided, however DNS traffic is usually still allowed within the background: we will encode our HTTP traffic over DNS and voilà, we've internet access. This sounds fun but reality is, browsing anything on DNS tunneling is slow. Like, back to 1998 slow. Another more dangerous use of DNS tunneling would be bypassing network security devices (Firewalls, DLP appliances...) to line up an immediate and unmonitored communications channel on an organisation's network. Possibilities here are endless: Data exfiltration, fixing another penetration testing tool... you name it. To make it even more worrying, there's an outsized amount of easy to use DNS tunneling tools out there. There's even a minimum of one VPN over DNS protocol provider (warning: the planning of the

web site is hideous, making me doubt on the legitimacy of it).As a pentester all this is often great, as a network admin not such a lot .

How does it work:For those that ignoramus about DNS protocol but still made it here, i feel you deserve a really brief explanation on what DNS does: DNS is sort of a phonebook for the web , it translates URLs (human-friendly language, the person's name), into an IP address (machine-friendly language, the phone number). That helps us remember many websites, same as we will remember many people's names.For those that know what DNS is i might suggest looking here for a fast refresh on DNS protocol, but briefly what you would like to understand is:

- A Record: Maps a website name to an IP address.example.com ? 12.34.52.67
- NS Record (a.k.a. Nameserver record): Maps a website name to an inventory of DNS servers, just in case our website is hosted in multiple servers.example.com ? server1.example.com, server2.example.com

Who is involved in DNS tunneling?

- Client. Will launch DNS requests with data in them to a website .
- One Domain that we will configure. So DNS servers will redirect its requests to an outlined server of our own.
- Server. this is often the defined nameserver which can ultimately receive the DNS requests.

The 6 Steps in DNS tunneling (simplified):

1. The client encodes data during a DNS request. The way it does this is often by prepending a bit of knowledge within the domain of the request. for instance : mypieceofdata.server1.example.com
2. The DNS request goes bent a DNS server.
3. The DNS server finds out the A register of your domain with the IP address of your server.
4. The request for mypieceofdata.server1.example.com is forwarded to the server.
5. The server processes regardless of the mypieceofdata was alleged to do. Let's assume it had been an HTTP request.
6. The server replies back over DNS and woop woop, we've got signal.

Bypassing Firewalls through the DNS Tunneling Method DNS operates using UDP, and it has a 255-byte limit on outbound queries. Moreover, it allows only alphanumeric characters and hyphens. Such small size constraints on external queries allow DNS to be used as an ideal choice to perform data exfiltration by various malicious entities. Since corrupt or malicious data can be secretly embedded into the DNS protocol packets, even DNSSEC cannot detect the abnormality in DNS tunneling. It is effectively used by malware to bypass the firewall to maintain communication between the victim machine and the C&C server. Tools such as NSTX (<https://sourceforge.net>), Heyoka (<http://heyoka.sourceforge.net>), and Iodine (<https://code.kryo.se>) use this technique of tunneling traffic across DNS port 53. CEH v11 Module 12 Page 994

NEW QUESTION 45

- (Exam Topic 3)

Which Metasploit Framework tool can help penetration tester for evading Anti-virus Systems?

- A. msfpayload
- B. msfcli
- C. msfd
- D. msfencode

Answer: D

Explanation:

<https://www.offensive-security.com/metasploit-unleashed/msfencode/>

One of the best ways to avoid being stopped by antivirus software is to encode our payload with msfencode. Msfencode is a useful tool that alters the code in an executable so that it looks different to antivirus software but will still run the same way. Much as the binary attachment in email is encoded in Base64, msfencode encodes the original executable in a new binary. Then, when the executable is run, msfencode decodes the original code into memory and exe-cutes it.

NEW QUESTION 50

- (Exam Topic 3)

Which of the following is a passive wireless packet analyzer that works on Linux-based systems?

- A. Burp Suite
- B. OpenVAS
- C. tshark
- D. Kismet

Answer: C

NEW QUESTION 52

- (Exam Topic 3)

Jake, a professional hacker, installed spyware on a target iPhone to spy on the target user's activities. He can take complete control of the target mobile device by jailbreaking the device remotely and record audio, capture screenshots, and monitor all phone calls and SMS messages. What is the type of spyware that Jake used to infect the target device?

- A. DroidSheep
- B. Andorot
- C. Zscaler
- D. Trident

Answer: B

NEW QUESTION 53

- (Exam Topic 3)

An attacker can employ many methods to perform social engineering against unsuspecting employees, including scareware. What is the best example of a scareware attack?

- A. A pop-up appears to a user stating, "You have won a free cruise! Click here to claim your prize!"
- B. A banner appears to a user stating, "Your account has been locke
- C. Click here to reset your password and unlock your account."
- D. A banner appears to a user stating, "Your Amazon order has been delaye
- E. Click here to find out your new delivery date."
- F. A pop-up appears to a user stating, "Your computer may have been infected with spywar
- G. Click here to install an anti-spyware tool to resolve this issue."

Answer: D

NEW QUESTION 56

- (Exam Topic 3)

Which protocol is used for setting up secure channels between two devices, typically in VPNs?

- A. PEM
- B. ppp
- C. IPSEC
- D. SET

Answer: C

NEW QUESTION 60

- (Exam Topic 3)

Thomas, a cloud security professional, is performing security assessment on cloud services to identify any loopholes. He detects a vulnerability in a bare-metal cloud server that can enable hackers to implant malicious backdoors in its firmware. He also identified that an installed backdoor can persist even if the server is reallocated to new clients or businesses that use it as an IaaS.

What is the type of cloud attack that can be performed by exploiting the vulnerability discussed in the above scenario?

- A. Man-in-the-cloud (MITC) attack
- B. Cloud cryptojacking
- C. Cloudborne attack
- D. Metadata spoofing attack

Answer: C

NEW QUESTION 63

- (Exam Topic 3)

Jack, a professional hacker, targets an organization and performs vulnerability scanning on the target web server to identify any possible weaknesses, vulnerabilities, and misconfigurations. In this process, Jack uses an automated tool that eases his work and performs vulnerability scanning to find hosts, services, and other vulnerabilities in the target server. Which of the following tools is used by Jack to perform vulnerability scanning?

- A. Infoga
- B. WebCopier Pro
- C. Netsparker
- D. NCollector Studio

Answer: C

NEW QUESTION 67

- (Exam Topic 3)

A "Server-Side Includes" attack refers to the exploitation of a web application by injecting scripts in HTML pages or executing arbitrary code remotely.

Which web-page file type, if it exists on the web server, is a strong indication that the server is vulnerable to this kind of attack?

- A. .stm
- B. .html
- C. .rss
- D. .cms

Answer: A

NEW QUESTION 72

- (Exam Topic 3)

Which of these is capable of searching for and locating rogue access points?

- A. HIDS
- B. WISS
- C. WIPS
- D. NIDS

Answer: C

Explanation:

A Wireless Intrusion Prevention System (WIPS) is a network device that monitors the radio spectrum for the presence of unauthorized access points (intrusion detection), and can automatically take countermeasures (intrusion prevention).

NEW QUESTION 76

- (Exam Topic 3)

To create a botnet, the attacker can use several techniques to scan vulnerable machines. The attacker first collects information about a large number of vulnerable machines to create a list. Subsequently, they infect the machines. The list is divided by assigning half of the list to the newly compromised machines. The scanning process runs simultaneously. This technique ensures the spreading and installation of malicious code in little time.

Which technique is discussed here?

- A. Hit-list-scanning technique
- B. Topological scanning technique
- C. Subnet scanning technique
- D. Permutation scanning technique

Answer: A

Explanation:

One of the biggest problems a worm faces in achieving a very fast rate of infection is “getting off the ground.” although a worm spreads exponentially throughout the early stages of infection, the time needed to infect say the first 10,000 hosts dominates the infection time.

There is a straightforward way for an active worm a simple this obstacle, that we term hit-list scanning. Before the worm is free, the worm author collects a listing of say ten,000 to 50,000 potentially vulnerable machines, ideally ones with sensible network connections. The worm, when released onto an initial machine on this hit-list, begins scanning down the list. once it infects a machine, it divides the hit-list in half, communicating half to the recipient worm, keeping the other half. This fast division ensures that even if only 10-20% of the machines on the hit-list are actually vulnerable, an active worm can quickly bear the hit-list and establish itself on all vulnerable machines in only some seconds. though the hit-list could begin at 200 kilobytes, it quickly shrinks to nothing during the partitioning. This provides a great benefit in constructing a quick worm by speeding the initial infection.

The hit-list needn't be perfect: a simple list of machines running a selected server sort could serve, though larger accuracy can improve the unfold. The hit-list itself is generated victimization one or many of the following techniques, ready well before, typically with very little concern of detection.

- Stealthy scans. Portscans are so common and then wide ignored that even a quick scan of the whole net would be unlikely to attract law enforcement attention or over gentle comment within the incident response community. However, for attackers wish to be particularly careful, a randomised sneaky scan taking many months would be not possible to attract much attention, as most intrusion detection systems are not currently capable of detecting such low-profile scans. Some portion of the scan would be out of date by the time it had been used, however abundant of it'd not.
- Distributed scanning. an assailant might scan the web using a few dozen to some thousand already-compromised “zombies,” the same as what DDOS attackers assemble in a very fairly routine fashion. Such distributed scanning has already been seen within the wild—Lawrence Berkeley National Laboratory received ten throughout the past year.
- DNS searches. Assemble a list of domains (for example, by using wide offered spam mail lists, or trolling the address registries). The DNS will then be searched for the science addresses of mail-servers (via mx records) or net servers (by looking for www.domain.com).
- Spiders. For net server worms (like Code Red), use Web-crawling techniques the same as search engines so as to produce a list of most Internet-connected web sites. this would be unlikely to draw in serious attention.
- Public surveys. for many potential targets there may be surveys available listing them, like the Netcraft survey.
- Just listen. Some applications, like peer-to-peer networks, wind up advertising many of their servers.

Similarly, many previous worms effectively broadcast that the infected machine is vulnerable to further attack. easy, because of its widespread scanning, during the Code Red I infection it was easy to select up the addresses of upwards of 300,000 vulnerable IIS servers—because each came knock on everyone's door!

NEW QUESTION 77

- (Exam Topic 3)

Clark, a professional hacker, attempted to perform a Btlejacking attack using an automated tool, Btlejack, and hardware tool, micro:bit. This attack allowed Clark to hijack, read, and export sensitive information shared between connected devices. To perform this attack, Clark executed various btlejack commands. Which of the following commands was used by Clark to hijack the connections?

- A. btlejack-f 0x129f3244-j
- B. btlejack -c any
- C. btlejack -d /dev/ttyACM0 -d /dev/ttyACM2 -s
- D. btlejack -f 0x9c68fd30 -t -m 0x1 ffffffff

Answer: D

NEW QUESTION 79

- (Exam Topic 3)

You want to analyze packets on your wireless network. Which program would you use?

- A. Wireshark with Airpcap
- B. Airsnort with Airpcap
- C. Wireshark with Winpcap
- D. Ethereal with Winpcap

Answer: A

Explanation:

<https://support.riverbed.com/content/support/software/steelcentral-npm/airpcap.html>

Since this question refers specifically to analyzing a wireless network, it is obvious that we need an option with AirPcap (Riverbed AirPcap USB-based adapters capture 802.11 wireless traffic for analysis). Since it works with two traffic analyzers SteelCentral Packet Analyzer (Cascade Pilot) or Wireshark, the correct option would be "Wireshark with Airpcap."

NOTE: AirPcap adapters no longer available for sale effective January 1, 2018, but a question on this topic may occur on your exam.

NEW QUESTION 84

- (Exam Topic 3)

Given below are different steps involved in the vulnerability-management life cycle.

- 1) Remediation
- 2) Identify assets and create a baseline
- 3) Verification
- 4) Monitor
- 5) Vulnerability scan
- 6) Risk assessment

Identify the correct sequence of steps involved in vulnerability management.

- A. 2-->5-->6-->1-->3-->4
- B. 2-->1-->5-->6-->4-->3
- C. 2-->4-->5-->3-->6--> 1
- D. 1-->2-->3-->4-->5-->6

Answer: A

NEW QUESTION 87

- (Exam Topic 3)

Mary, a penetration tester, has found password hashes in a client system she managed to breach. She needs to use these passwords to continue with the test, but she does not have time to find the passwords that correspond to these hashes. Which type of attack can she implement in order to continue?

- A. LLMNR/NBT-NS poisoning
- B. Internal monologue attack
- C. Pass the ticket
- D. Pass the hash

Answer: D

NEW QUESTION 92

- (Exam Topic 3)

if you send a TCP ACK segment to a known closed port on a firewall but it does not respond with an RST. what do you know about the firewall you are scanning?

- A. There is no firewall in place.
- B. This event does not tell you encrypting about the firewall.
- C. It is a stateful firewall
- D. It Is a non-stateful firewall.

Answer: B

NEW QUESTION 94

- (Exam Topic 3)

Which of the following Google advanced search operators helps an attacker in gathering information about websites that are similar to a specified target URL?

- A. [inurl:]
- B. [related:]
- C. [info:]
- D. [site:]

Answer: B

Explanation:

related:This operator displays websites that are similar or related to the URL specified.

NEW QUESTION 97

- (Exam Topic 3)

Bob, your senior colleague, has sent you a mail regarding a deal with one of the clients. You are requested to accept the offer and you oblige. After 2 days, Bab denies that he had ever sent a mail. What do you want to “know” to prove yourself that it was Bob who had send a mail?

- A. Non-Repudiation
- B. Integrity
- C. Authentication
- D. Confidentiality

Answer: A

Explanation:

Non-repudiation is the assurance that someone cannot deny the validity of something. Non-repudiation is a legal concept that is widely used in information security and refers to a service, which provides proof of the origin of data and the integrity of the data. In other words, non-repudiation makes it very difficult to successfully deny who/where a message came from as well as the authenticity and integrity of that message.

NEW QUESTION 102

- (Exam Topic 3)

You are a security officer of a company. You had an alert from IDS that indicates that one PC on your Intranet is connected to a blacklisted IP address (C2 Server) on the Internet. The IP address was blacklisted just before the alert. You are starting an investigation to roughly analyze the severity of the situation. Which of the following is appropriate to analyze?

- A. IDS log
- B. Event logs on domain controller
- C. Internet Firewall/Proxy log.
- D. Event logs on the PC

Answer: C

NEW QUESTION 106

- (Exam Topic 3)

_____ is a type of phishing that targets high-profile executives such as CEOs, CFOs, politicians, and celebrities who have access to confidential and highly valuable information.

- A. Spear phishing
- B. Whaling
- C. Vishing
- D. Phishing

Answer: B

NEW QUESTION 108

- (Exam Topic 3)

If executives are found liable for not properly protecting their company's assets and information systems, what type of law would apply in this situation?

- A. Criminal
- B. International
- C. Common
- D. Civil

Answer: D

NEW QUESTION 112

- (Exam Topic 3)

Stephen, an attacker, targeted the industrial control systems of an organization. He generated a fraudulent email with a malicious attachment and sent it to employees of the target organization. An employee who manages the sales software of the operational plant opened the fraudulent email and clicked on the malicious attachment. This resulted in the malicious attachment being downloaded and malware being injected into the sales software maintained in the victim's system. Further, the malware propagated itself to other networked systems, finally damaging the industrial automation components. What is the attack technique used by Stephen to damage the industrial systems?

- A. Spear-phishing attack
- B. SMishing attack
- C. Reconnaissance attack
- D. HMI-based attack

Answer: A

NEW QUESTION 115

- (Exam Topic 3)

You have compromised a server on a network and successfully opened a shell. You aimed to identify all operating systems running on the network. However, as you attempt to fingerprint all machines in the network using the nmap syntax below, it is not going through.

```
invictus@victim_server.~$ nmap -T4 -O 10.10.0.0/24 TCP/IP fingerprinting (for OS scan) xxxxxxxx xxxxxxxc. QUITTING!
```

What seems to be wrong?

- A. The nmap syntax is wrong.
- B. This is a common behavior for a corrupted nmap application.
- C. The outgoing TCP/IP fingerprinting is blocked by the host firewall.
- D. OS Scan requires root privileges.

Answer: D

NEW QUESTION 119

- (Exam Topic 3)

A group of hackers were roaming around a bank office building in a city, driving a luxury car. They were using hacking tools on their laptop with the intention to find a free-access wireless network. What is this hacking process known as?

- A. GPS mapping
- B. Spectrum analysis
- C. Wardriving
- D. Wireless sniffing

Answer: C

NEW QUESTION 122

- (Exam Topic 3)

Eric, a cloud security engineer, implements a technique for securing the cloud resources used by his organization. This technique assumes by default that a user attempting to access the network is not an authentic entity and verifies every incoming connection before allowing access to the network. Using this technique, he also imposed conditions such that employees can access only the resources required for their role.

What is the technique employed by Eric to secure cloud resources?

- A. Serverless computing
- B. Demilitarized zone
- C. Container technology
- D. Zero trust network

Answer: D

NEW QUESTION 124

- (Exam Topic 3)

Attacker Simon targeted the communication network of an organization and disabled the security controls of NetNTLMv1 by modifying the values of LMCompatibilityLevel, NTLMMinClientSec, and RestrictSendingNTLMTraffic. He then extracted all the non-network logon tokens from all the active processes to masquerade as a legitimate user to launch further attacks. What is the type of attack performed by Simon?

- A. Internal monologue attack
- B. Combinator attack
- C. Rainbow table attack
- D. Dictionary attack

Answer: A

NEW QUESTION 129

- (Exam Topic 3)

Mike, a security engineer, was recently hired by BigFox Ltd. The company recently experienced disastrous DoS attacks. The management had instructed Mike to build defensive strategies for the company's IT infrastructure to thwart DoS/DDoS attacks. Mike deployed some countermeasures to handle jamming and scrambling attacks. What is the countermeasure Mike applied to defend against jamming and scrambling attacks?

- A. Allow the usage of functions such as gets and strcpy
- B. Allow the transmission of all types of addressed packets at the ISP level
- C. Implement cognitive radios in the physical layer
- D. A Disable TCP SYN cookie protection

Answer: D

NEW QUESTION 133

- (Exam Topic 3)

Which among the following is the best example of the hacking concept called "clearing tracks"?

- A. After a system is breached, a hacker creates a backdoor to allow re-entry into a system.
- B. During a cyberattack, a hacker injects a rootkit into a server.
- C. An attacker gains access to a server through an exploitable vulnerability.
- D. During a cyberattack, a hacker corrupts the event logs on all machines.

Answer: D

NEW QUESTION 136

- (Exam Topic 3)

Robert, a professional hacker, is attempting to execute a fault injection attack on a target IoT device. In this process, he injects faults into the power supply that can be used for remote execution, also causing the skipping of key instructions. He also injects faults into the clock network used for delivering a synchronized signal across the chip.

Which of the following types of fault injection attack is performed by Robert in the above scenario?

- A. Frequency/voltage tampering
- B. Optical, electromagnetic fault injection (EMFI)
- C. Temperature attack
- D. Power/clock/reset glitching

Answer: D

Explanation:

These types of attacks occur when faults or glitches are INJECTED into the Power supply that can be used for remote execution.

NEW QUESTION 137

- (Exam Topic 3)

Josh has finished scanning a network and has discovered multiple vulnerable services. He knows that several of these usually have protections against external sources but are frequently susceptible to internal users. He decides to draft an email, spoof the sender as the internal IT team, and attach a malicious file disguised as a financial spreadsheet. Before Josh sends the email, he decides to investigate other methods of getting the file onto the system. For this particular attempt, what was the last stage of the cyber kill chain that Josh performed?

- A. Exploitation
- B. Weaponization
- C. Delivery
- D. Reconnaissance

Answer: B

NEW QUESTION 141

- (Exam Topic 3)

Upon establishing his new startup, Tom hired a cloud service provider (CSP) but was dissatisfied with their service and wanted to move to another CSP. What part of the contract might prevent him from doing so?

- A. Virtualization
- B. Lock-in
- C. Lock-down
- D. Lock-up

Answer: B

NEW QUESTION 143

- (Exam Topic 3)

Firewalk has just completed the second phase (the scanning phase) and a technician receives the output shown below. What conclusions can be drawn based on these scan results?

TCP port 21 no response TCP port 22 no response
TCP port 23 Time-to-live exceeded

- A. The lack of response from ports 21 and 22 indicate that those services are not running on the destination server

- B. The scan on port 23 was able to make a connection to the destination host prompting the firewall to respond with a TTL error
- C. The scan on port 23 passed through the filtering device
- D. This indicates that port 23 was not blocked at the firewall
- E. The firewall itself is blocking ports 21 through 23 and a service is listening on port 23 of the target host

Answer: C

NEW QUESTION 148

- (Exam Topic 3)

Which wireless security protocol replaces the personal pre-shared key (PSK) authentication with Simultaneous Authentication of Equals (SAE) and is therefore resistant to offline dictionary attacks?

- A. WPA3-Personal
- B. WPA2-Enterprise
- C. Bluetooth
- D. ZigBee

Answer: A

NEW QUESTION 153

- (Exam Topic 3)

Jacob works as a system administrator in an organization. He wants to extract the source code of a mobile application and disassemble the application to analyze its design flaws. Using this technique, he wants to fix any bugs in the application, discover underlying vulnerabilities, and improve defense strategies against attacks.

What is the technique used by Jacob in the above scenario to improve the security of the mobile application?

- A. Reverse engineering
- B. App sandboxing
- C. Jailbreaking
- D. Social engineering

Answer: A

NEW QUESTION 155

- (Exam Topic 3)

Richard, an attacker, targets an MNC. In this process, he uses a footprinting technique to gather as much information as possible. Using this technique, he gathers domain information such as the target domain name, contact details of its owner, expiry date, and creation date. With this information, he creates a map of the organization's network and misleads domain owners with social engineering to obtain internal details of its network. What type of footprinting technique is employed by Richard?

- A. VoIP footprinting
- B. VPN footprinting
- C. Whois footprinting
- D. Email footprinting

Answer: C

Explanation:

WHOIS (pronounced because the phrase who is) may be a query and response protocol and whois footprinting may be a method for glance information about ownership of a website name as following:

- name details
- Contact details contain phone no. and email address of the owner
- Registration date for the name
- Expire date for the name
- name servers

NEW QUESTION 160

- (Exam Topic 3)

CyberTech Inc. recently experienced SQL injection attacks on its official website. The company appointed Bob, a security professional, to build and incorporate defensive strategies against such attacks. Bob adopted a practice whereby only a list of entities such as the data type, range, size, and value, which have been approved for secured access, is accepted. What is the defensive technique employed by Bob in the above scenario?

- A. Output encoding
- B. Enforce least privileges
- C. Whitelist validation
- D. Blacklist validation

Answer: C

NEW QUESTION 164

- (Exam Topic 3)

Mason, a professional hacker, targets an organization and spreads Emotet malware through malicious script. After infecting the victim's device, Mason further used Emotet to spread the infection across local networks and beyond to compromise as many machines as possible. In this process, he used a tool, which is a self-extracting RAR file, to retrieve information related to network resources such as writable share drives. What is the tool employed by Mason in the above scenario?

- A. NetPass.exe
- B. Outlook scraper
- C. WebBrowserPassView
- D. Credential enumerator

Answer: D

NEW QUESTION 168

- (Exam Topic 3)

Which of the following antennas is commonly used in communications for a frequency band of 10 MHz to VHF and UHF?

- A. Yagi antenna
- B. Dipole antenna
- C. Parabolic grid antenna
- D. Omnidirectional antenna

Answer: A

NEW QUESTION 169

- (Exam Topic 3)

On performing a risk assessment, you need to determine the potential impacts when some of the critical business processes of the company interrupt its service. What is the name of the process by which you can determine those critical businesses?

- A. Emergency Plan Response (EPR)
- B. Business Impact Analysis (BIA)
- C. Risk Mitigation
- D. Disaster Recovery Planning (DRP)

Answer: B

NEW QUESTION 173

- (Exam Topic 3)

```
#!/usr/bin/python import socket buffer=["A"] counter=50 while len(buffer)<=100: buffer.append ("A"*counter)
counter=counter+50 commands= ["HELP","STATS .","RTIME .","LTIME. ","SRUN .","TRUN
","GMON
","GDOG .","KSTET .","GTER .","HTER .","LTER .","KSTAN ."] for command in
commands: for
buffstring in buffer: print "Exploiting" +command + "."+str(len(buffstring)) s=socket.socket(socket.AF_INET,
socket.SOCK_STREAM) s.connect(('127.0.0.1', 9999)) s.recv(50) s.send(command+buffstring) s.close() What is the code written for?
```

- A. Denial-of-service (DOS)
- B. Buffer Overflow
- C. Bruteforce
- D. Encryption

Answer: B

NEW QUESTION 176

- (Exam Topic 3)

Which tier in the N-tier application architecture is responsible for moving and processing data between the tiers?

- A. Presentation tier
- B. Application Layer
- C. Logic tier
- D. Data tier

Answer: C

NEW QUESTION 177

- (Exam Topic 3)

A security analyst is performing an audit on the network to determine if there are any deviations from the security policies in place. The analyst discovers that a user from the IT department had a dial-out modem installed.

Which security policy must the security analyst check to see if dial-out modems are allowed?

- A. Firewall-management policy
- B. Acceptable-use policy
- C. Permissive policy
- D. Remote-access policy

Answer: D

NEW QUESTION 182

- (Exam Topic 3)

in this form of encryption algorithm, every Individual block contains 64-bit data, and three keys are used, where each key consists of 56 bits. Which is this encryption algorithm?

- A. IDEA
- B. Triple Data Encryption standard
- C. MDS encryption algorithm
- D. AES

Answer: B

Explanation:

Triple DES is another mode of DES operation. It takes three 64-bit keys, for an overall key length of 192 bits. In Stealth, you merely type within the entire 192-bit

(24 character) key instead of entering each of the three keys individually. The Triple DES DLL then breaks the user-provided key into three subkeys, padding the keys if necessary in order that they are each 64 bits long. The procedure for encryption is strictly an equivalent as regular DES, but it's repeated 3 times, hence the name Triple DES. The info is encrypted with the primary key, decrypted with the second key, and eventually encrypted again with the third key. Triple DES runs 3 times slower than DES, but is far safer if used properly. The procedure for decrypting something is that the same because the procedure for encryption, except it's executed in reverse. Like DES, data is encrypted and decrypted in 64-bit chunks. Although the input key for DES is 64 bits long, the particular key employed by DES is merely 56 bits long. The smallest amount significant (right-most) bit in each byte may be a parity, and will be set in order that there are always an odd number of 1s in every byte. These parity bits are ignored, so only the seven most vital bits of every byte are used, leading to a key length of 56 bits. This suggests that the effective key strength for Triple DES is really 168 bits because each of the three keys contains 8 parity bits that aren't used during the encryption process.

Triple DES Modes

- Triple ECB (Electronic Code Book)**• This variant of Triple DES works precisely the same way because the ECB mode of DES. • this is often the foremost commonly used mode of operation.
- Triple CBC (Cipher Block Chaining)**• This method is extremely almost like the quality DES CBC mode. • like Triple ECB, the effective key length is 168 bits and keys are utilized in an equivalent manner, as described above, but the chaining features of CBC mode also are employed. • the primary 64-bit key acts because the Initialization Vector to DES. • Triple ECB is then executed for one 64-bit block of plaintext. • The resulting ciphertext is then XORed with subsequent plaintext block to be encrypted, and therefore the procedure is repeated. • This method adds an additional layer of security to Triple DES and is therefore safer than Triple ECB, although it's not used as widely as Triple ECB.

NEW QUESTION 187

- (Exam Topic 3)

Mary found a high vulnerability during a vulnerability scan and notified her server team. After analysis, they sent her proof that a fix to that issue had already been applied. The vulnerability that Mary found is called what?

- A. False-negative
- B. False-positive
- C. Brute force attack
- D. Backdoor

Answer: B

Explanation:

<https://www.infocycle.com/blog/2019/02/16/cybersecurity-101-what-you-need-to-know-about-false-positives-an>

False positives are mislabeled security alerts, indicating there is a threat when in actuality, there isn't. These false/non-malicious alerts (SIEM events) increase noise for already over-worked security teams and can include software bugs, poorly written software, or unrecognized network traffic.

False negatives are uncaught cyber threats — overlooked by security tooling because they're dormant, highly sophisticated (i.e. file-less or capable of lateral movement) or the security infrastructure in place lacks the technological ability to detect these attacks.

NEW QUESTION 188

- (Exam Topic 3)

Attacker Rony installed a rogue access point within an organization's perimeter and attempted to intrude into its internal network. Johnson, a security auditor, identified some unusual traffic in the internal network that is aimed at cracking the authentication mechanism. He immediately turned off the targeted network and tested for any weak and outdated security mechanisms that are open to attack. What is the type of vulnerability assessment performed by Johnson in the above scenario?

- A. Host-based assessment
- B. Wireless network assessment
- C. Application assessment
- D. Distributed assessment

Answer: B

Explanation:

Wireless network assessment determines the vulnerabilities in an organization's wireless networks. In the past, wireless networks used weak and defective data encryption mechanisms. Now, wireless network standards have evolved, but many networks still use weak and outdated security mechanisms and are open to attack. Wireless network assessments try to attack wireless authentication mechanisms and gain unauthorized access. This type of assessment tests wireless networks and identifies rogue networks that may exist within an organization's perimeter. These assessments audit client-specified sites with a wireless network. They sniff wireless network traffic and try to crack encryption keys. Auditors test other network access if they gain access to the wireless network.

NEW QUESTION 189

- (Exam Topic 3)

Sam is a penetration tester hired by Inception Tech, a security organization. He was asked to perform port scanning on a target host in the network. While performing the given task, Sam sends FIN/ACK probes and determines that an RST packet is sent in response by the target host, indicating that the port is closed. What is the port scanning technique used by Sam to discover open ports?

- A. Xmas scan
- B. IDLE/IPID header scan
- C. TCP Maimon scan
- D. ACK flag probe scan

Answer: C

Explanation:

TCP Maimon scan

This scan technique is very similar to NULL, FIN, and Xmas scan, but the probe used here is FIN/ACK. In most cases, to determine if the port is open or closed, the RST packet should be generated

as a response to a probe request. However, in many BSD systems, the port is open if the packet gets dropped in response to a probe.

<https://nmap.org/book/scan-methods-maimon-scan.html> How Nmap interprets responses to a Maimon scan probe

Probe Response Assigned State

No response received (even after retransmissions) open|filtered TCP RST packet closed

ICMP unreachable error (type 3, code 1, 2, 3, 9, 10, or 13) filtered

NEW QUESTION 194

- (Exam Topic 3)

In an attempt to damage the reputation of a competitor organization, Hailey, a professional hacker, gathers a list of employee and client email addresses and other related information by using various search engines, social networking sites, and web spidering tools. In this process, she also uses an automated tool to gather a list of words from the target website to further perform a brute-force attack on the previously gathered email addresses.

What is the tool used by Hailey for gathering a list of words from the target website?

- A. Shadowsocks
- B. CeWL
- C. Psiphon
- D. Orbot

Answer: B

NEW QUESTION 196

- (Exam Topic 3)

Bob wants to ensure that Alice can check whether his message has been tampered with. He creates a checksum of the message and encrypts it using asymmetric cryptography. What key does Bob use to encrypt the checksum for accomplishing this goal?

- A. Alice's private key
- B. Alice's public key
- C. His own private key
- D. His own public key

Answer: B

NEW QUESTION 200

- (Exam Topic 3)

In both pharming and phishing attacks, an attacker can create websites that look similar to legitimate sites with the intent of collecting personal identifiable information from its victims.

What is the difference between pharming and phishing attacks?

- A. In a pharming attack, a victim is redirected to a fake website by modifying their host configuration file or by exploiting vulnerabilities in DN
- B. In a phishing attack, an attacker provides the victim with a URL that is either misspelled or looks similar to the actual websites domain name
- C. In a phishing attack, a victim is redirected to a fake website by modifying their host configuration file or by exploiting vulnerabilities in DN
- D. In a pharming attack, an attacker provides the victim with a URL that is either misspelled or looks very similar to the actual websites domain name
- E. Both pharming and phishing attacks are purely technical and are not considered forms of social engineering
- F. Both pharming and phishing attacks are identical

Answer: A

NEW QUESTION 205

- (Exam Topic 3)

When considering how an attacker may exploit a web server, what is web server footprinting?

- A. When an attacker implements a vulnerability scanner to identify weaknesses
- B. When an attacker creates a complete profile of the site's external links and file structures
- C. When an attacker gathers system-level data, including account details and server names
- D. When an attacker uses a brute-force attack to crack a web-server password

Answer: B

NEW QUESTION 210

- (Exam Topic 3)

After an audit, the auditors Inform you that there is a critical finding that you must tackle Immediately. You read the audit report, and the problem is the service running on port 389. Which service Is this and how can you tackle the problem?

- A. The service is LDA
- B. and you must change it to 636. which is LDPAPS.
- C. The service is NT
- D. and you have to change It from UDP to TCP in order to encrypt it
- E. The findings do not require immediate actions and are only suggestions.
- F. The service is SMTP, and you must change it to SMIM
- G. which is an encrypted way to send emails.

Answer: A

Explanation:

https://en.wikipedia.org/wiki/Lightweight_Directory_Access_Protocol

LDAP, the Lightweight Directory Access Protocol, is a mature, flexible, and well supported standards-based mechanism for interacting with directory servers. It's often used for authentication and storing information about users, groups, and applications, but an LDAP directory server is a fairly general-purpose data store and can be used in a wide variety of applications.

The LDAP protocol can deal in quite a bit of sensitive data: Active Directory usernames, login attempts, failed-login notifications, and more. If attackers get ahold of that data in flight, they might be able to compromise data like legitimate AD credentials and use it to poke around your network in search of valuable assets.

Encrypting LDAP traffic in flight across the network can help prevent credential theft and other malicious activity, but it's not a failsafe—and if traffic is encrypted, your own team might miss the signs of an attempted attack in progress.

While LDAP encryption isn't standard, there is a nonstandard version of LDAP called Secure LDAP, also known as "LDAPS" or "LDAP over SSL" (SSL, or Secure Socket Layer, being the now-deprecated ancestor of Transport Layer Security).

LDAPS uses its own distinct network port to connect clients and servers. The default port for LDAP is port 389, but LDAPS uses port 636 and establishes TLS/SSL upon connecting with a client.

NEW QUESTION 211

- (Exam Topic 3)

What is the least important information when you analyze a public IP address in a security alert?

- A. DNS
- B. Whois
- C. Geolocation
- D. ARP

Answer: D

NEW QUESTION 215

- (Exam Topic 3)

Which Nmap option would you use if you were not concerned about being detected and wanted to perform a very fast scan?

- A. -T5
- B. -O
- C. -T0
- D. -A

Answer: A

NEW QUESTION 220

- (Exam Topic 3)

Becky has been hired by a client from Dubai to perform a penetration test against one of their remote offices. Working from her location in Columbus, Ohio, Becky runs her usual reconnaissance scans to obtain basic information about their network. When analyzing the results of her Whois search, Becky notices that the IP was allocated to a location in Le Havre, France. Which regional Internet registry should Becky go to for detailed information?

- A. ARIN
- B. APNIC
- C. RIPE
- D. LACNIC

Answer: C

Explanation:

Regional Internet Registries (RIRs):

ARIN (American Registry for Internet Numbers) AFRINIC (African Network Information Center) APNIC (Asia Pacific Network Information Center)

RIPE (Réseaux IP Européens Network Coordination Centre)

LACNIC (Latin American and Caribbean Network Information Center)

NEW QUESTION 225

- (Exam Topic 3)

Websites and web portals that provide web services commonly use the Simple Object Access Protocol (SOAP).

Which of the following is an incorrect definition or characteristics of the protocol?

- A. Exchanges data between web services
- B. Only compatible with the application protocol HTTP
- C. Provides a structured model for messaging
- D. Based on XML

Answer: B

NEW QUESTION 227

- (Exam Topic 3)

You are a penetration tester and are about to perform a scan on a specific server. The agreement that you signed with the client contains the following specific condition for the scan: "The attacker must scan every port on the server several times using a set of spoofed sources IP addresses." Suppose that you are using Nmap to perform this scan. What flag will you use to satisfy this requirement?

- A. The -A flag
- B. The -g flag
- C. The -f flag
- D. The -D flag

Answer: D

Explanation:

flags --source-port and -g are equivalent and instruct nmap to send packets through a selected port. this option is used to try to cheat firewalls whitelisting traffic from specific ports. the following example can scan the target from the port twenty to ports eighty, 22, 21,23 and 25 sending fragmented packets to LinuxHint.

NEW QUESTION 232

- (Exam Topic 3)

Ron, a security professional, was pen testing web applications and SaaS platforms used by his company. While testing, he found a vulnerability that allows hackers to gain unauthorized access to API objects and perform actions such as view, update, and delete sensitive data of the company. What is the API vulnerability revealed in the above scenario?

- A. Code injections
- B. Improper use of CORS

- C. No ABAC validation
- D. Business logic flaws

Answer: B

NEW QUESTION 236

- (Exam Topic 3)

An Internet Service Provider (ISP) has a need to authenticate users connecting via analog modems, Digital Subscriber Lines (DSL), wireless data services, and Virtual Private Networks (VPN) over a Frame Relay network.

Which AAA protocol is the most likely able to handle this requirement?

- A. TACACS+
- B. DIAMETER
- C. Kerberos
- D. RADIUS

Answer: D

Explanation:

<https://en.wikipedia.org/wiki/RADIUS>

Remote Authentication Dial-In User Service (RADIUS) is a networking protocol that provides centralized authentication, authorization, and accounting (AAA) management for users who connect and use a network service.

RADIUS is a client/server protocol that runs in the application layer, and can use either TCP or UDP. Network access servers, which control access to a network, usually contain a RADIUS client component that communicates with the RADIUS server. RADIUS is often the back-end of choice for 802.1X authentication. A RADIUS server is usually a background process running on UNIX or Microsoft Windows.

Authentication and authorization


The user or machine sends a request to a Network Access Server (NAS) to gain access to a particular network resource using access credentials. The credentials are passed to the NAS device via the link-layer protocol—for example, Point-to-Point Protocol (PPP) in the case of many dialup or DSL providers or posted in an HTTPS secure web form.

In turn, the NAS sends a RADIUS Access Request message to the RADIUS server, requesting authorization to grant access via the RADIUS protocol.

This request includes access credentials, typically in the form of username and password or security certificate provided by the user. Additionally, the request may contain other information which the NAS knows about the user, such as its network address or phone number, and information regarding the user's physical point of attachment to the NAS.

The RADIUS server checks that the information is correct using authentication schemes such as PAP, CHAP or EAP. The user's proof of identification is verified, along with, optionally, other information related to the request, such as the user's network address or phone number, account status, and specific network service access privileges. Historically, RADIUS servers checked the user's information against a locally stored flat-file database. Modern RADIUS servers can do this or can refer to external sources—commonly SQL, Kerberos, LDAP, or Active Directory servers—to verify the user's credentials.

Shape Description automatically generated with medium confidence

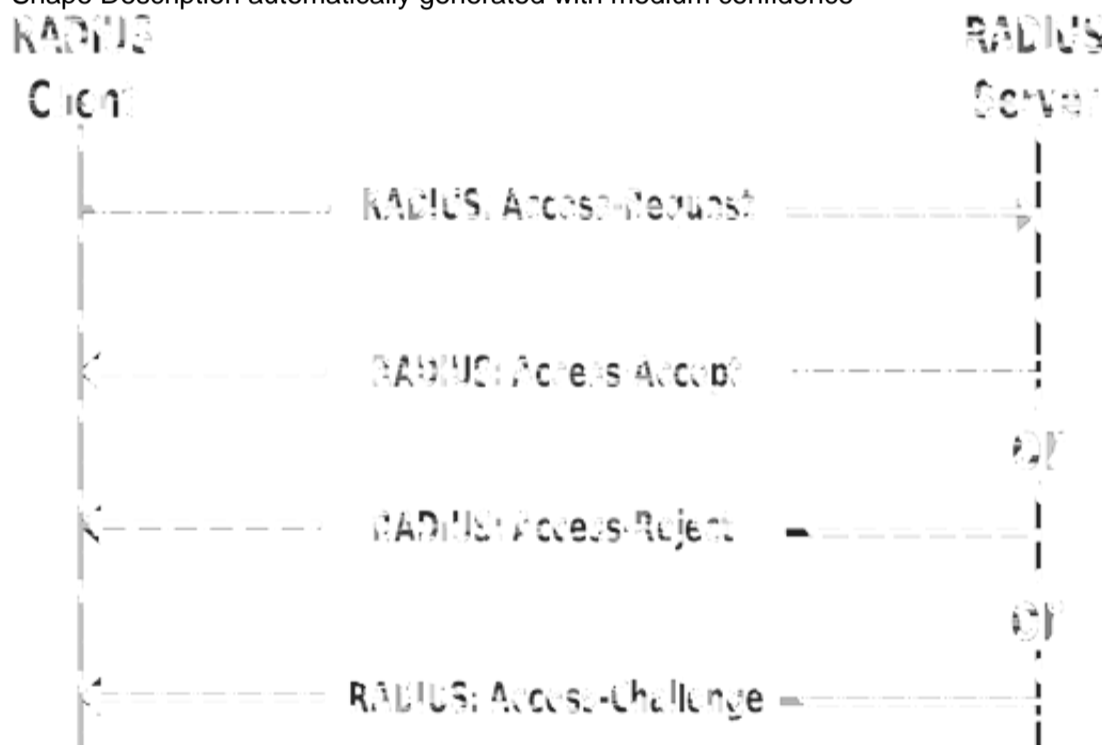

The RADIUS server then returns one of three responses to the NAS:

- 1) Access-Reject,
- 2) Access-Challenge,
- 3) Access-Accept.

Access-Reject

The user is unconditionally denied access to all requested network resources. Reasons may include failure to provide proof of identification or an unknown or inactive user account.

Access-Challenge

Requests additional information from the user such as a secondary password, PIN, token, or card.

Access-Challenge is also used in more complex authentication dialogs where a secure tunnel is established between the user machine and the Radius Server in a way that the access credentials are hidden from the NAS.

Access-Accept

The user is granted access. Once the user is authenticated, the RADIUS server will often check that the user is authorized to use the network service requested. A given user may be allowed to use a company's wireless network, but not its VPN service, for example. Again, this information may be stored locally on the RADIUS server or may be looked up in an external source such as LDAP or Active Directory.

NEW QUESTION 241

- (Exam Topic 3)

Which iOS jailbreaking technique patches the kernel during the device boot so that it becomes jailbroken after each successive reboot?

- A. Tethered jailbreaking

- B. Semi-tethered jailbreaking
- C. Untethered jailbreaking
- D. Semi-Untethered jailbreaking

Answer: C

Explanation:

An untethered jailbreak is one that allows a telephone to finish a boot cycle when being pwned with none interruption to jailbreak-oriented practicality.

Untethered jailbreaks are a unit the foremost sought-after of all, however they're additionally the foremost difficult to attain due to the powerful exploits and organic process talent they need. Associate unbound jailbreak is sent over a physical USB cable association to a laptop or directly on the device itself by approach of associate application-based exploit, like a web site in campaign.

Upon running associate unbound jailbreak, you'll be able to flip your pwned telephone off and on once more while not running the jailbreak tool once more. All of your jailbreak tweaks and apps would then continue in operation with none user intervention necessary.

It's been an extended time since iOS has gotten the unbound jailbreak treatment. The foremost recent example was the computer-based Pangu break, that supported most handsets that ran iOS nine.1. We've additionally witnessed associate unbound jailbreak within the kind of JailbreakMe, that allowed users to pwn their handsets directly from the mobile campaign applications programme while not a laptop.

NEW QUESTION 246

- (Exam Topic 3)

A security analyst uses Zenmap to perform an ICMP timestamp ping scan to acquire information related to the current time from the target host machine.

Which of the following Zenmap options must the analyst use to perform the ICMP timestamp ping scan?

- A. -PY
- B. -PU
- C. -PP
- D. -Pn

Answer: C

NEW QUESTION 249

- (Exam Topic 2)

What are common files on a web server that can be misconfigured and provide useful information for a hacker such as verbose error messages?

- A. httpd.conf
- B. administration.config
- C. idq.dll
- D. php.ini

Answer: D

Explanation:

The php.ini file may be a special file for PHP. It's where you declare changes to your PHP settings. The server is already configured with standard settings for PHP, which your site will use by default. Unless you would like to vary one or more settings, there's no got to create or modify a php.ini file. If you'd wish to make any changes to settings, please do so through the MultiPHP INI Editor.

NEW QUESTION 250

- (Exam Topic 2)

Larry, a security professional in an organization, has noticed some abnormalities in the user accounts on a web server. To thwart evolving attacks, he decided to harden the security of the web server by adopting countermeasures to secure the accounts on the web server.

Which of the following countermeasures must Larry implement to secure the user accounts on the web server?

- A. Enable unused default user accounts created during the installation of an OS
- B. Enable all non-interactive accounts that should exist but do not require interactive login
- C. Limit the administrator or root-level access to the minimum number of users
- D. Retain all unused modules and application extensions

Answer: C

NEW QUESTION 254

- (Exam Topic 2)

Alice, a professional hacker, targeted an organization's cloud services. She infiltrated the target's MSP provider by sending spear-phishing emails and distributed custom-made malware to compromise user accounts and gain remote access to the cloud service. Further, she accessed the target customer profiles with her MSP account, compressed the customer data, and stored them in the MSP. Then, she used this information to launch further attacks on the target organization.

Which of the following cloud attacks did Alice perform in the above scenario?

- A. Cloud hopper attack
- B. Cloud cryptojacking
- C. Cloudborne attack
- D. Man-in-the-cloud (MITC) attack

Answer: A

Explanation:

Operation Cloud Hopper was an in-depth attack and theft of data in 2017 directed at MSP within the UK (U.K.), US (U.S.), Japan, Canada, Brazil, France, Switzerland, Norway, Finland, Sweden, South Africa, India,

Thailand, South Korea and Australia. The group used MSP as intermediaries to accumulate assets and trade secrets from MSP client engineering, MSP industrial manufacturing, retail, energy, pharmaceuticals, telecommunications, and government agencies. Operation Cloud Hopper used over 70 variants of backdoors, malware and trojans. These were delivered through spear-phishing emails. The attacks scheduled tasks or leveraged services/utilities to continue Microsoft Windows systems albeit the PC system was rebooted. It installed malware and hacking tools to access systems and steal data.

NEW QUESTION 258

- (Exam Topic 2)

Henry is a cyber security specialist hired by BlackEye - Cyber security solutions. He was tasked with discovering the operating system (OS) of a host. He used the Unknornscan tool to discover the OS of the target system. As a result, he obtained a TTL value, which indicates that the target system is running a Windows OS. Identify the TTL value Henry obtained, which indicates that the target OS is Windows.

- A. 64
- B. 128
- C. 255
- D. 138

Answer: B

Explanation:

Windows TTL 128, Linux TTL 64, OpenBSD 255 ... <https://subinsb.com/default-device-ttl-values/> Time to Live (TTL) represents the number of 'hops' a packet can take before it is considered invalid. For Windows/Windows Phone, this value is 128. This value is 64 for Linux/Android.

NEW QUESTION 262

- (Exam Topic 2)

Gerard, a disgruntled ex-employee of Sunglass IT Solutions, targets this organization to perform sophisticated attacks and bring down its reputation in the market. To launch the attacks process, he performed DNS footprinting to gather information about DNS servers and to identify the hosts connected in the target network. He used an automated tool that can retrieve information about DNS zone data including DNS domain names, computer names, IP addresses, DNS records, and network Whois records. He further exploited this information to launch other sophisticated attacks. What is the tool employed by Gerard in the above scenario?

- A. Knative
- B. zANTI
- C. Towelroot
- D. Bluto

Answer: D

Explanation:

<https://www.darknet.org.uk/2017/07/bluto-dns-recon-zone-transfer-brute-forcer/>

"Attackers also use DNS lookup tools such as DNSdumpster.com, Bluto, and Domain Dossier to retrieve DNS records for a specified domain or hostname. These tools retrieve information such as domains and IP addresses, domain Whois records, DNS records, and network Whois records." CEH Module 02 Page 138

NEW QUESTION 267

- (Exam Topic 2)

Joe works as an IT administrator in an organization and has recently set up a cloud computing service for the organization. To implement this service, he reached out to a telecom company for providing Internet connectivity and transport services between the organization and the cloud service provider, in the NIST cloud deployment reference architecture, under which category does the telecom company fall in the above scenario?

- A. Cloud booker
- B. Cloud consumer
- C. Cloud carrier
- D. Cloud auditor

Answer: C

Explanation:

A cloud carrier acts as an intermediary that provides connectivity and transport of cloud services between cloud consumers and cloud providers.

Cloud carriers provide access to consumers through network, telecommunication and other access devices. For instance, cloud consumers will obtain cloud services through network access devices, like computers, laptops, mobile phones, mobile web devices (MIDs), etc.

The distribution of cloud services is often provided by network and telecommunication carriers or a transport agent, wherever a transport agent refers to a business organization that provides physical transport of storage media like high-capacity hard drives.

Note that a cloud provider can start SLAs with a cloud carrier to provide services consistent with the level of SLAs offered to cloud consumers, and will require the cloud carrier to provide dedicated and secure connections between cloud consumers and cloud providers.

NEW QUESTION 270

- (Exam Topic 2)

An attacker runs netcat tool to transfer a secret file between two hosts.

```
Machine A: netcat -l -p 1234 < secretfile
Machine B: netcat 192.168.3.4 > 1234
```

He is worried about information being sniffed on the network.

How would the attacker use netcat to encrypt the information before transmitting onto the wire?

- A. Machine A: netcat -l -p -s password 1234 < testfile Machine B: netcat <machine A IP> 1234
- B. Machine A: netcat -l -e magickey -p 1234 < testfile Machine B: netcat <machine A IP> 1234
- C. Machine A: netcat -l -p 1234 < testfile -pw password Machine B: netcat <machine A IP> 1234 -pw password
- D. Use cryptcat instead of netcat

Answer: D

NEW QUESTION 273

- (Exam Topic 2)

Jane invites her friends Alice and John over for a LAN party. Alice and John access Jane's wireless network without a password. However, Jane has a long,

complex password on her router. What attack has likely occurred?

- A. Wireless sniffing
- B. Piggybacking
- C. Evil twin
- D. Wardriving

Answer: C

Explanation:

An evil twin may be a fraudulent Wi-Fi access point that appears to be legitimate but is about up to pay attention to wireless communications.[1] The evil twin is that the wireless LAN equivalent of the phishing scam. This type of attack could also be used to steal the passwords of unsuspecting users, either by monitoring their connections or by phishing, which involves fixing a fraudulent internet site and luring people there. The attacker snoops on Internet traffic employing a bogus wireless access point. Unwitting web users could also be invited to log into the attacker's server, prompting them to enter sensitive information like usernames and passwords. Often, users are unaware they need been duped until well after the incident has occurred. When users log into unsecured (non-HTTPS) bank or e-mail accounts, the attacker intercepts the transaction, since it's sent through their equipment. The attacker is additionally ready to hook up with other networks related to the users' credentials. Fake access points are found out by configuring a wireless card to act as an access point (known as HostAP). They're hard to trace since they will be shut off instantly. The counterfeit access point could also be given an equivalent SSID and BSSID as a close-by Wi-Fi network. The evil twin are often configured to pass Internet traffic through to the legitimate access point while monitoring the victim's connection, or it can simply say the system is temporarily unavailable after obtaining a username and password.

NEW QUESTION 275

- (Exam Topic 2)

You receive an e-mail like the one shown below. When you click on the link contained in the mail, you are redirected to a website seeking you to download free Anti-Virus software.

Dear valued customers,

We are pleased to announce the newest version of Antivirus 2010 for Windows which will probe you with total security against the latest spyware, malware, viruses, Trojans and other online threats. Simply visit the link below and enter your antivirus code:

Antivirus code: 5014

<http://www.juggyboy/virus/virus.html>

Thank you for choosing us, the worldwide leader Antivirus solutions.

Mike Robertson

PDF Reader Support

Copyright Antivirus 2010 ?All rights reserved

If you want to stop receiving mail, please go to:

<http://www.juggyboy.com>

or you may contact us at the following address: Media Internet Consultants, Edif. Neptuno, Planta

Baja, Ave. Ricardo J. Alfaro, Tumba Muerto, n/a Panama

How will you determine if this is Real Anti-Virus or Fake Anti-Virus website?

- A. Look at the website design, if it looks professional then it is a Real Anti-Virus website
- B. Connect to the site using SSL, if you are successful then the website is genuine
- C. Search using the URL and Anti-Virus product name into Google and lookout for suspicious warnings against this site
- D. Download and install Anti-Virus software from this suspicious looking site, your Windows 7 will prompt you and stop the installation if the downloaded file is a malware
- E. Download and install Anti-Virus software from this suspicious looking site, your Windows 7 will prompt you and stop the installation if the downloaded file is a malware

Answer: C

NEW QUESTION 276

- (Exam Topic 2)

Fred is the network administrator for his company. Fred is testing an internal switch.

From an external IP address, Fred wants to try and trick this switch into thinking it already has established a session with his computer. How can Fred accomplish this?

- A. Fred can accomplish this by sending an IP packet with the RST/SIN bit and the source address of his computer.
- B. He can send an IP packet with the SYN bit and the source address of his computer.
- C. Fred can send an IP packet with the ACK bit set to zero and the source address of the switch.
- D. Fred can send an IP packet to the switch with the ACK bit and the source address of his machine.

Answer: D

NEW QUESTION 277

- (Exam Topic 2)

Harry, a professional hacker, targets the IT infrastructure of an organization. After preparing for the attack, he attempts to enter the target network using techniques such as sending spear-phishing emails and exploiting vulnerabilities on publicly available servers. Using these techniques, he successfully deployed malware on the target system to establish an outbound connection. What is the APT lifecycle phase that Harry is currently executing?

- A. Preparation
- B. Cleanup
- C. Persistence
- D. initial intrusion

Answer: D

Explanation:

After the attacker completes preparations, subsequent step is an effort to realize an edge within the target's environment. a particularly common entry tactic is that the use of spearphishing emails containing an internet link or attachment. Email links usually cause sites where the target's browser and related software are

subjected to varied exploit techniques or where the APT actors plan to social engineer information from the victim which will be used later. If a successful exploit takes place, it installs an initial malware payload on the victim's computer. Figure 2 illustrates an example of a spearphishing email that contains an attachment. Attachments are usually executable malware, a zipper or other archive containing malware, or a malicious Office or Adobe PDF (Portable Document Format) document that exploits vulnerabilities within the victim's applications to ultimately execute malware on the victim's computer. Once the user has opened a malicious file using vulnerable software, malware is executing on the target system. These phishing emails are often very convincing and difficult to differentiate from legitimate email messages. Tactics to extend their believability include modifying legitimate documents from or associated with the organization. Documents are sometimes stolen from the organization or their collaborators during previous exploitation operations. Actors modify the documents by adding exploits and malicious code then send them to the victims. Phishing emails are commonly sent through previously compromised email servers, email accounts at organizations associated with the target or public email services. Emails also can be sent through mail relays with modified email headers to form the messages appear to possess originated from legitimate sources. Exploitation of vulnerabilities on public-facing servers is another favorite technique of some APT groups. Though this will be accomplished using exploits for known vulnerabilities, 0-days are often developed or purchased to be used in intrusions as required .

Gaining an edge within the target environment is that the primary goal of the initial intrusion. Once a system is exploited, the attacker usually places malware on the compromised system and uses it as a jump point or proxy for further actions. Malware placed during the initial intrusion phase is usually an easy downloader, basic

Remote Access Trojan or an easy shell. Figure 3 illustrates a newly infected system initiating an outbound connection to notify the APT actor that the initial intrusion attempt was successful which it's able to accept commands.



Figure 2. APT actor sends spearphishing email to target with malicious content

NEW QUESTION 282

- (Exam Topic 2)

What type of analysis is performed when an attacker has partial knowledge of inner-workings of the application?

- A. Black-box
- B. Announced
- C. White-box
- D. Grey-box

Answer: D

NEW QUESTION 284

- (Exam Topic 2)

Which of the following are well known password-cracking programs?

- A. L0phtcrack
- B. NetCat
- C. Jack the Ripper
- D. Netbus
- E. John the Ripper

Answer: AE

NEW QUESTION 288

- (Exam Topic 2)

You are tasked to configure the DHCP server to lease the last 100 usable IP addresses in subnet to. 1.4.0/23. Which of the following IP addresses could be teased as a result of the new configuration?

- A. 210.1.55.200
- B. 10.1.4.254
- C. 10.1.5.200
- D. 10.1.4.156

Answer: C

NEW QUESTION 293

- (Exam Topic 2)

When a security analyst prepares for the formal security assessment - what of the following should be done in order to determine inconsistencies in the secure assets database and verify that system is compliant to the minimum security baseline?

- A. Data items and vulnerability scanning
- B. Interviewing employees and network engineers
- C. Reviewing the firewalls configuration
- D. Source code review

Answer: A

NEW QUESTION 298

- (Exam Topic 2)

Which of the following is the primary objective of a rootkit?

- A. It opens a port to provide an unauthorized service
- B. It creates a buffer overflow
- C. It replaces legitimate programs
- D. It provides an undocumented opening in a program

Answer: C

NEW QUESTION 303

- (Exam Topic 2)

In the field of cryptanalysis, what is meant by a "rubber-hose" attack?

- A. Attempting to decrypt cipher text by making logical assumptions about the contents of the original plain text.
- B. Extraction of cryptographic secrets through coercion or torture.
- C. Forcing the targeted key stream through a hardware-accelerated device such as an ASIC.
- D. A backdoor placed into a cryptographic algorithm by its creator.

Answer: B

NEW QUESTION 306

- (Exam Topic 2)

OpenSSL on Linux servers includes a command line tool for testing TLS. What is the name of the tool and the correct syntax to connect to a web server?

- A. openssl s_client -site www.website.com:443
- B. openssl_client -site www.website.com:443
- C. openssl s_client -connect www.website.com:443
- D. openssl_client -connect www.website.com:443

Answer: C

NEW QUESTION 311

- (Exam Topic 2)

Johnson, an attacker, performed online research for the contact details of reputed cybersecurity firms. He found the contact number of sibertech.org and dialed the number, claiming himself to represent a technical support team from a vendor. He warned that a specific server is about to be compromised and requested sibertech.org to follow the provided instructions. Consequently, he prompted the victim to execute unusual commands and install malicious files, which were then used to collect and pass critical information to Johnson's machine. What is the social engineering technique Steve employed in the above scenario?

- A. Quid pro quo
- B. Diversion theft
- C. Elicitation
- D. Phishing

Answer: A

Explanation:

<https://www.eccouncil.org/what-is-social-engineering/>

This Social Engineering scam involves an exchange of information that can benefit both the victim and the trickster. Scammers would make the prey believe that a fair exchange will be present between both sides, but in reality, only the fraudster stands to benefit, leaving the victim hanging on to nothing. An example of a Quid Pro Quo is a scammer pretending to be an IT support technician. The con artist asks for the login credentials of the company's computer saying that the company is going to receive technical support in return. Once the victim has provided the credentials, the scammer now has control over the company's computer and may possibly load malware or steal personal information that can be a motive to commit identity theft.

"A quid pro quo attack (aka something for something) attack) is a variant of baiting. Instead of baiting a target with the promise of a good, a quid pro quo attack promises a service or a benefit based on the execution of a specific action."

<https://resources.infosecinstitute.com/topic/common-social-engineering-attacks/#:~:text=A%20quid%20pro%20>

NEW QUESTION 314

- (Exam Topic 2)

Study the snort rule given below and interpret the rule. alert tcp any any --> 192.168.1.0/24 111 (content:"|00 01 86 a5|"; msG. "mountd access");

- A. An alert is generated when a TCP packet is generated from any IP on the 192.168.1.0 subnet and destined to any IP on port 111
- B. An alert is generated when any packet other than a TCP packet is seen on the network and destined for the 192.168.1.0 subnet
- C. An alert is generated when a TCP packet is originated from port 111 of any IP address to the 192.168.1.0 subnet
- D. An alert is generated when a TCP packet originating from any IP address is seen on the network and destined for any IP address on the 192.168.1.0 subnet on port 111

Answer: D

NEW QUESTION 318

- (Exam Topic 2)

John, a professional hacker, targeted an organization that uses LDAP for accessing distributed directory services. He used an automated tool to anonymously query the IDAP service for sensitive information such as usernames, addresses, departmental details, and server names to launch further attacks on the target organization.

What is the tool employed by John to gather information from the IDAP service?

- A. jxplorer
- B. Zabasearch
- C. EarthExplorer

D. Ike-scan

Answer: A

Explanation:

JXplorer could be a cross platform LDAP browser and editor. it's a standards compliant general purpose LDAP client which will be used to search, scan and edit any commonplace LDAP directory, or any directory service with an LDAP or DSML interface.

It is extremely flexible and can be extended and custom in a very number of the way. JXplorer is written in java, and also the source code and source code build system are obtainable via svn or as a packaged build for users who wish to experiment or any develop the program.

JX is available in 2 versions; the free open source version under an OSI Apache two style licence, or within the JXWorkBench Enterprise bundle with inbuilt reporting, administrative and security tools.

JX has been through a number of different versions since its creation in 1999; the foremost recent stable release is version 3.3.1, the August 2013 release.

JXplorer could be a absolutely useful LDAP consumer with advanced security integration and support for the harder and obscure elements of the LDAP protocol. it's been tested on Windows, Solaris, linux and OSX, packages are obtainable for HP-UX, AIX, BSD and it should run on any java supporting OS.

NEW QUESTION 319

- (Exam Topic 2)

Which file is a rich target to discover the structure of a website during web-server footprinting?

- A. Document root
- B. Robots.txt
- C. domain.txt
- D. index.html

Answer: B

NEW QUESTION 322

- (Exam Topic 2)

While testing a web application in development, you notice that the web server does not properly ignore the "dot dot slash" (../) character string and instead returns the file listing of a folder structure of the server.

What kind of attack is possible in this scenario?

- A. Cross-site scripting
- B. Denial of service
- C. SQL injection
- D. Directory traversal

Answer: D

Explanation:

Appropriately controlling admittance to web content is significant for running a safe web worker. Index crossing or Path Traversal is a HTTP assault which permits aggressors to get to limited catalogs and execute orders outside of the web worker's root registry.

Web workers give two primary degrees of security instruments

- Access Control Lists (ACLs)
- Root index

An Access Control List is utilized in the approval cycle. It is a rundown which the web worker's manager uses to show which clients or gatherings can get to, change or execute specific records on the worker, just as other access rights.

The root registry is a particular index on the worker record framework in which the clients are kept. Clients can't get to anything over this root.

For instance: the default root registry of IIS on Windows is C:\inetpub\wwwroot and with this arrangement, a client doesn't approach C:\Windows yet approaches C:\inetpub\wwwroot\news and some other indexes and documents under the root catalog (given that the client is confirmed by means of the ACLs).

The root index keeps clients from getting to any documents on the worker, for example, C:\WINDOWS\system32\win.ini on Windows stages and the/and so on/passwd record on Linux/UNIX stages.

This weakness can exist either in the web worker programming itself or in the web application code.

To play out a registry crossing assault, all an assailant requires is an internet browser and some information on where to aimlessly discover any default documents and registries on the framework.

What an assailant can do if your site is defenseless With a framework defenseless against index crossing, an aggressor can utilize this weakness to venture out of the root catalog and access different pieces of the record framework. This may enable the assailant to see confined documents, which could give the aggressor more data needed to additional trade off the framework.

Contingent upon how the site access is set up, the aggressor will execute orders by mimicking himself as the client which is related with "the site". Along these lines everything relies upon what the site client has been offered admittance to in the framework.

Illustration of a Directory Traversal assault by means of web application code In web applications with dynamic pages, input is generally gotten from programs through GET or POST solicitation techniques. Here is an illustration of a HTTP GET demand URL

GET

<http://test.webarticles.com/show.asp?view=oldarchive.html> HTTP/1.1 Host: test.webarticles.com

With this URL, the browser requests the dynamic page show.asp from the server and with it also sends the parameter view with the value of oldarchive.html. When this request is executed on the web

server, show.asp retrieves the file oldarchive.html from the server's file system, renders it and then sends back to the browser which displays it to the user. The attacker would assume that show.asp can retrieve files from the file system and sends the following custom URL.

GET

<http://test.webarticles.com/show.asp?view=../../../../Windows/system.ini> HTTP/1.1 Host: test.webarticles.com

This will cause the dynamic page to retrieve the file system.ini from the file system and display it to the user The expression ../ instructs the system to go one directory up which is commonly used as an operating system directive. The attacker has to guess how many directories he has to go up to find the Windows folder on the system, but this is easily done by trial and error.

Example of a Directory Traversal attack via web server Apart from vulnerabilities in the code, even the web server itself can be open to directory traversal attacks. The problem can either be incorporated into the web server software or inside some sample script files left available on the server.

The vulnerability has been fixed in the latest versions of web server software, but there are web servers online which are still using older versions of IIS and Apache which might be open to directory traversal attacks. Even though you might be using a web server software version that has fixed this vulnerability, you might still have some sensitive default script directories exposed which are well known to hackers.

For example, a URL request which makes use of the scripts directory of IIS to traverse directories and execute a command can be

GET

http://server.com/scripts/..%5c../Windows/System32/cmd.exe?/c+dir+c:\ HTTP/1.1 Host: server.com

The request would return to the user a list of all files in the C:\ directory by executing the cmd.exe comm shell file and run the command dir c:\ in the shell. The %5c expression that is in the URL request is a we server escape code which is used to represent normal characters. In this case %5c represents the character \. Newer versions of modern web server software check for these escape codes and do not let them through. Some older versions however, do not filter out these codes in the root directory enforcer and will let the attackers execute such commands.

NEW QUESTION 326

- (Exam Topic 2)

Ricardo has discovered the username for an application in his targets environment. As he has a limited amount of time, he decides to attempt to use a list of common passwords he found on the Internet. He compiles them into a list and then feeds that list as an argument into his password-cracking application, what type of attack is Ricardo performing?

- A. Known plaintext
- B. Password spraying
- C. Brute force
- D. Dictionary

Answer: D

Explanation:

A dictionary Attack as an attack vector utilized by the attacker to break in a very system, that is password protected, by golf shot technically each word in a very dictionary as a variety of password for that system. This attack vector could be a variety of Brute Force Attack.

The lexicon will contain words from an English dictionary and conjointly some leaked list of commonly used passwords and once combined with common character substitution with numbers, will generally be terribly effective and quick.

How is it done?

Basically, it's attempting each single word that's already ready. it's done victimization machine-controlled tools that strive all the possible words within the dictionary.

Some password Cracking Software:

- John the ripper
- L0phtCrack
- Aircrack-ng

NEW QUESTION 331

- (Exam Topic 2)

Which command can be used to show the current TCP/IP connections?

- A. Netsh
- B. Netstat
- C. Net use connection
- D. Net use

Answer: A

NEW QUESTION 334

- (Exam Topic 2)

In this attack, a victim receives an e-mail claiming from PayPal stating that their account has been disabled and confirmation is required before activation. The attackers then scam to collect not one but two credit card numbers, ATM PIN number and other personal details. Ignorant users usually fall prey to this scam. Which of the following statement is incorrect related to this attack?

- A. Do not reply to email messages or popup ads asking for personal or financial information
- B. Do not trust telephone numbers in e-mails or popup ads
- C. Review credit card and bank account statements regularly
- D. Antivirus, anti-spyware, and firewall software can very easily detect these type of attacks
- E. Do not send credit card numbers, and personal or financial information via e-mail

Answer: D

NEW QUESTION 337

- (Exam Topic 2)

There have been concerns in your network that the wireless network component is not sufficiently secure. You perform a vulnerability scan of the wireless network and find that it is using an old encryption protocol that was designed to mimic wired encryption, what encryption protocol is being used?

- A. WEP
- B. RADIUS
- C. WPA
- D. WPA3

Answer: A

Explanation:

Wired Equivalent Privacy (WEP) may be a security protocol, laid out in the IEEE wireless local area network (Wi-Fi) standard, 802.11b, that's designed to supply a wireless local area network (WLAN) with A level of security and privacy like what's usually expected of a wired LAN. A wired local area network (LAN) is usually protected by physical security mechanisms (controlled access to a building, for example) that are effective for a controlled physical environment, but could also be ineffective for WLANs because radio waves aren't necessarily bound by the walls containing the network. WEP seeks to determine similar protection thereto offered by the wired network's physical security measures by encrypting data transmitted over the WLAN. encoding protects the vulnerable wireless link between clients and access points; once this measure has been taken, other typical LAN security mechanisms like password protection, end-to-end encryption, virtual private networks (VPNs), and authentication are often put in situ to make sure privacy. A research group from the University of California at Berkeley recently published a report citing "major security flaws" in WEP that left WLANs using the protocol susceptible to attacks (called wireless equivalent privacy attacks). within

the course of the group's examination of the technology, they were ready to intercept and modify transmissions and gain access to restricted networks. The Wireless Ethernet Compatibility Alliance (WECA) claims that WEP – which is included in many networking products – was never intended to be the only security mechanism for a WLAN, and that, in conjunction with traditional security practices, it's very effective.

NEW QUESTION 338

- (Exam Topic 2)

Daniel is a professional hacker who is attempting to perform an SQL injection attack on a target website. www.movlescope.com. During this process, he encountered an IDS that detects SQL Injection attempts based on predefined signatures. To evade any comparison statement, he attempted placing characters such as "or '1'='1'" in any basic injection statement such as "or 1=1." Identify the evasion technique used by Daniel in the above scenario.

- A. Null byte
- B. IP fragmentation
- C. Char encoding
- D. Variation

Answer: D

Explanation:

One may append the comment “—” operator along with the String for the username and whole avoid executing the password segment of the SQL query. Everything when the — operator would be considered as comment and not dead.

To launch such an attack, the value passed for name could be 'OR '1'='1' ; —Statement = “SELECT * FROM 'CustomerDB' WHERE 'name' = ' ”+ userName + “ ‘ AND 'password' = ' ” + passwd + “ ‘ ; ”

Statement = “SELECT * FROM 'CustomerDB' WHERE 'name' = ' ' OR '1'='1';— + “ ‘ AND 'password' = ' ” + passwd + “ ‘ ; ”

All the records from the customer database would be listed.

Yet, another variation of the SQL Injection Attack can be conducted in dbms systems that allow multiple SQL injection statements. Here, we will also create use of the vulnerability in some dbms whereby a user provided field isn't strongly used in or isn't checked for sort constraints.

This could take place once a numeric field is to be employed in a SQL statement; but, the programmer makes no checks to validate that the user supplied input is numeric.

Variation is an evasion technique whereby the attacker can easily evade any comparison statement. The attacker does this by placing characters such as "" or '1'='1'" in any basic injection statement such as “or 1=1” or with other accepted SQL comments.

Evasion Technique: Variation Variation is an evasion technique whereby the attacker can easily evade any comparison statement. The attacker does this by placing characters such as "" or '1'='1'" in any basic injection statement such as “or 1=1” or with other accepted SQL comments. The SQL interprets this as a comparison between two strings or characters instead of two numeric values. As the evaluation of two strings yields a true statement, similarly, the evaluation of two numeric values yields a true statement, thus rendering the evaluation of the complete query unaffected. It is also possible to write many other signatures; thus, there are infinite possibilities of variation as well. The main aim of the attacker is to have a WHERE statement that is always evaluated as “true” so that any mathematical or string comparison can be used, where the SQL can perform the same.

NEW QUESTION 339

- (Exam Topic 2)

Bob is going to perform an active session hijack against Brownies Inc. He has found a target that allows session oriented connections (Telnet) and performs the sequence prediction on the target operating system. He manages to find an active session due to the high level of traffic on the network. What is Bob supposed to do next?

- A. Take over the session
- B. Reverse sequence prediction
- C. Guess the sequence numbers
- D. Take one of the parties offline

Answer: C

NEW QUESTION 342

- (Exam Topic 2)

Techno Security Inc. recently hired John as a penetration tester. He was tasked with identifying open ports in the target network and determining whether the ports are online and any firewall rule sets are encountered. John decided to perform a TCP SYN ping scan on the target network. Which of the following Nmap commands must John use to perform the TCP SYN ping scan?

- A. `nmap -sn -pp < target ip address >`
- B. `nmap -sn -PO < target IP address >`
- C. `nmap -sn -PS < target IP address >`
- D. `nmap -sn -PA < target IP address >`

Answer: C

Explanation:

<https://hub.packtpub.com/discovering-network-hosts-with-tcp-syn-and-tcp-ack-ping-scans-in-nmaptutorial/>

NEW QUESTION 347

- (Exam Topic 2)

Nathan is testing some of his network devices. Nathan is using Macof to try and flood the ARP cache of these switches. If these switches' ARP cache is successfully flooded, what will be the result?

- A. The switches will drop into hub mode if the ARP cache is successfully flooded.
- B. If the ARP cache is flooded, the switches will drop into pix mode making it less susceptible to attacks.
- C. Depending on the switch manufacturer, the device will either delete every entry in its ARP cache or reroute packets to the nearest switch.
- D. The switches will route all traffic to the broadcast address created collisions.

Answer: A

NEW QUESTION 349

- (Exam Topic 2)

Susan, a software developer, wants her web API to update other applications with the latest information. For this purpose, she uses a user-defined HTTP tailback or push APIs that are raised based on trigger events: when invoked, this feature supplies data to other applications so that users can instantly receive real-time Information.

Which of the following techniques is employed by Susan?

- A. web shells
- B. Webhooks
- C. REST API
- D. SOAP API

Answer: B

Explanation:

Webhooks are one of a few ways internet applications will communicate with one another.

It allows you to send real-time data from one application to another whenever a given event happens.

For example, let's say you've created an application using the Foursquare API that tracks when people check into your restaurant. You ideally wish to be able to greet customers by name and provide a complimentary drink when they check in.

What a webhook will is notify you any time someone checks in, therefore you'd be able to run any processes that you simply had in your application once this event is triggered.

The data is then sent over the web from the application wherever the event originally occurred, to the receiving application that handles the data.

Here's a visual representation of what that looks like:



A webhook url is provided by the receiving application, and acts as a phone number that the other application will call once an event happens.

Only it's more complicated than a phone number, because data about the event is shipped to the webhook url in either JSON or XML format. this is known as the "payload."

Here's an example of what a webhook url looks like with the payload it's carrying:

```
https://yourapp.com/data/12345?customer=Bob&value=38.99&item=paper
To: yourapp.com/data/12345
Customer: Bob
Value: 38.99
Item: Paper
```

What are Webhooks? Webhooks are user-defined HTTP callback or push APIs that are raised based on events triggered, such as comment received on a post and pushing code to the registry. A webhook allows an application to update other applications with the latest information. Once invoked, it supplies data to the other applications, which means that users instantly receive real-time information. Webhooks are sometimes called "Reverse APIs" as they provide what is required for API specification, and the developer should create an API to use a webhook. A webhook is an API concept that is also used to send text messages and notifications to mobile numbers or email addresses from an application when a specific event is triggered. For instance, if you search for something in the online store and the required item is out of stock, you click on the "Notify me" bar to get an alert from the application when that item is available for purchase. These notifications from the applications are usually sent through webhooks.

NEW QUESTION 354

- (Exam Topic 2)

You are analysing traffic on the network with Wireshark. You want to routinely run a cron job which will run the capture against a specific set of IPs - 192.168.8.0/24. What command you would use?

- A. wireshark --fetch "192.168.8"
- B. wireshark --capture --local masked 192.168.8.0 ---range 24
- C. tshark -net 192.255.255.255 mask 192.168.8.0
- D. sudo tshark -f"net 192 .68.8.0/24"

Answer: D

NEW QUESTION 358

- (Exam Topic 2)

What is the common name for a vulnerability disclosure program opened by companies In platforms such as HackerOne?

- A. Vulnerability hunting program
- B. Bug bounty program
- C. White-hat hacking program
- D. Ethical hacking program

Answer: B

Explanation:

Bug bounty programs allow independent security researchers to report bugs to an companies and receive rewards or compensation. These bugs area unit sometimes security exploits and vulnerabilities, although they will additionally embody method problems, hardware flaws, and so on.

The reports area unit usually created through a program travel by associate degree freelance third party (like Bugcrowd or HackerOne). The companies can got wind of (and run) a program curated to the organization's wants.

Programs is also non-public (invite-only) wherever reports area unit unbroken confidential to the organization or public (where anyone will sign in and join). they will happen over a collection timeframe or with without stopping date (though the second possibility is a lot of common).

Who uses bug bounty programs?Many major organizations use bug bounties as an area of their security program, together with AOL, Android, Apple, Digital Ocean, and goldman Sachs. you'll read an inventory of all the programs offered by major bug bounty suppliers, Bugcrowd and HackerOne, at these links.

Why do corporations use bug bounty programs? Bug bounty programs provide corporations the flexibility to harness an outsized cluster of hackers so as to seek out bugs in their code.

This gives them access to a bigger variety of hackers or testers than they'd be able to access on a one-on-one basis. It {can also|also will|can even|may also|may} increase the probabilities that bugs are unit found and reported to them before malicious hackers can exploit them.

It may also be an honest publicity alternative for a firm. As bug bounties became a lot of common, having a bug bounty program will signal to the general public and even regulators that a corporation incorporates a mature security program.

This trend is likely to continue, as some have began to see bug bounty programs as an business normal that all companies ought to invest in.

Why do researchers and hackers participate in bug bounty programs? Finding and news bugs via a bug bounty program may end up in each money bonuses and recognition. In some cases, it will be a good thanks to show real-world expertise once you are looking for employment, or will even facilitate introduce you to parents on the protection team within an companies.

This can be full time income for a few of us, income to supplement employment, or the way to point out off your skills and find a full time job.

It may also be fun! it is a nice (legal) probability to check out your skills against huge companies and government agencies.

What area unit the disadvantages of a bug bounty program for independent researchers and hackers? A lot of hackers participate in these varieties of programs, and it will be tough to form a major quantity of cash on the platform.

In order to say the reward, the hacker has to be the primary person to submit the bug to the program. meaning that in apply, you may pay weeks searching for a bug to use, solely to be the person to report it and build no cash.

Roughly ninety seven of participants on major bug bounty platforms haven't sold-out a bug.

In fact, a 2019 report from HackerOne confirmed that out of quite three hundred,000 registered users, solely around two.5% received a bounty in their time on the platform.

Essentially, most hackers are not creating a lot of cash on these platforms, and really few square measure creating enough to switch a full time wage (plus they do not have advantages like vacation days, insurance, and retirement planning).

What square measure the disadvantages of bug bounty programs for organizations? These programs square measure solely helpful if the program ends up in the companies realizing issues that they weren't able to find themselves (and if they'll fix those problems)!

If the companies is not mature enough to be able to quickly rectify known problems, a bug bounty program is not the right alternative for his or her companies.

Also, any bug bounty program is probably going to draw in an outsized range of submissions, several of which can not be high-quality submissions. a corporation must be ready to cope with the exaggerated volume of alerts, and also the risk of a coffee signal to noise magnitude relation (essentially that it's probably that they're going to receive quite few unhelpful reports for each useful report).

Additionally, if the program does not attract enough participants (or participants with the incorrect talent set, and so participants are not able to establish any bugs), the program is not useful for the companies.

The overwhelming majority of bug bounty participants consider web site vulnerabilities (72%, per HackerOn), whereas solely a number of (3.5%) value more highly to seek for package vulnerabilities.

This is probably because of the actual fact that hacking in operation systems (like network hardware and memory) needs a big quantity of extremely specialised experience. this implies that firms may even see vital come on investment for bug bounties on websites, and not for alternative applications, notably those that need specialised experience.

This conjointly implies that organizations which require to look at AN application or web site among a selected time-frame may not need to rely on a bug bounty as there is no guarantee of once or if they receive reports.

Finally, it are often probably risky to permit freelance researchers to try to penetrate your network. this could end in public speech act of bugs, inflicting name harm within the limelight (which could end in individuals not eager to purchase the organizations' product or service), or speech act of bugs to additional malicious third parties, United Nations agency may use this data to focus on the organization.

NEW QUESTION 359

- (Exam Topic 2)

infecting a system with malware and using phishing to gain credentials to a system or web application are examples of which phase of the ethical hacking methodology?

- A. Reconnaissance
- B. Maintaining access
- C. Scanning
- D. Gaining access

Answer: D

Explanation:

This phase having the hacker uses different techniques and tools to realize maximum data from the system.

they're → Password cracking – Methods like Bruteforce, dictionary attack, rule-based attack, rainbow table a used. Bruteforce is trying all combinations of the password. Dictionary attack is trying an inventory of meaningful words until the password matches. Rainbow table takes the hash value of the password and compares with pre-computed hash values until a match is discovered.

• Password attacks – Passive attacks like wire sniffing, replay attack. Active online attack like Trojans, keyloggers, hash injection, phishing. Offline attacks like pre-computed hash, distributed network and rainbow. Non electronic attack like shoulder surfing, social engineering and dumpster diving.

NEW QUESTION 364

- (Exam Topic 2)

Sam is working as a system administrator In an organization. He captured the principal characteristics of a vulnerability and produced a numerical score to reflect Its severity using CVSS v3.0 to property assess and prioritize the organization's vulnerability management processes. The base score that Sam obtained after performing cvss rating was 4.0. What is the CVSS severity level of the vulnerability discovered by Sam in the above scenario?

- A. Medium
- B. Low
- C. Critical
- D. High

Answer: A

Explanation:

Rating CVSS Score None 0.0

Low 0.1 - 3.9

Medium 4.0 - 6.9

High 7.0 - 8.9

Critical 9.0 - 10.0

<https://www.first.org/cvss/v3.0/specification-document>

The Common Vulnerability Scoring System (CVSS) is an open framework for communicating the characteristics and severity of software vulnerabilities. CVSS

consists of three metric groups: Base, Temporal, and Environmental. The Base metrics produce a score ranging from 0 to 10, which can then be modified by scoring the Temporal and Environmental metrics. A CVSS score is also represented as a vector string, a compressed textual representation of the values used to derive the score. Thus, CVSS is well suited as a standard measurement system for industries, organizations, and governments that need accurate and consistent vulnerability severity scores. Two common uses of CVSS are calculating the severity of vulnerabilities discovered on one's systems and as a factor in prioritization of vulnerability remediation activities. The National Vulnerability Database (NVD) provides CVSS scores for almost all known vulnerabilities.

Qualitative Severity Rating Scale

For some purposes, it is useful to have a textual representation of the numeric Base, Temporal and Environmental scores.

Table Description automatically generated

Rating	CVSS Score
None	0.0
Low	0.1 - 3.9
Medium	4.0 - 6.9
High	7.0 - 8.9
Critical	9.0 - 10.0

NEW QUESTION 369

- (Exam Topic 2)

An LDAP directory can be used to store information similar to a SQL database. LDAP uses a database structure instead of SQL's structure. Because of this, LDAP has difficulty representing many-to-one relationships.

- A. Relational, Hierarchical
- B. Strict, Abstract
- C. Hierarchical, Relational
- D. Simple, Complex

Answer: C

NEW QUESTION 373

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

312-50v12 Practice Exam Features:

- * 312-50v12 Questions and Answers Updated Frequently
- * 312-50v12 Practice Questions Verified by Expert Senior Certified Staff
- * 312-50v12 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 312-50v12 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 312-50v12 Practice Test Here](#)