



Cisco

Exam Questions 300-735

Automating and Programming Cisco Security Solutions (SAUTO)

NEW QUESTION 1

Which description of synchronous calls to an API is true?

- A. They can be used only within single-threaded processes.
- B. They pause execution and wait for the response.
- C. They always successfully return within a fixed time.
- D. They can be used only for small requests.

Answer: B

NEW QUESTION 2

```
import requests

headers = {
    'Authorization': 'Bearer ' + investigate_api_key
}

domains=["cisco.com", "google.com", "xreddfr.df"]

investigate_url= "https://investigate.api.umbrella.com/domains/categorization/"
values = str(json.dumps(domains))
response = requests.post(investigate_url, data=values, headers=headers)
```

Refer to the exhibit.

What does the response from the API contain when this code is executed?

- A. error message and status code of 403
- B. newly created domains in Cisco Umbrella Investigate
- C. updated domains in Cisco Umbrella Investigate
- D. status and security details for the domains

Answer: D

NEW QUESTION 3

Refer to the exhibit. A network operator must generate a daily flow report and learn how to act on or manipulate returned data. When the operator runs the script, it returns an enormous amount of information. Which two actions enable the operator to limit returned data? (Choose two.)

- A. Add recordLimit
- B. followed by an integer (key:value) to the flow_data.
- C. Add a for loop at the end of the script, and print each key value pair separately.
- D. Add flowLimit, followed by an integer (key:value) to the flow_data.
- E. Change the startDateTime and endDateTime values to include smaller time intervals.
- F. Change the startDate and endDate values to include smaller date intervals.

Answer: AB

NEW QUESTION 4

What are two advantages of Python virtual environments? (Choose two.)

- A. Virtual environments can move compiled modules between different platforms.
- B. Virtual environments permit non-administrative users to install packages.
- C. The application code is run in an environment that is destroyed upon exit.
- D. Virtual environments allow for stateful high availability.
- E. Virtual environments prevent packaging conflicts between multiple Python projects.

Answer: CE

NEW QUESTION 5

DRAG DROP

Drag and drop the items to complete the ThreatGRID API call to return a curated feed of sinkholed-ip-dns in stix format. Not all options are used.
 Select and Place:


	https://panacea.threatgrid.com/api/v3/
	/ ?api_key=[API_KEY]

PUT	sinkholed-ip-dns
feeds	search
sinkholed-ip-dns.stix	GET

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

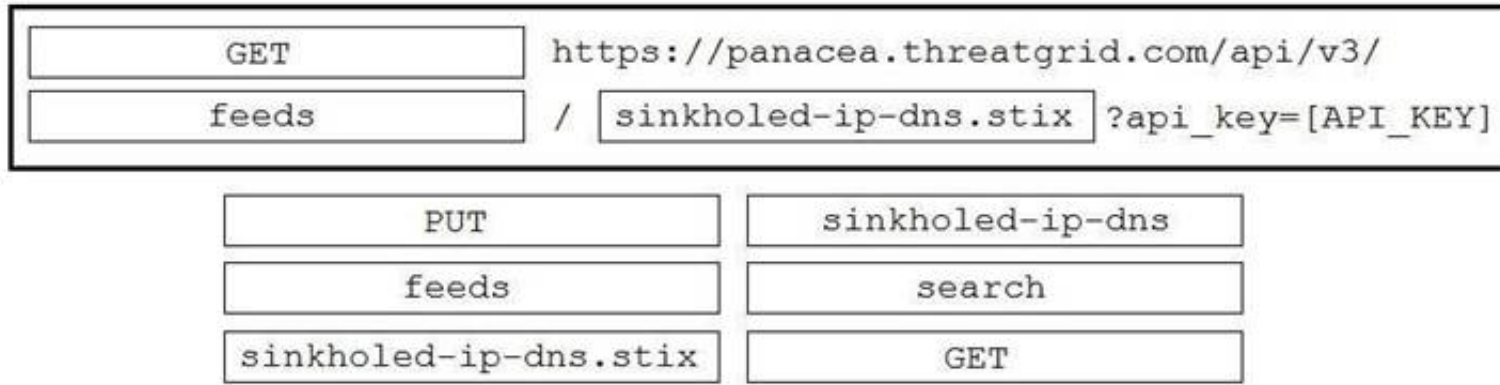

NEW QUESTION 6

For which two programming languages does Cisco offer an SDK for Cisco pxGrid 1.0? (Choose two.)

- A. Python
- B. Perl
- C. Java
- D. C
- E. JavaScript

Answer: CD

NEW QUESTION 7

If the goal is to create an access policy with the default action of blocking traffic, using Cisco Firepower Management Center REST APIs, which snippet is used?

- A.
- ```
- API PATH:
/api/fmc_config/v1/domain/<domain_uuid>/object/accesspolicies

- METHOD:
POST

- INPUT JSON:
{
 "type": "AccessPolicy",
 "name": "AccessPolicy-test-1",
 "defaultAction": {
 "action": "BLOCK"
 }
}
```
- B.
- ```
- API PATH:
/api/fmc_config/v1/domain/<domain_uuid>/object/securityzones

- METHOD:
POST

- INPUT JSON:
{
  "type": "AccessPolicy",
  "name": "AccessPolicy-test-1",
  "defaultAction": {
    "action": "BLOCK"
  }
}
```
- C.
- ```
- API PATH:
/api/fmc_config/v1/domain/<domain_uuid>/object/accesspolicies

- METHOD:
PUT

- INPUT JSON:
{
 "type": "AccessPolicy",
 "name": "AccessPolicy-test-1",
 "defaultAction": {
 "action": "BLOCK"
 }
}
```
- D.

```
- API PATH:
/api/fmc_config/v1/domain/<domain_uuid>/object/accesspolicies

- METHOD:
POST

- INPUT JSON:
{
 "type": "AccessPolicy",
 "name": "AccessPolicy-test-1",
 "action": "FASTPATH"
}
```

Answer: D

#### NEW QUESTION 8

Which API is designed to give technology partners the ability to send security events from their platform/service/appliance within a mutual customer's environment to the Umbrella cloud for enforcement?

- A. Cisco Umbrella Management API
- B. Cisco Umbrella Security Events API
- C. Cisco Umbrella Enforcement API
- D. Cisco Umbrella Reporting API

Answer: C

#### NEW QUESTION 9

Which two event types can the eStreamer server transmit to the requesting client from a managed device and a management center? (Choose two.)

- A. user activity events
- B. intrusion events
- C. file events
- D. intrusion event extra data
- E. malware events

Answer: BD

#### NEW QUESTION 10

Which two statements describe the characteristics of API styles for REST and RPC? (Choose two.)

- A. REST-based APIs function in a similar way to procedures.
- B. REST-based APIs are used primarily for CRUD operations.
- C. REST and RPC API styles are the same.
- D. RPC-based APIs function in a similar way to procedures.
- E. RPC-based APIs are used primarily for CRUD operations.

Answer: BD

#### NEW QUESTION 10

```
import requests

URL =
'https://sma.cisco.com:6080/sma/api/v2.0/reporting/web_malware_category_malware_name_user_detail/
blocked_malware?startDate=2019-03-14T02:00+00:00&endDate=2019-04-14T01:00+00:00&
filterValue=23&filterBy=na&filterOperator=is&device_type=wsa'

HEADERS = {'Authorization': "Basic Y2hlcGFLYWJSQSZe'"}

response = requests.get(URL, headers=HEADERS)
```

Refer to the exhibit.

What must be present in a Cisco Web Security Appliance before the script is run?

- A. reporting group with the name web\_malware\_category\_malware\_name\_user\_detail
- B. data for specified dates
- C. reporting group with the name blocked\_malware
- D. data in the queried category

Answer: A

#### NEW QUESTION 14

The Cisco Security Management Appliance API is used to make a GET call using the URI  
/sma/api/v2.0/reporting/mail\_incoming\_traffic\_summary/detected\_amp?startDate=2016-09-10T19:00:00.000Z&endDate=2018-0924T23:00:00.000Z&device\_type=esa&device\_name=esa01.  
What does this GET call return?

- A. values of all counters of a counter group, with the device group name and device type for web
- B. value of a specific counter from a counter group, with the device name and type for email
- C. value of a specific counter from a counter group, with the device name and type for web
- D. values of all counters of a counter group, with the device group name and device type for email

**Answer:** D

#### NEW QUESTION 16

DRAG DROP

Drag and drop the code to complete the Cisco Umbrella Investigate WHOIS query that returns a list of domains that are associated with the email address "admin@example.com". Not all options are used.

Select and Place:

|                                              |   |  |
|----------------------------------------------|---|--|
| "https://investigate.api.umbrella.com/ [ ] / |   |  |
| [ ] / [ ]                                    | " |  |

|                   |        |                     |
|-------------------|--------|---------------------|
| email             | emails | WHOIS               |
| admin@example.com | whois  | {admin@example.com} |

- A. Mastered
- B. Not Mastered

**Answer:** A

**Explanation:**

|                                                |   |                     |
|------------------------------------------------|---|---------------------|
| "https://investigate.api.umbrella.com/ WHOIS / |   |                     |
| emails                                         | / | admin@example.com " |

|                   |        |                     |
|-------------------|--------|---------------------|
| email             | emails | WHOIS               |
| admin@example.com | whois  | {admin@example.com} |

#### NEW QUESTION 20

Which header set should be sent with all API calls to the Cisco Stealthwatch Cloud API?

- A. Content-Type: application/json  
Accept: application/json  
Authorization: Bearer <api\_key>
- B. Content-Type: application/json  
Accept: application/json  
Authorization: ApiKey <username>:<api\_key>
- C. Content-Type: application/json  
Accept: application/json  
Authorization: Basic <api\_key>
- D. Content-Type: application/json  
Accept: application/json  
Authorization: <username>:<api\_key>

**Answer:** B

#### NEW QUESTION 25

Which request searches for a process window in Cisco ThreatGRID that contains the word "secret"?

- A. /api/v2/search/submissions?term=processwindow&title=secret
- B. /api/v2/search/submissions?term=processwindow&q=secret
- C. /api/v2/search/submissions?term=window&title=secret
- D. /api/v2/search/submissions?term=process&q=secret

**Answer:** D

#### NEW QUESTION 28

Which URI string is used to create a policy that takes precedence over other applicable policies that are configured on Cisco Stealthwatch?

- A. /tenants/{tenantId}/policy/system/host-policy
- B. /tenants/{tenantId}/policy/system/role-policy
- C. /tenants/{tenantId}/policy/system
- D. /tenants/{tenantId}/policy/system/{policyId}

**Answer:** A

#### NEW QUESTION 33

.....



## Thank You for Trying Our Product

### We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

### 300-735 Practice Exam Features:

- \* 300-735 Questions and Answers Updated Frequently
- \* 300-735 Practice Questions Verified by Expert Senior Certified Staff
- \* 300-735 Most Realistic Questions that Guarantee you a Pass on Your First Try
- \* 300-735 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

**100% Actual & Verified — Instant Download, Please Click**  
**[Order The 300-735 Practice Test Here](#)**